


REV.	DATE	DCN #	DRAWING TREE #
A	7 MAY 2008	E080186-00-D	
B	12 AUG 2008	E080427-00-D	

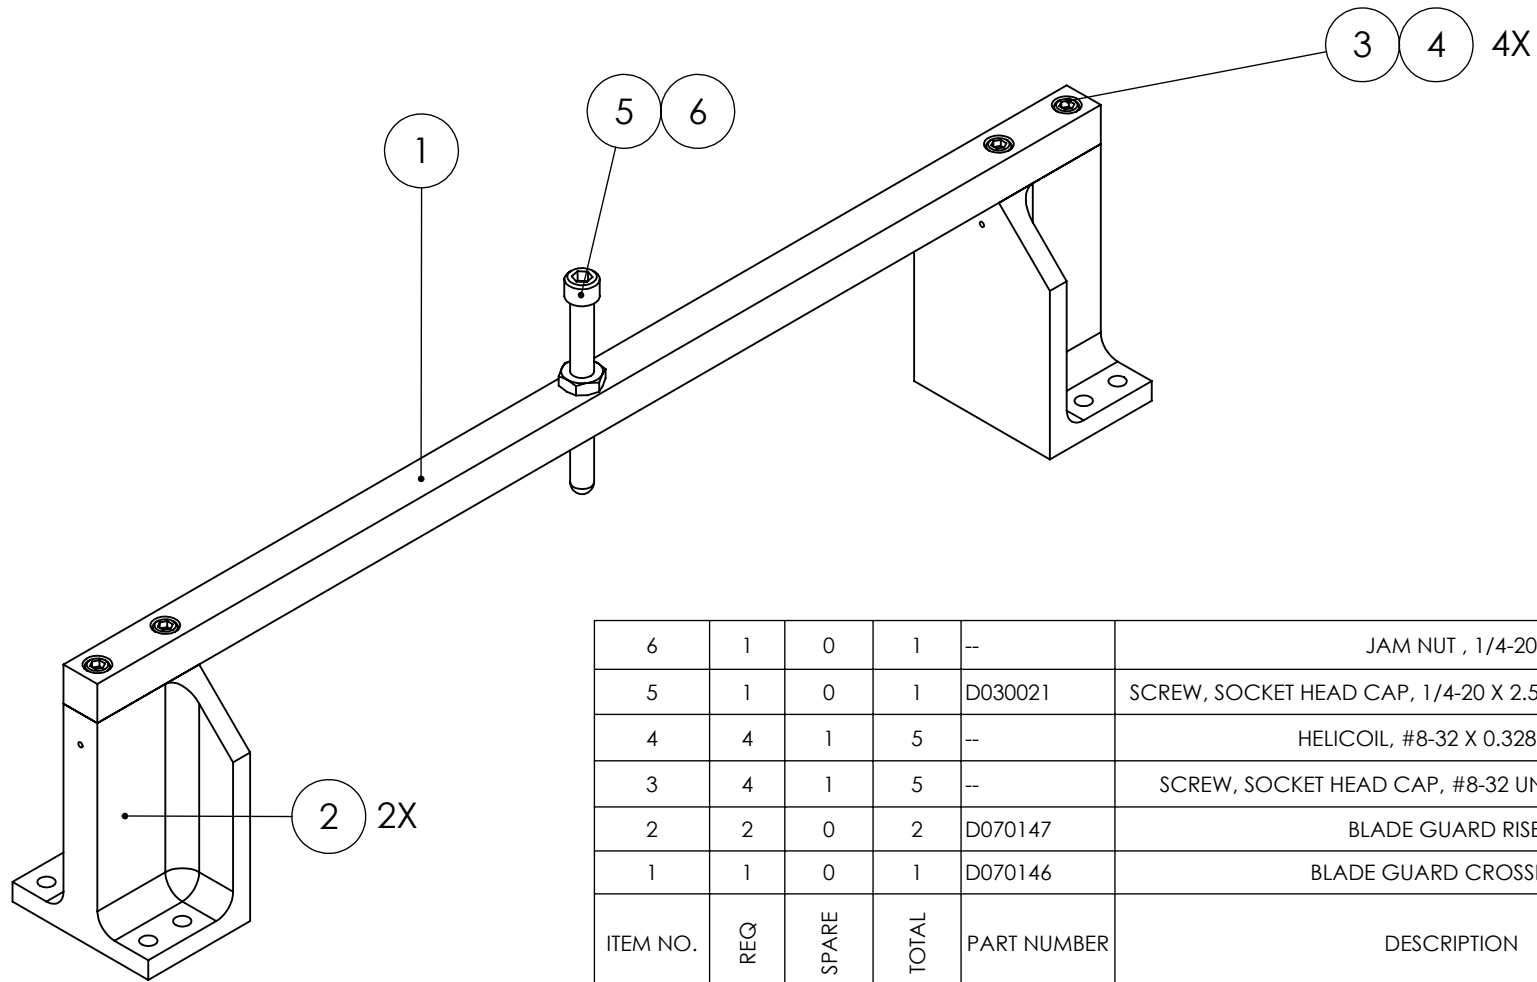

ITEM NO.	REQ	SPARE	TOTAL	PART NUMBER	DESCRIPTION	MATERIAL
6	1	0	1	--	JAM NUT , 1/4-20	300 SSSL
5	1	0	1	D030021	SCREW, SOCKET HEAD CAP, 1/4-X 2.5 LONG, ROUNDED END	316 SSSL
4	4	1	5	--	HELICOIL, #8-32 X 0.328 LONG	NITRONIC 60
3	4	1	5	--	SCREW, SOCKET HEAD CAP, #8-32 UNC-2A X 0.625 LONG	300 SSSL
2	2	0	2	D070147	BLADE GUARD RISER	6061-T6 AL
1	1	0	1	D070146	BLADE GUARD CROSSPIECE	6061-T6 AL

NOTES: (UNLESS OTHERWISE SPECIFIED)

DIMENSIONS ARE IN INCHES

TOLERANCES:

.XX ± 0.01

.XXX ± 0.005

ANGULAR ± 0.5 °

MATERIAL

--

FINISH

	NAME	DATE
DRAWN	C. ECHOLS	24 APR 2007
CHECKED	D. BRIDGES	28 APR 2008
APPROVED		



SYSTEM **ADVANCED LIGO**

SUB-SYSTEM **SUS**

NEXT ASSY **OMC**

PART NAME **TOP BLADE GUARD ASSY**

SIZE DWG. NO.

**A D070145**

REV. **B**

SCALE: 1:2 PROJECTION: SHEET 1 OF 1