



*LIGO Laboratory / LIGO Scientific Collaboration*

LIGO-T1100160-v4

*Advanced LIGO*

May 24<sup>th</sup> 2011

**aLIGO ISC QPD Transimpedance Amplifier Test Procedure**

Mohana Mageswaran, R. Abbott

Distribution of this document:  
LIGO Scientific Collaboration

This is an internal working note  
of the LIGO Laboratory.

**California Institute of Technology**  
**LIGO Project – MS 18-34**  
**1200 E. California Blvd.**  
**Pasadena, CA 91125**  
Phone (626) 395-2129  
Fax (626) 304-9834  
E-mail: [info@ligo.caltech.edu](mailto:info@ligo.caltech.edu)


**Massachusetts Institute of Technology**  
**LIGO Project – NW22-295**  
**185 Albany St**  
**Cambridge, MA 02139**  
Phone (617) 253-4824  
Fax (617) 253-7014  
E-mail: [info@ligo.mit.edu](mailto:info@ligo.mit.edu)

**LIGO Hanford Observatory**  
**P.O. Box 1970**  
**Richland WA 99352**  
Phone 509-372-8106  
Fax 509-372-8137

**LIGO Livingston Observatory**  
**P.O. Box 940**  
**Livingston, LA 70754**  
Phone 225-686-3100  
Fax 225-686-7189

## 1 Overview

This test procedure applies to ISC QPD Transimpedance Amplifier circuit board LIGO-D1001974-v2 contained within chassis assembly D1002481. A block diagram of the ISC QPD Transimpedance circuit board is shown in Figure 1. Two such QPD Transimpedance Amps and one ISC QPD Transimpedance Amplifier Interface are packaged in one chassis.

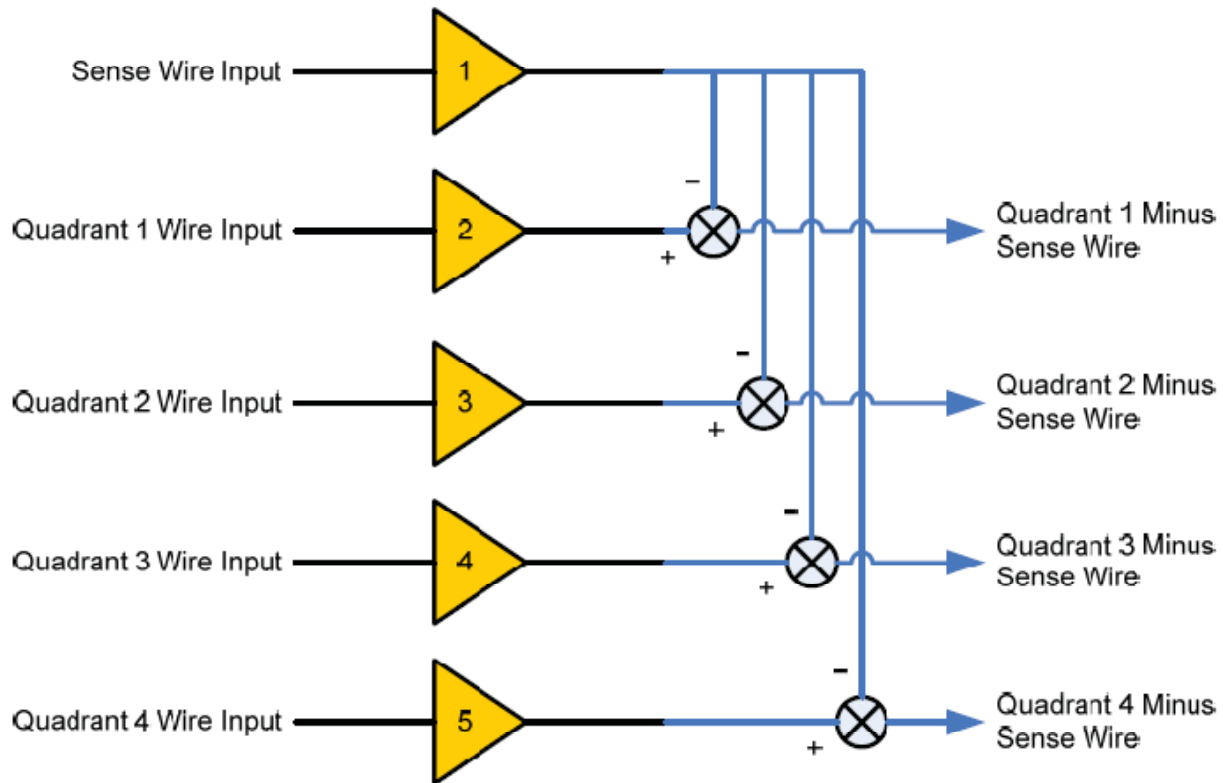

**Figure 1 QPD Transimpedance Amplifier Circuit Block Diagram**

## 2 Testing

Each production chassis must be functionally tested and the results recorded in Section 4. It is assumed that the person using this procedure is familiar with Dynamic Signal Analyzers, and rudimentary test equipment including oscilloscopes and multimeters.

### Serial Number Data


- Record all serial number data in Table 1

### DC Tests


- Apply +/- 18, +/-200 mV Volts DC to the chassis under test and record front panel LED operation, total positive and negative power supply current, internal regulator output voltage and individual circuit board power supply currents as required in Table 2.

### 3 Reference for chassis front and rear panel layout

**Figure 2: QPD Transimpedance Amplifier Chassis Front Panel**

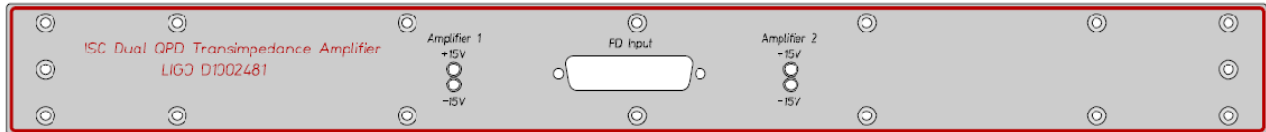

**Figure 3: QPD Transimpedance Amplifier Chassis Rear Panel**

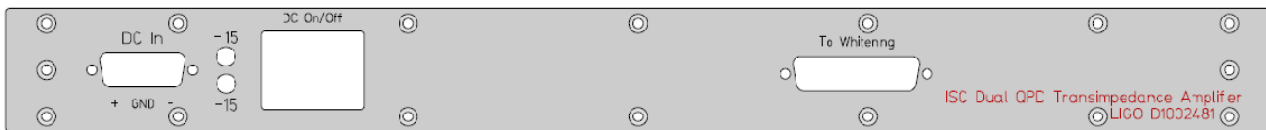

## 4 Test Data Tables

### 4.1 General Information

**Table 1 Serial Number Data**

Chassis Serial Number	DC PWR Board PCB Serial #	Amplifier 1 PCB Serial #	Amplifier 2 PCB Serial #	Interface Board PCB Serial #

### 4.2 DC Power Supply Data

Total chassis and individual circuit board quiescent current draw is recorded in Table 2. For the individual circuit boards, unplug all but one board at a time and record the chassis current draw of the +/- 18VDC supply. Use caution in believing the digital readouts of laboratory triple output power supplies. Their meters are not highly accurate. When in doubt, use a multimeter on the appropriate scale in series with the supply to be measured.

**Table 2, Record of DC Test Data**

<b>Parameter</b>	<b>Typical Value</b>	<b>Allowable Range</b>	<b>Measured Value</b>
Front Panel +/- 15VDC Power LEDs	Both Lit	N/A	
Rear Panel +/- 15VDC Power LEDs	Both Lit	N/A	
+18VDC, +/-0.2VDC <b>TOTAL</b> supply current	240 mA	+/- 50mA	
-18VDC, +/-0.2VDC <b>TOTAL</b> supply current	270 mA	+/- 50mA	
Regulated Internal DC Voltage under full load (both boards)	15 VDC	+/- 0.5VDC	

### 4.3 DC Offsets on Each Differential Output

As a general measure of the health, the DC offset at the differential outputs for each channel must be measured. Using a multimeter, measure the DC offset at each differential output on the associated rear panel D-sub connector. The input connector is to be left open. Record the results in Table 3.

**Table 3, Differential Output DC Offset**

<i>Differential DC Measurement Point</i>	<i>Typical DC Offset</i>	<i>Allowable Range</i>	<i>Measured DC Offset</i>	
			<b>Amplifier 1</b>	<b>Amplifier 2</b>
Channel 1	0VDC	+/- 5mV		
Channel 2	0VDC	+/- 5mV		
Channel 3	0VDC	+/- 5mV		
Channel 4	0VDC	+/- 5mV		

### 4.4 Frequency Response

The transfer function of each channel of the amplifier should be measured using an SR785 dynamic signal analyzer. The input impedance to all channels of this circuit is 10 ohms. Due to this low impedance, a 1k $\Omega$  resistor is required to be placed in series with the SR785 source. A simple set of clip leads and a breakout board is sufficient. The SR785 input drive level is 10mV for all swept sine measurements.

Measure the magnitude and the phase differentially at the rear panel D-sub output for each channel as required. Record the results in Table 4 through Table 13.

**Table 4 Frequency Response Amp 1 Quadrant 1**

Measurement Frequency	Magnitude (dB)	Allowable Range	Phase (deg)	Allowable Range	Measured Magnitude	Measured Phase	Pass/Fail
1Hz	15	+/- 1dB	-113	+/- 5 deg			
10Hz	34	+/- 1dB	-106	+/- 5 deg			
100Hz	45	+/- 1dB	-159	+/- 5 deg			
1KHz	46	+/- 1dB	-179	+/- 5 deg			
10KHz	46	+/- 1dB	-192	+/- 5 deg			
100KHz	39	+/- 1dB	-250	+/- 5 deg			

**Table 5 Noise Cancellation Amp 1**

Measurement Frequency	Magnitude (dB)	Allowable Range	Phase (deg)	Allowable Range	Measured Magnitude	Measured Phase	Pass/Fail
1Hz	15	+/- 1dB	67.1	+/- 5 deg			
10Hz	34	+/- 1dB	73.6	+/- 5 deg			
100Hz	45	+/- 1dB	21.4	+/- 5 deg			
1KHz	46	+/- 1dB	0.9	+/- 5 deg			
10KHz	46	+/- 1dB	-12.8	+/- 5 deg			
100KHz	39	+/- 1dB	-76.1	+/- 5 deg			

**Table 6 Frequency Response Amp 1 Quadrant 2**

Measurement Frequency	Magnitude (dB)	Allowable Range	Phase (deg)	Allowable Range	Measured Magnitude	Measured Phase	Pass/Fail
1Hz	15	+/- 1dB	-113	+/- 5 deg			
10Hz	34	+/- 1dB	-106	+/- 5 deg			
100Hz	45	+/- 1dB	-159	+/- 5 deg			
1KHz	46	+/- 1dB	-179	+/- 5 deg			
10KHz	46	+/- 1dB	-192	+/- 5 deg			
100KHz	39	+/- 1dB	-250	+/- 5 deg			

**Table 7 Frequency Response Amp 1 Quadrant 3**

Measurement Frequency	Magnitude (dB)	Allowable Range	Phase (deg)	Allowable Range	Measured Magnitude	Measured Phase	Pass/Fail
1Hz	15	+/- 1dB	-113	+/- 5 deg			
10Hz	34	+/- 1dB	-106	+/- 5 deg			
100Hz	45	+/- 1dB	-159	+/- 5 deg			
1KHz	46	+/- 1dB	-179	+/- 5 deg			
10KHz	46	+/- 1dB	-192	+/- 5 deg			
100KHz	39	+/- 1dB	-250	+/- 5 deg			

**Table 8 Frequency Response Amp 1 Quadrant 4**

Measurement Frequency	Magnitude (dB)	Allowable Range	Phase (deg)	Allowable Range	Measured Magnitude	Measured Phase	Pass/Fail
1Hz	15	+/- 1dB	-113	+/- 5 deg			
10Hz	34	+/- 1dB	-106	+/- 5 deg			
100Hz	45	+/- 1dB	-159	+/- 5 deg			
1KHz	46	+/- 1dB	-179	+/- 5 deg			
10KHz	46	+/- 1dB	-192	+/- 5 deg			
100KHz	39	+/- 1dB	-250	+/- 5 deg			

**Table 9 Frequency Response Amp2\_Quadrant 1**

Measurement Frequency	Magnitude (dB)	Allowable Range	Phase (deg)	Allowable Range	Measured Magnitude	Measured Phase	Pass/Fail
1Hz	15	+/- 1dB	-113	+/- 5 deg			
10Hz	34	+/- 1dB	-106	+/- 5 deg			
100Hz	45	+/- 1dB	-159	+/- 5 deg			
1KHz	46	+/- 1dB	-179	+/- 5 deg			
10KHz	46	+/- 1dB	-192	+/- 5 deg			
100KHz	39	+/- 1dB	-250	+/- 5 deg			

**Table 10 Frequency Response Amp 2 Quadrant 2**

Measurement Frequency	Magnitude (dB)	Allowable Range	Phase (deg)	Allowable Range	Measured Magnitude	Measured Phase	Pass/Fail
1Hz	15	+/- 1dB	-113	+/- 5 deg			
10Hz	34	+/- 1dB	-106	+/- 5 deg			
100Hz	45	+/- 1dB	-159	+/- 5 deg			
1KHz	46	+/- 1dB	-179	+/- 5 deg			
10KHz	46	+/- 1dB	-192	+/- 5 deg			
100KHz	39	+/- 1dB	-250	+/- 5 deg			

**Table 11 Frequency Response Amp2\_Quadrant 3**

Measurement Frequency	Magnitude (dB)	Allowable Range	Phase (deg)	Allowable Range	Measured Magnitude	Measured Phase	Pass/Fail
1Hz	15	+/- 1dB	-113	+/- 5 deg			
10Hz	34	+/- 1dB	-106	+/- 5 deg			
100Hz	45	+/- 1dB	-159	+/- 5 deg			
1KHz	46	+/- 1dB	-179	+/- 5 deg			
10KHz	46	+/- 1dB	-192	+/- 5 deg			
100KHz	39	+/- 1dB	-250	+/- 5 deg			

**Table 12 Frequency Response Amp 2 Quadrant 4**

Measurement Frequency	Magnitude (dB)	Allowable Range	Phase (deg)	Allowable Range	Measured Magnitude	Measured Phase	Pass/Fail
1Hz	15	+/- 1dB	-113	+/- 5 deg			
10Hz	34	+/- 1dB	-106	+/- 5 deg			
100Hz	45	+/- 1dB	-159	+/- 5 deg			
1KHz	46	+/- 1dB	-179	+/- 5 deg			
10KHz	46	+/- 1dB	-192	+/- 5 deg			
100KHz	39	+/- 1dB	-250	+/- 5 deg			

**Table 13 Noise Cancellation Amp 2**

Measurement Frequency	Magnitude (dB)	Allowable Range	Phase (deg)	Allowable Range	Measured Magnitude	Measured Phase	Pass/Fail
1Hz	15	+/- 1dB	67.1	+/- 5 deg			
10Hz	34	+/- 1dB	73.6	+/- 5 deg			
100Hz	45	+/- 1dB	21.4	+/- 5 deg			
1KHz	46	+/- 1dB	0.9	+/- 5 deg			
10KHz	46	+/- 1dB	-12.8	+/- 5 deg			
100KHz	39	+/- 1dB	-76.1	+/- 5 deg			



#### 4.5 Output Noise Spectra

The output noise voltage of each channel of the amplifier should be measured using the dynamic signal analyzer SR785. This measurement should be made while the input is open, and the frequency range is set from 1Hz to 100 KHz.

Measure the output referred noise differentially at the rear panel D-sub output for each channel as required. Record the results in Table 14 to Table 21

**Table 14 Amp 1 Quadrant 1 Noise**

Measurement Frequency	Typical Amplitude dBVrms/ $\sqrt{\text{Hz}}$	Allowable Range	Measured Amplitude dBVrms/ $\sqrt{\text{Hz}}$	Pass/Fail
10Hz	-130	+/- 2dB		
100Hz	-118	+/- 2dB		
1KHz	-118	+/-2dB		
10KHz	-118	+/-2dB		

**Table 15 Amp 1 Quadrant 2 Noise**

Measurement Frequency	Typical Amplitude dBVrms/ $\sqrt{\text{Hz}}$	Allowable Range	Measured Amplitude dBVrms/ $\sqrt{\text{Hz}}$	Pass/Fail
10Hz	-130	+/- 2dB		
100Hz	-118	+/- 2dB		
1KHz	-118	+/-2dB		
10KHz	-118	+/-2dB		

**Table 16 Amp 1 Quadrant 3 Noise**

Measurement Frequency	Typical Amplitude dBVrms/ $\sqrt{\text{Hz}}$	Allowable Range	Measured Amplitude dBVrms/ $\sqrt{\text{Hz}}$	Pass/Fail
10Hz	-130	+/- 2dB		
100Hz	-118	+/- 2dB		
1KHz	-118	+/-2dB		
10KHz	-118	+/-2dB		

**Table 17 Amp 1 Quadrant 4 Noise**

Measurement Frequency	Typical Amplitude dBVrms/ $\sqrt{\text{Hz}}$	Allowable Range	Measured Amplitude dBVrms/ $\sqrt{\text{Hz}}$	Pass/Fail
10Hz	-130	+/- 2dB		
100Hz	-118	+/- 2dB		
1KHz	-118	+/-2dB		
10KHz	-118	+/-2dB		

**Table 18 Amp 2 Quadrant 1 Noise**

Measurement Frequency	Typical Amplitude dBVrms/ $\sqrt{\text{Hz}}$	Allowable Range	Measured Amplitude dBVrms/ $\sqrt{\text{Hz}}$	Pass/Fail
10Hz	-130	+/- 2dB		
100Hz	-118	+/- 2dB		
1KHz	-118	+/-2dB		
10KHz	-118	+/-2dB		



**Table 19 Amp2\_Quadrant 2 Noise**

Measurement Frequency	Typical Amplitude dBVrms/ $\sqrt{\text{Hz}}$	Allowable Range	Measured Amplitude dBVrms/ $\sqrt{\text{Hz}}$	Pass/Fail
10Hz	-130	+/- 2dB		
100Hz	-118	+/- 2dB		
1KHz	-118	+/-2dB		
10KHz	-118	+/-2dB		

**Table 20 Amp2\_Quadrant 3 Noise**

Measurement Frequency	Typical Amplitude dBVrms/ $\sqrt{\text{Hz}}$	Allowable Range	Measured Amplitude dBVrms/ $\sqrt{\text{Hz}}$	Pass/Fail
10Hz	-130	+/- 2dB		
100Hz	-118	+/- 2dB		
1KHz	-118	+/-2dB		
10KHz	-118	+/-2dB		

**Table 21 Amp2\_Quadrant 4 Noise**

Measurement Frequency	Typical Amplitude dBVrms/ $\sqrt{\text{Hz}}$	Allowable Range	Measured Amplitude dBVrms/ $\sqrt{\text{Hz}}$	Pass/Fail
10Hz	-130	+/- 2dB		
100Hz	-118	+/- 2dB		
1KHz	-118	+/-2dB		
10KHz	-118	+/-2dB		