

|           |                  |
|-----------|------------------|
| Author:   | Alexa Staley     |
| Refer to: | LIGO-E1200086-v2 |
| Date:     | March 5, 2014    |

## Common Mode Summing Node Test Procedure

### Test Preparation

Enter Name, Date, and Board Serial Number. Indicate if the board has passed or failed the test.

| Test Engineer: | Board Serial Number: | Date:    | Pass: |
|----------------|----------------------|----------|-------|
| Alexa Staley   | S1203944             | 03/08/14 | Pass  |

### Required Test and Ancillary Equipment


- 2 – Summing Node Board D1300788-v1 Tester
- 1 – Tektronix AFG 3101 Signal Generator or equivalent
- 1 – Tektronix TDS 210 Oscilloscope or equivalent
- 1 – Fluke Multimeter or equivalent
- 1 – HP 4395A Network analyzer (1Hz to 10MHz) or equivalent
- 1 – Stanford Research Systems Signal Analyzer Model SR785
- 1 – GPIB to Cat5 adapter
- 1 – Cat5 cable
- 1 – Laptop CPU using Windows operating system
- 1 – Folder containing Test File Scripts
- 2 – DC Power Supplies (Five Channels Required. Continuous Supply Voltages: +/- 24VDC, +/- 17VDC, and +5VDC)
- 1 – 17VDC Power Cable
- 1 – 24VDC Power Cable
- 1 – 5VDC Power Cable (Banana Plug to Banana Plug Cable and Jumper)
- 1 – custom cable adapting the DB9 Monitor port on the D0901781 front panel into three BNCs. (Refer to Common Mode Board: DAQ, Number D040180 Rev E, Sheet 17 of 17 for DB9 pinout detail)
- 3 – BNC Female to Female Adapters (Barrels)
- 1 – BNC Tee Connector
- 3 – BNC Female to Double Stacking Banana Plugs
- 1 – BNC Male to Mini Grabber Test Leads Cable
- 2 – 50 ohm BNC terminations
- 4 – BNC Male to BNC Male Cables

## Table of Contents

|  |    |
|--|----|
| <b>Test Preparation</b> .....                      | 1  |
| <b>Required Test and Ancillary Equipment</b> ..... | 1  |
| <b>Important Notes</b> .....                       | 3  |
| <b>Tests Part 1</b> .....                          | 4  |
| Power Board Voltage .....                          | 4  |
| Power Supplies Test.....                           | 4  |
| Oscillations.....                                  | 5  |
| Check DC Bias.....                                 | 6  |
| Signal Gain.....                                   | 7  |
| Crossbar Switches.....                             | 10 |
| Excitation .....                                   | 11 |
| Filter/Option.....                                 | 12 |
| EPICS Readbacks.....                               | 12 |
| <b>Tests Part 2</b> .....                          | 13 |
| <b>Important Notes</b> .....                       | 13 |
| Power Board Noise.....                             | 13 |
| Monitor Channel Filtering.....                     | 14 |
| Adjustment Channel Filtering.....                  | 15 |
| Distortion Measurement.....                        | 15 |
| Noise Spectra.....                                 | 15 |
| Basic Transfer Functions.....                      | 16 |
| Transfer Functions of Boost Gain Stages.....       | 17 |
| Transfer Functions of DAQ Channels.....            | 18 |
| Transfer Functions of Filters.....                 | 19 |
| <b>Tests Part 3</b> .....                          | 18 |
| High Frequency Transfer Function.....              | 20 |

**IMPORTANT NOTES:**

1. On the Summing Node Tester (D1300789-v1) front panel, all switches must be returned to default positions after each test and/or step, unless otherwise instructed.
2. The default position for most switches is UP  
The switch default positions are shown in Picture 1 below.
3. "Left" and "Right" indicate the PCB as viewed from the front of the Summing Node chassis.

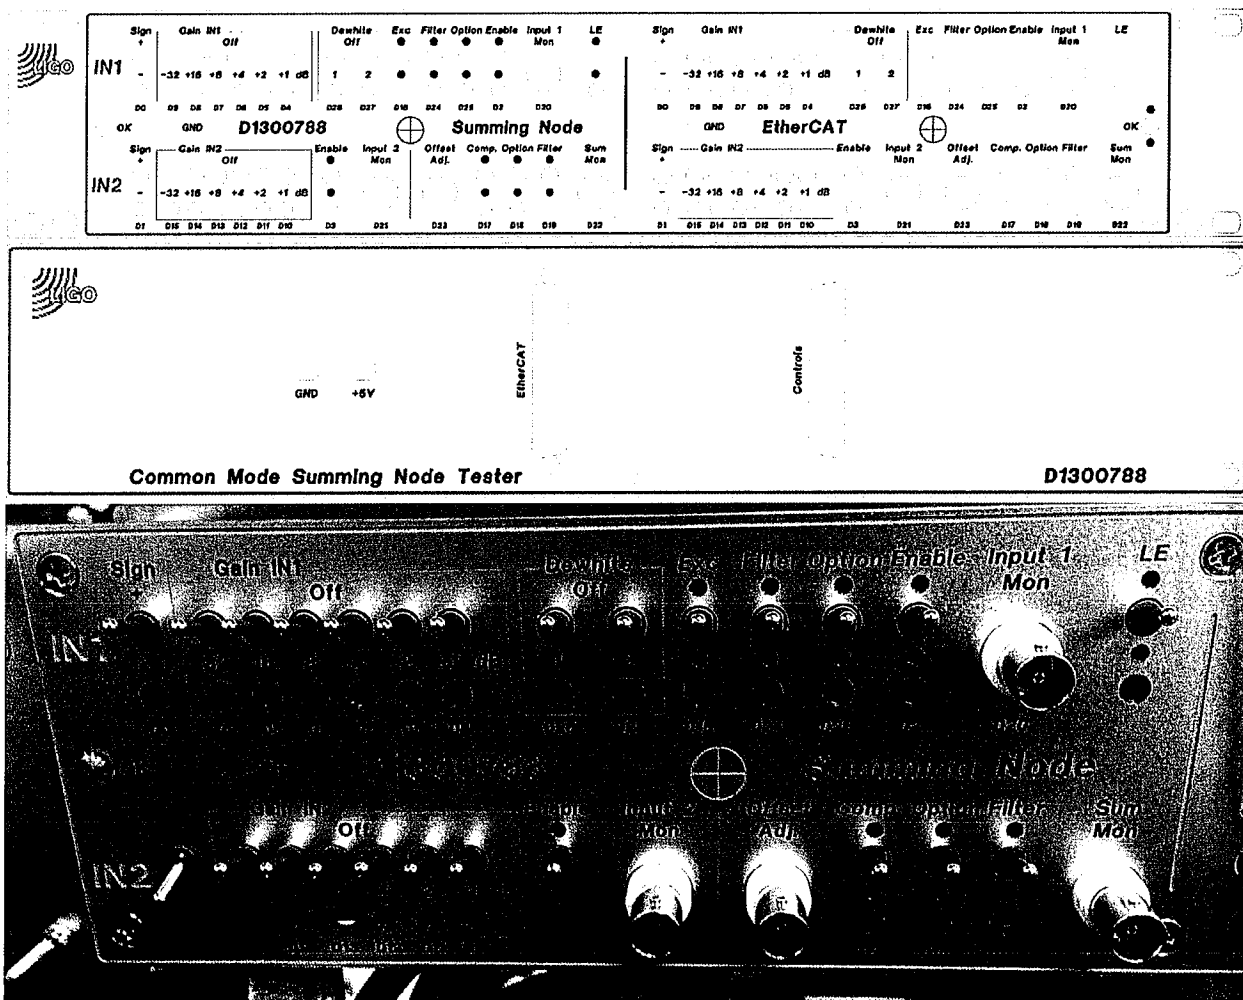

**Picture 1**  
**Front and Rear of Summing Node Tester**

**Tests Part 1.**

***1) Power Board Voltage (Low Noise Power Circuit Board Assembly D0901846)***

Connect +/-17VDC and +/- 24VDC to the Common Mode Summing Node and +5VDC to the Summing Node Tester.

**Turn ON Power Supplies.**

On the Low Noise Power Circuit Board Assembly, **Connect** the positive multimeter test lead to the following test points and **Connect** the negative multimeter test lead to GRD.

**Record** the observed voltages in the data boxes below.

**Turn Off Power Supplies.**

| TP1  | TP2  | TP3 | TP4 | TP5 | TP6  | TP7  | TP8 | TP9  | TP10 | TP11 | TP12  | TP13  |
|------|------|-----|-----|-----|------|------|-----|------|------|------|-------|-------|
| ✓    | ✓    | ✓   | ✓   | ✓   | ✓    | ✓    | ✓   | ✓    | ✓    | ✓    | ✓     | ✓     |
| +17V | -17V | GND | GND | +5V | -15V | +24V | GND | -24V | GND  | +15V | +VREF | -VREF |

\*\* Correct voltage indications are: TP14 ~3VDC and front panel OK light lit.

***2) Power Supplies***

**Turn OFF Power Supplies.**

Connect 50 pin Control cables 1 and 2 to corresponding Control Mode Servo Tester and Summing Node rear jacks.



**Picture 2**  
**Rear of Common Mode Summing Node Board**

**Turn ON Power Supplies**

**Check** current draw from the ±17V power supply is between 0.3A and 0.6A.

On the front panel of Power Supplies, **Observe** and **Record** the amperage displayed.

| Power supply | Current (A) | Nominal (A) |
|--------------|-------------|-------------|
| +24V         | 0.02        | 0.02        |
| -24V         | 0.03        | 0.02        |
| +17V         | 0.69        | .45         |
| -17V         | 0.69        | .45         |


### 3) Oscillations

Set oscilloscope coupling to **AC Coupling**.

**Connect** oscilloscope probe to the following outputs. Ensure no oscillating waveforms are observed.

Use P2 pins 1+2 for I1MON P+N, pins 3+4 for I2MON P+N, pins 4+6 for SMON P+N.  
**Connect** controls output to tester.

Place checkmark in corresponding box below each output.

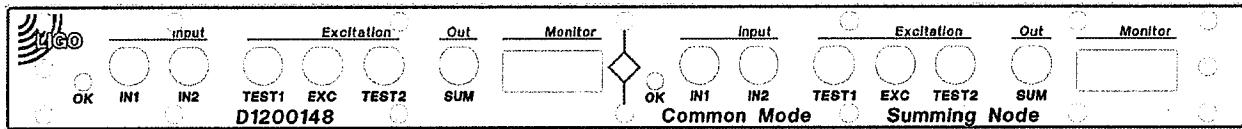

**Picture 3**  
**Front of Common Mode Summing Node Board**

*Right Front Panel Outputs:*

| Outputs   | SUM Out | Test 1 | Test 2 |
|-----------|---------|--------|--------|
| Check Box | ✓       | ✓      | ✓      |
| Outputs   | I1MON   | I2MON  | SMON   |
| Check Box | ✓       | ✓      | ✓      |

*Right Rear Panel Outputs:*

| Outputs   | D20<br>Input 1<br>Mon | D21<br>Input 2<br>Mon | D22<br>Sum<br>Mon |
|-----------|-----------------------|-----------------------|-------------------|
| Check Box | ✓                     | ✓                     | ✓                 |

*Left Front Panel Outputs:*

| Outputs   | SUM Out | Test 1 | Test 2 |
|-----------|---------|--------|--------|
| Check Box | ✓       | ✓      | ✓      |
| Outputs   | I1MON   | I2MON  | SMON   |
| Check Box | ✓       | ✓      | ✓      |

*Left Rear Panel Outputs:*

| Outputs   | D20<br>Input 1<br>Mon | D21<br>Input 2<br>Mon | D22<br>Sum<br>Mon |
|-----------|-----------------------|-----------------------|-------------------|
| Check Box | ✓                     | ✓                     | ✓                 |

**4) Check DC Bias**

Check DC Bias at the outputs and monitors. Pass if around 0 VDC

*Right:*

|                   |       |     |           |
|-------------------|-------|-----|-----------|
| Input Mon 1 (D20) | 0.003 | VDC | Pass/Fail |
| Input Mon 2 (D21) | 0.010 | VDC | Pass/Fail |
| Sum Mon (D22)     | 0.020 | VDC | Pass/Fail |
| Sum OUT           | 0.020 | VDC | Pass/Fail |
| I1MON (P2)        | 0.070 | VDC | Pass/Fail |
| I2MON (P2)        | 0.039 | VDC | Pass/Fail |
| SMON (P2)         | 0.070 | VDC | Pass/Fail |

*Left:*

|                   |       |     |           |
|-------------------|-------|-----|-----------|
| Input Mon 1 (D20) | 0.007 | VDC | Pass/Fail |
| Input Mon 2 (D21) | 0.002 | VDC | Pass/Fail |
| Sum Mon (D22)     | 0.023 | VDC | Pass/Fail |
| Sum OUT           | 0.017 | VDC | Pass/Fail |
| I1MON (P2)        | 0.07  | VDC | Pass/Fail |

|            |       |     |           |
|------------|-------|-----|-----------|
| I2MON (P2) | 0.053 | VDC | Pass/Fail |
| SMON (P2)  | 0.003 | VDC | Pass/Fail |

### 5) Signal Gain

#### Gain slider IN1:

Connect Input 1 Mon (or Test 1) to the oscilloscope.

Connect Function Generator Output to Common Mode Summing node IN1 jack.

Set Function Generator to frequency 10Hz, Sine wave, and an Amplitude of 1 Vpp.

Inject a 10Hz / 1Vpp Sine wave signal.

Measure the voltage at 0dB (all switches in default position) and Record.

Individually, Toggle each switch down (GND) and Record observed voltage. After each voltage observation, Return the switch to default position.

Continue to Toggle each switch, Record the observed voltage and Return each switch to default position.

\*\* Tolerance is + / - 1.059 V (+/-0.5dB).

Right:

| Binary input (Switch Setting) | Measured Vpp | Nominal Vpp |
|-------------------------------|--------------|-------------|
| —(0dB)                        | 1V           | 1           |
| D4 (1dB)                      | 1.11V        | 1.12        |
| D5 (2dB)                      | 1.26V        | 1.26        |
| D6 (4dB)                      | 1.58V        | 1.59        |
| D7 (8dB)                      | 2.5V         | 2.51        |
| D8 (16dB)                     | 6.36V        | 6.31        |
| D7 & D8 (24dB)                | 14.6V        | 15.9        |
| D9 (-32dB)                    | 0.035        | 0.025       |
| D9 & D7 (-24dB)               | 0.072        | 0.063       |
| D9 & D8 (-16dB)               | 0.166        | 0.159       |

|                     |       |       |
|---------------------|-------|-------|
| D9 & D8 & D7 (-8dB) | 0.404 | 0.398 |
|---------------------|-------|-------|

*Left:*

| Binary input (Switch Setting) | Measured Vpp | Nominal Vpp |
|-------------------------------|--------------|-------------|
| —(0dB)                        | 1            | 1           |
| D4 (1dB)                      | 1.12         | 1.12        |
| D5 (2dB)                      | 1.22         | 1.26        |
| D6 (4dB)                      | 1.68         | 1.59        |
| D7 (8dB)                      | 2.5          | 2.51        |
| D8 (16dB)                     | 6.32         | 6.31        |
| D7 & D8 (24dB)                | 14.6         | 15.9        |
| D9 (-32dB)                    | 0.036        | 0.025       |
| D9 & D7 (-24dB)               | 0.74         | 0.063       |
| D9 & D8 (-16dB)               | 0.168        | 0.159       |
| D9 & D8 & D7 (-8dB)           | 0.408        | 0.398       |



**Gain slider IN2:**

**Connect** Input 2 Mon to an oscilloscope.

**Set** Function Generator to frequency 100Hz, Sine wave and an Amplitude of 1 Vpp.

**Connect** Function Generator Output to Common Mode Summing Node IN2 jack.

**Inject** a 100Hz / 1Vpp Sine wave signal into IN2.

**Measure** the voltage at 0dB (all switches in default position) and **Record**.

**Toggle** each switch individually **Down** (GND) and **Record** observed voltage. **Return** the switch to default position.

Continue to **Toggle** each switch, **Record** the observed voltage and **Return** each switch to default position.

\*\* Tolerance is +/- 1.059 V (+/-0.5dB).

*Right:*

| Binary Input (slider gain) | Measured Vpp | Nominal Vpp |
|----------------------------|--------------|-------------|
| — (0dB)                    | 1.08 V       | 1           |
| D10 (1dB)                  | 1.16 V       | 1.12        |
| D11 (2dB)                  | 1.32 V       | 1.26        |
| D12 (4dB)                  | 1.64 V       | 1.59        |
| D13 (8dB)                  | 2.52 V       | 2.51        |
| D14 (16dB)                 | 6.60 V       | 6.31        |
| D13 & D14 (24dB)           | 15 V         | 15.9        |
| D15 (-32dB)                | 0.036 V      | 0.025       |
| D15 & D13 (-24dB)          | 0.076 V      | 0.063       |
| D15 & D14 (-16dB)          | 0.172 V      | 0.159       |
| D15 & D14 & D13 (-8dB)     | 0.408 V      | 0.398       |

Left:

| Binary Input (slider gain) | Measured Vpp | Nominal Vpp |
|----------------------------|--------------|-------------|
| — (0dB)                    | 1.02         | 1           |
| D10 (1dB)                  | 1.12         | 1.12        |
| D11 (2dB)                  | 1.25         | 1.26        |
| D12 (4dB)                  | 1.59         | 1.59        |
| D13 (8dB)                  | 2.54         | 2.51        |
| D14 (16dB)                 | 6.60         | 6.31        |
| D13 & D14 (24dB)           | 15.0         | 15.9        |
| D15 (-32dB)                | 0.036        | 0.025       |
| D15 & D13 (-24dB)          | 0.071        | 0.063       |
| D15 & D14 (-16dB)          | 0.170        | 0.159       |
| D15 & D14 & D13 (-8dB)     | 0.408        | 0.398       |

### 6) Crossbar switches

Inject a 100Hz/1Vpp Sine wave to IN1. Individually, Toggle each Crossbar switches Down. Using an oscilloscope, Record the voltage states at each SUM Out. Voltage states are either ON or OFF.

| Binary input                      | SUM Out Right       | Nominal | SUM Out Left        | Nominal |
|-----------------------------------|---------------------|---------|---------------------|---------|
| Switches in Default Positions     | 1.04V <sub>pp</sub> | On      | 1.04V <sub>pp</sub> | Off On  |
| D2 (input 1 disabled)             | 0V <sub>pp</sub>    | Off     | 0V <sub>pp</sub>    | Off Off |
| D3 (input 2 enabled) (1 disabled) | 0V <sub>pp</sub>    | Off     | 0V <sub>pp</sub>    | Off Off |

Inject a 100Hz/1Vpp Sine wave to IN2. Record the voltage states at each SUM Out 2 while toggling the switches Down. Voltages states are either ON or OFF.

| Binary input                      | SUM Out Right       | Nominal | SUM Out Left        | Nominal |
|-----------------------------------|---------------------|---------|---------------------|---------|
| Switches in Default Positions     | 0V <sub>pp</sub>    | Off     | 0V <sub>pp</sub>    | Off     |
| D2 (input 1 disabled)             | 0V <sub>pp</sub>    | Off     | 0V <sub>pp</sub>    | Off     |
| D3 (input 2 enabled) (1 disabled) | 1.08V <sub>pp</sub> | On      | 1.08V <sub>pp</sub> | On      |

**7) Excitation:**

Inject a 100Hz/<sup>1Vpp</sup>10Vpp Sine wave to IN1. Measure and Record the voltage at TEST1 and TEST2. \*\* Tolerance is +/-0.5dB.

*Right:*

| Binary input        | TEST1               | Nominal Vpp | TEST2   | Nominal Vpp |
|---------------------|---------------------|-------------|---------|-------------|
| Switches in Default | <del>Off</del> 1Vpp | 1.00        | -1.0Vpp | -1.00       |

*Left:*

| Binary input        | TEST1 | Nominal Vpp | TEST2 | Nominal Vpp |
|---------------------|-------|-------------|-------|-------------|
| Switches in Default | 1Vpp  | 1.00        | -1Vpp | -1.00       |

Inject a 100Hz/10Vpp Sine wave to EXC. Measure and Record the voltage at TEST2 and Sum OUT while toggling the switches Down. \*\* Tolerance is +/-0.5dB.

*Right:*

| Binary input           | TEST2    | Nominal Vpp | SUM Out  | Nominal Vpp |
|------------------------|----------|-------------|----------|-------------|
| Default                | 0Vpp     | Off         | 0Vpp     | Off         |
| D16 (exc enable)       | 1Vpp     | 1.00        | 1.02Vpp  | 1.00        |
| D16 & D26 (DW1)        | 0.086Vpp | 0.10        | 0.086Vpp | 0.10        |
| D16 & D27 (DW2)        | 0.086Vpp | 0.10        | 0.086Vpp | 0.10        |
| D16 & D26, 27 (DW1, 2) | 0.01Vpp  | 0.01        | 0.01Vpp  | 0.01        |

*Left:*

| Binary input           | TEST2    | Nominal Vpp | SUM Out  | Nominal Vpp |
|------------------------|----------|-------------|----------|-------------|
| Default                | 0Vpp     | Off         | 0Vpp     | Off         |
| D16 (exc enable)       | 1.02Vpp  | 1.00        | 1.02Vpp  | 1.00        |
| D16 & D26 (DW1)        | 0.086Vpp | 0.10        | 0.086Vpp | 0.10        |
| D16 & D27 (DW2)        | 0.086Vpp | 0.10        | 0.086Vpp | 0.10        |
| D16 & D26, 27 (DW1, 2) | 0.01Vpp  | 0.01        | 0.01Vpp  | 0.01        |

### 8) Filter/Option

Inject a 100Hz/1Vpp Sine wave to IN1. Measure and Record the voltage at SUM Out while toggling the switches Down. \*\* Tolerance is +/-0.5dB.

*Right:*

| Binary input            | SUM Out | Nominal Vpp |
|-------------------------|---------|-------------|
| —                       | 1       | 1.00        |
| D17 (SUM comp. enable)  | 1       | 1.00        |
| D18 (SUM filter enable) | 1       | 1.00        |
| D19 (SUM option enable) | 0       | 0.00        |
| D24 (IN1 filter enable) | 1       | 1.00        |
| D25 (IN1 option enable) | 0       | 0.00        |

*Left:*

| Binary input            | SUM Out | Nominal Vpp |
|-------------------------|---------|-------------|
| —                       | 1       | 1.00        |
| D17 (SUM comp. enable)  | 1       | 1.00        |
| D18 (SUM filter enable) | 1       | 1.00        |
| D19 (SUM option enable) | 0       | 0.00        |
| D24 (IN1 filter enable) | 1       | 1.00        |
| D25 (IN1 option enable) | 0       | 0.00        |

Note: D18/D19 are mislabeled on tester.

### 9) EPICS Readbacks

Inject a 100Hz/1Vpp Sine wave to IN1 or IN2 and Record the observed voltage.

*Right:*

| EPICS readback    | 1Hz   | Nominal Vpp | 100Hz                | Nominal Vpp |
|-------------------|-------|-------------|----------------------|-------------|
| D20 (input mon 1) | -0.5V | -1.00       | 0.088V <sub>pp</sub> | 0.080       |
| D21 (input mon 2) | -0.5V | -1.00       | 0.090V <sub>pp</sub> | 0.080       |
| D22 (sum mon)     | -0.5V | -1.00       | 0.086V <sub>pp</sub> | 0.080       |

Left:

| EPICS readback    | 1Hz   | Nominal Vpp | 100Hz  | Nominal Vpp |
|-------------------|-------|-------------|--------|-------------|
| D20 (input mon 1) | -0.5V | -1.00       | 0.088V | 0.080       |
| D21 (input mon 2) | -0.5V | -1.00       | 0.088V | 0.080       |
| D22 (sum mon)     | -0.5V | -1.00       | 0.088V | 0.080       |

## Tests Part 2: SR785 Signal Analyzer Tests

**Important Notes: 1. Ensure all Summing Node Tester switches are in the default position. 2. Closely Read and follow all On-Screen prompts.**

On a Windows operating system laptop, Create and Save a file called TEST\_DATA to C: drive. The path is C:\Test\_DATA\.

Save Test Scripts in TEST\_DATA.

Connect an SR785 Signal Analyzer to the laptop with a GPIB to Cat5 adapter.

From the DOS CMD window, Type cd., Enter, Type cd., Enter and Type cd SummingNode\_TEST\_DATA.

Type and Run 'setgpi.bat' and Enter the adapter's IP address (which should be labeled on the adapter).

Reset the SR785's settings with 'resetSR785.bat'. If the SR785 resets when the script is run, the SR785 is properly connected to the PC.

### **10) Power Board Noise (SR785PowerBoardNoise.bat)**

One pair of probes (MiniGrabbers) are required to check the noise levels at 140Hz on the low noise power board.

In the DOS CMD window, Type SR785PowerBoardNoise.

Read and Follow the On-Screen prompts for proper test equipment configuration and procedure.

Record the collected On-Screen data in the boxes below.

\*\* Test values must be less than the values indicated in the table below.

| TP11 | < [nV/√Hz] | TP12 | < [nV/√Hz] | TP13 | < [nV/√Hz] | TP6 | < [nV/√Hz] |
|------|------------|------|------------|------|------------|-----|------------|
| ~10  | 30         | ~9   | 20         | ~13  | 30         | ~22 | 30         |

Note: TP11, TP12, TP13, TP6 indicate the noise performance of P15V, VREF, NREF, and N15V respectively, which are the voltages we are regulating.

### 11) Monitor Channel Filtering (SR785MonitorTFs.bat)

In the DOS CMD window, Type SR785MonitorTFs

Read and Follow the On-Screen prompts for proper test equipment configuration and procedure.

Measure test transfer functions at 100Hz to 1Hz on IN1 to the indicated monitor channels on the tester and Record the data in the table below.

\*\* Tolerances for Lowpass filtering are +/-1dB and +/-5deg from nominal.

Right:

| Boost #           | @1Hz                | Nominal          | @10Hz                | Nominal          | @100Hz               | Nominal        |
|-------------------|---------------------|------------------|----------------------|------------------|----------------------|----------------|
| Input Mon 1 (D20) | -0.45 dB<br>173 deg | -0.1dB<br>173deg | -4.5 dB<br>128.7 deg | -4.1dB<br>129deg | -22.4 dB<br>96 deg   | -22dB<br>95deg |
| Sum Mon (D22)     | -0.5 dB<br>173 deg  | -0.1dB<br>173deg | -4.6 dB<br>128.5 deg | -4.1dB<br>129deg | -22.5 dB<br>97.7 deg | -22dB<br>95deg |

Left:

| Boost #           | @1Hz                | Nominal          | @10Hz                | Nominal          | @100Hz               | Nominal        |
|-------------------|---------------------|------------------|----------------------|------------------|----------------------|----------------|
| Input Mon 1 (D20) | -0.44 dB<br>173 deg | -0.1dB<br>173deg | -4.5 dB<br>128.4 deg | -4.1dB<br>129deg | -21.9 dB<br>93 deg   | -22dB<br>95deg |
| Sum Mon (D22)     | -0.5 dB<br>173 deg  | -0.1dB<br>173deg | -4.6 dB<br>128.3 deg | -4.1dB<br>129deg | -22.2 dB<br>96.4 deg | -22dB<br>95deg |

Measure test transfer functions at 100Hz to 1Hz on IN2 to the indicated monitor channels on the tester and Record the data in the table below.

Toggle D2 down (off), and Toggle D3 down (on).

\*\* Tolerances for Lowpass filtering are +/-1dB and +/-5deg from nominal.

Right:

| Boost #           | @1Hz                  | Nominal          | @10Hz                | Nominal          | @100Hz               | Nominal        |
|-------------------|-----------------------|------------------|----------------------|------------------|----------------------|----------------|
| Input Mon 2 (D21) | -0.31 dB<br>173.1 deg | -0.1dB<br>173deg | -4.4 dB<br>128.4 deg | -4.1dB<br>129deg | -22.3 dB<br>94.5 deg | -22dB<br>95deg |
| Sum Mon (D22)     | -0.38 dB<br>173.1 deg | -0.1dB<br>173deg | -4.4 dB<br>128.5 deg | -4.1dB<br>129deg | -22.3 dB<br>94.8 deg | -22dB<br>95deg |

Left:

| Boost #           | @1Hz              | Nominal          | @10Hz              | Nominal          | @100Hz             | Nominal        |
|-------------------|-------------------|------------------|--------------------|------------------|--------------------|----------------|
| Input Mon 2 (D21) | -0.3dB<br>173deg  | -0.1dB<br>173deg | -4.4dB<br>128.4deg | -4.1dB<br>129deg | -22.3dB<br>94.5deg | -22dB<br>95deg |
| Sum Mon (D22)     | -0.38dB<br>173deg | -0.1dB<br>173deg | -4.5dB<br>128.3deg | -4.1dB<br>129deg | -22.4dB<br>94.6deg | -22dB<br>95deg |

Return all summing node tester switches to the default position.

**12) Adjustment Channel Filtering** (SR785AdjustmentTFs.bat) \*\*NOT Applicable, unless input is connected.

Type SR785AdjustmentTFs

Test the transfer functions at 10kHz to 1Hz on the indicated adjustment channels on the tester to Sum Out. Verify filtering of at least -60dB at 100Hz and Record level below in the box below.

Right:

|         |  |
|---------|--|
| Default |  |
|---------|--|

Left:

|         |  |
|---------|--|
| Default |  |
|---------|--|

**13) Distortion** (SR785DistortionMeasurement.bat)

Type SR785DistortionMeasurement.

Inject a 1kHz/Vrms sine wave into IN1. Use a spectrum analyzer to measure the harmonic components at Sum Out. One the SR785, press Marker to display the THD level. Repeat the measurement for IN2 (Toggle D2, D3 down). Record the measurements in the boxes below.

Return toggle switches to default position.

|                                 | IN1 Left | IN1 Right | SUM Out | IN2 Left | IN2 Right | SUM Out |
|---------------------------------|----------|-----------|---------|----------|-----------|---------|
| Total Harmonic Distortion (THD) | -87dB    | -86.97dB  | <-70dB  | -86.96dB | -87.1dB   | <-70dB  |

**14) Noise Spectra** (SR785NoiseMeasurements.bat)

Type resetSR785 and Allow the SR785 to reset. Type SR785NoiseMeasurements

Terminate IN1 and IN2 using 50 Ohm terminations. Measure the noise density at each SUM Out. Record the values at 100Hz, 1kHz, and 10kHz in the table below.

| Frequency | SUM Out Left | < [nV/√Hz] | SUM Out Right    | < [nV/√Hz] |
|-----------|--------------|------------|------------------|------------|
| 100Hz     | 30           | 40         | <del>28</del> 28 | 40         |
| 1kHz      | 27           | 30         | 24               | 30         |
| 10kHz     | 27           | 30         | <del>24</del> 25 | 30         |

**15) Basic Transfer Functions (SR785BasicTFs.bat)**

Type SR785BasicTFs

Sweep the frequency from 100kHz down to 1Hz with 100mV source amplitude and Measure the transfer function from IN1 to SUM Out, and from IN2 to SUM Out for each side. Record the values at 10Hz, 100Hz, 1kHz, and 10kHz in the table below.

\*\* Tolerances must be within 1dB and 5deg of nominal.

Right:

| SUM Out/IN1 | dB    | Nom   | deg | Nom    |
|-------------|-------|-------|-----|--------|
| 1Hz         | -0.45 | 0.0dB | 180 | 180deg |
| 10Hz        | -0.46 | 0.0dB | 180 | 180deg |
| 100Hz       | -0.48 | 0.0dB | 180 | 180deg |
| 1kHz        | -0.43 | 0.0dB | 180 | 180deg |
| 10kHz       | -0.42 | 0.0dB | 179 | 175deg |

Toggle D2, D3 down

Ensure Sign "--" for IN2 (swapped sign relative to IN1)

| SUM Out/IN2 | dB   | Nom   | deg  | Nom    |
|-------------|------|-------|------|--------|
| 1Hz         | -0.3 | 0.0dB | -180 | 180deg |
| 10Hz        | -0.3 | 0.0dB | -180 | 180deg |
| 100Hz       | -0.3 | 0.0dB | -180 | 180deg |
| 1kHz        | -0.3 | 0.0dB | -180 | 180deg |
| 10kHz       | -0.3 | 0.0dB | -180 | 175deg |

Return toggles switches to default positions



Left:

| SUM Out/IN1 | dB   | Nom   | deg  | Nom    |
|-------------|------|-------|------|--------|
| 1Hz         | -0.4 | 0.0dB | -180 | 180deg |
| 10Hz        | -0.4 | 0.0dB | -180 | 180deg |
| 100Hz       | -0.5 | 0.0dB | -180 | 180deg |
| 1kHz        | -0.4 | 0.0dB | -180 | 180deg |
| 10kHz       | -0.4 | 0.0dB | -180 | 175deg |

Toggle D2, D3 down

Ensure Sign "-" for IN2 (swapped sign relative to IN1)

| SUM Out/IN2 | dB   | Nom   | deg  | Nom    |
|-------------|------|-------|------|--------|
| 1Hz         | -0.3 | 0.0dB | -180 | 180deg |
| 10Hz        | -0.3 | 0.0dB | -180 | 180deg |
| 100Hz       | -0.3 | 0.0dB | -180 | 180deg |
| 1kHz        | -0.3 | 0.0dB | -180 | 180deg |
| 10kHz       | -0.3 | 0.0dB | -180 | 175deg |

Return toggles switches to default positions.

### 16) Transfer Functions of Boost Gain Stages (SR785BoostGainTFs.bat)

Type SR785BoostGainTFs

Note: 1. Switch D9 must be **Down** (low) for all measurements.  
 2. All other switches are in default unless prompted otherwise

\*\* Tolerances must be within 1dB and 5deg of nominal.

Right:

| Boost #            | @10Hz           | Nom             | @100Hz          | Nom             | @1kHz           | Nom             |
|--------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Common Comp. (D17) | -32dB<br>180deg | -32dB<br>180deg | -32dB<br>180deg | -32dB<br>180deg | -32dB<br>180deg | -32dB<br>180deg |

Left:

| Boost #            | @10Hz            | Nom             | @100Hz           | Nom             | @1kHz            | Nom             |
|--------------------|------------------|-----------------|------------------|-----------------|------------------|-----------------|
| Common Comp. (D17) | -32dB<br>180 deg | -32dB<br>180deg | -32dB<br>180 deg | -32dB<br>180deg | -32dB<br>180 deg | -32dB<br>180deg |

### 17) Transfer Functions of DAQ Channels (SR785DAQTFs.bat)

Type SR785DAQTFs

Measure the transfer function from SR785 CH1 A to Monitor jack (DAQ channels). Sweep the frequency from 10kHz down to 1Hz at 1mV source amplitude. Record the values at 1Hz and 10kHz in the table below.

\*\* Tolerances must be within 1dB and 5deg of nominal.

Note: If you only have one PCB, you will need a breakout board to attach to P2 (see D1200151 for pin breakdown). If you have two PCBs, attach right front panel P2, P3 to left front panel P4, P2.

Right:

| Frequency   | 1Hz          | Nominal      | 10kHz         | Nominal       |
|-------------|--------------|--------------|---------------|---------------|
| I1MON       | 5.6dB, 11deg | 5dB, 0deg    | 45.6dB, -2deg | 46dB, 0deg    |
| I2MON       | 5.7dB, 11deg | 5dB, 0deg    | 45.8dB, -3deg | 46dB, 0deg    |
| SMON w/ IN1 | N/A          | 5dB, -170deg | N/A           | 46dB, -180deg |
| SMON w/ IN2 | N/A          | 5dB, -170deg | N/A           | 46dB, -180deg |

Left:

| Frequency   | 1Hz          | Nominal      | 10kHz         | Nominal       |
|-------------|--------------|--------------|---------------|---------------|
| I1MON       | 5.6dB, 10deg | 5dB, 0deg    | 45.6dB, -2deg | 46dB, 0deg    |
| I2MON       | 5.7dB, 10deg | 5dB, 0deg    | 45.8dB, -2deg | 46dB, 0deg    |
| SMON w/ IN1 | 5.6dB, 11deg | 5dB, -170deg | 45.6dB, -3deg | 46dB, -180deg |
| SMON w/ IN2 | 5.7dB, 11deg | 5dB, -170deg | 45.8dB, -3deg | 46dB, -180deg |

**18) Transfer Functions Filters (SR78FilerTF.bat)**

Type SR785FilterTF

Measure the transfer function from EXC to SUM Out with the dewhitening filters enabled from 7mHz to 1kHz with a source amplitude of 1V.

Confirm pole/zero at 1Hz/10Hz.

Right:

|           |                                     |
|-----------|-------------------------------------|
| Check box | <input checked="" type="checkbox"/> |
|-----------|-------------------------------------|

Left:

|           |                                     |
|-----------|-------------------------------------|
| Check box | <input checked="" type="checkbox"/> |
|-----------|-------------------------------------|

Measure the transfer function from IN1 to SUM Out with each filter on (D24, D18) from 1Hz to 100kHz with a source amplitude of 1V. Ensure unity gain.

Right:

|                  | Measured (dB) | Nominal (dB) |           |
|------------------|---------------|--------------|-----------|
| IN1 Filter (D24) | ~ -400 m dB   | 0 dB         | Pass/Fail |
| Sum Filter (D18) | ~ -400 m dB   | 0 dB         | Pass/Fail |

Left:

|                  | Measured (dB) | Nominal (dB) |           |
|------------------|---------------|--------------|-----------|
| IN1 Filter (D24) | ~ -400 m dB   | 0 dB         | Pass/Fail |
| Sum Filter (D18) | ~ -400 m dB   | 0 dB         | Pass/Fail |

### Tests Part 3: 4395A Network/Spectrum Analyzer

Connect the 4395A in a similar fashion to the SR785, with a GPIB to Cat5 adapter.

#### **19) High Frequency Transfer Function (AG4395AHighFreqTF.bat)**

Type AG4395AHighFreqTF

Use a network analyzer to measure the transfer function from IN1/2 to Sum Out. Sweep the frequency from 10MHz down to 10kHz with -20dBm source. To remove cable delays first measure the transfer function against a BNC barrel and use as a reference. **Record** the displayed values at 100kHz, 300kHz and 1MHz in the table below. Nominal values are given.

\*\* Tolerances are within 1dB and 5deg of nominal.

*Right:*

| Frequency | SUM Out/IN1 [dB] | Nominal | SUM Out/IN1 [deg] | Nominal |
|-----------|------------------|---------|-------------------|---------|
| 100kHz    | -4.8             | 0dB     | 175               | 170deg  |
| 300kHz    | -4.9             | 0dB     | 165               | 150deg  |
| 1MHz      | -5.2             | 2dB     | 131               | 75deg   |

| Frequency | SUM Out/IN2 [dB] | Nominal | SUM Out/IN2 [deg] | Nominal |
|-----------|------------------|---------|-------------------|---------|
| 100kHz    | -4.7             | 0dB     | 176               | 170deg  |
| 300kHz    | -4.7             | 0dB     | 168               | 150deg  |
| 1MHz      | -5.0             | 2dB     | 142               | 75deg   |

*Left:*

| Frequency | SUM Out/IN1 [dB] | Nominal | SUM Out/IN1 [deg] | Nominal |
|-----------|------------------|---------|-------------------|---------|
| 100kHz    | -4.8             | 0dB     | 175               | 170deg  |
| 300kHz    | -4.8             | 0dB     | 165               | 150deg  |
| 1MHz      | -5.2             | 2dB     | 131               | 75deg   |

| Frequency | SUM Out/IN2 [dB] | Nominal | SUM Out/IN2 [deg] | Nominal |
|-----------|------------------|---------|-------------------|---------|
| 100kHz    | -4.65            | 0dB     | 175.9             | 170deg  |

|               |       |     |       |        |
|---------------|-------|-----|-------|--------|
| <b>300kHz</b> | -4.72 | 0dB | 108.4 | 150deg |
| <b>1MHz</b>   | -4.99 | 2dB | 142.5 | 75deg  |