


NOTE:

⊕ ITEM NO. 2 TO BE CLEANLY PRESS FIT INTO ITEM NO. 1 AND ITEM NO. 4 BY LIGO AFTER ALL ITEMS ARE CLEANED AND BAKED.

REV.	DATE	DCN #	DRAWING TREE #
v1	-	INTERNAL REV	-
v2	09 JUL 2010	E0900501	E0900353
-	-	-	-

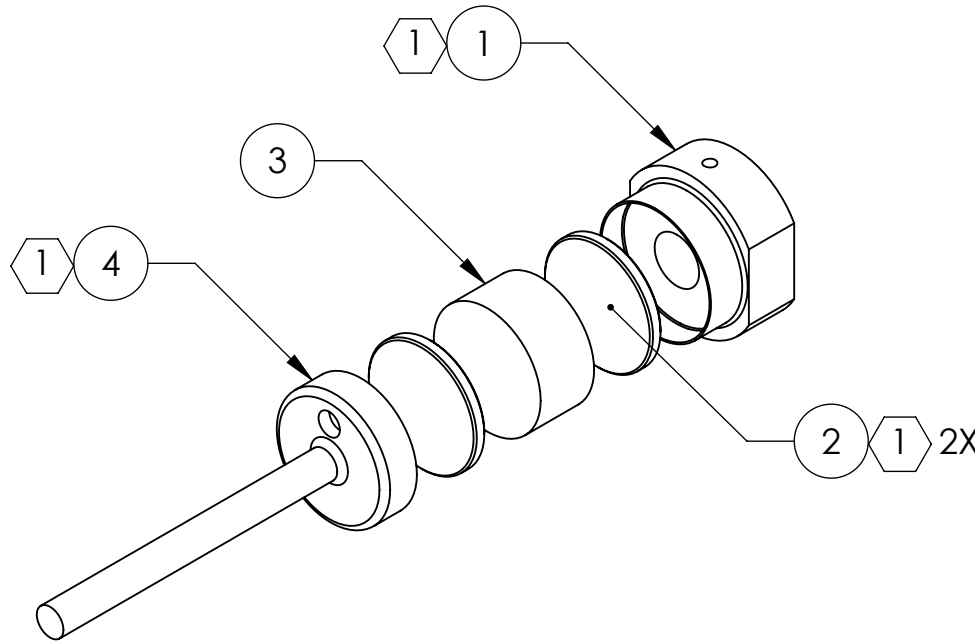

4	D0902491	MAGNET FLAG, HSTS UPPER MASS	6061-T6 Al	1	-	1
3	DCNI 00626/N	SINTERED NdFeB MAGNET, Ni-PLATED, 10 mm X 5 mm (MMG MAGDEV P/N OR EQUIVALENT)	NEO35	1	-	1
2	D1001534	MAGNETIC PLUG	416 SSSL	2	1	3
1	D0902494	MAGNET HOLDER (SHORT), UPPER MASS	6061-T6 Al	1	-	1
ITEM NO.	PART NUMBER	DESCRIPTION	MATERIAL	REQ	SPARE	TOTAL

PARTS LIST

CALIFORNIA INSTITUTE OF TECHNOLOGY MASSACHUSETTS INSTITUTE OF TECHNOLOGY		PART NAME				MAGNET/FLAG ASSY (SHORT), UPPER MASS			
SYSTEM	ADVANCED LIGO	SUB-SYSTEM	SUS	DESIGNER	M. MEYER	26 OCT 2009	SIZE	DWG. NO.	REV.
				DRAFTER	B. MOORE	17 NOV 2009	A	D0902492	v2
NEXT ASSY	MULTIPLE ASSY			CHECKER	M. MEYER	25 NOV 2009	SCALE: 2:1	PROJECTION:	SHEET 1 OF 1
				APPROVAL					