


REV.	DATE	DCN #	DRAWING TREE #
v1	22 OCT 2009	E0900369	-
-	-	-	-
-	-	-	-

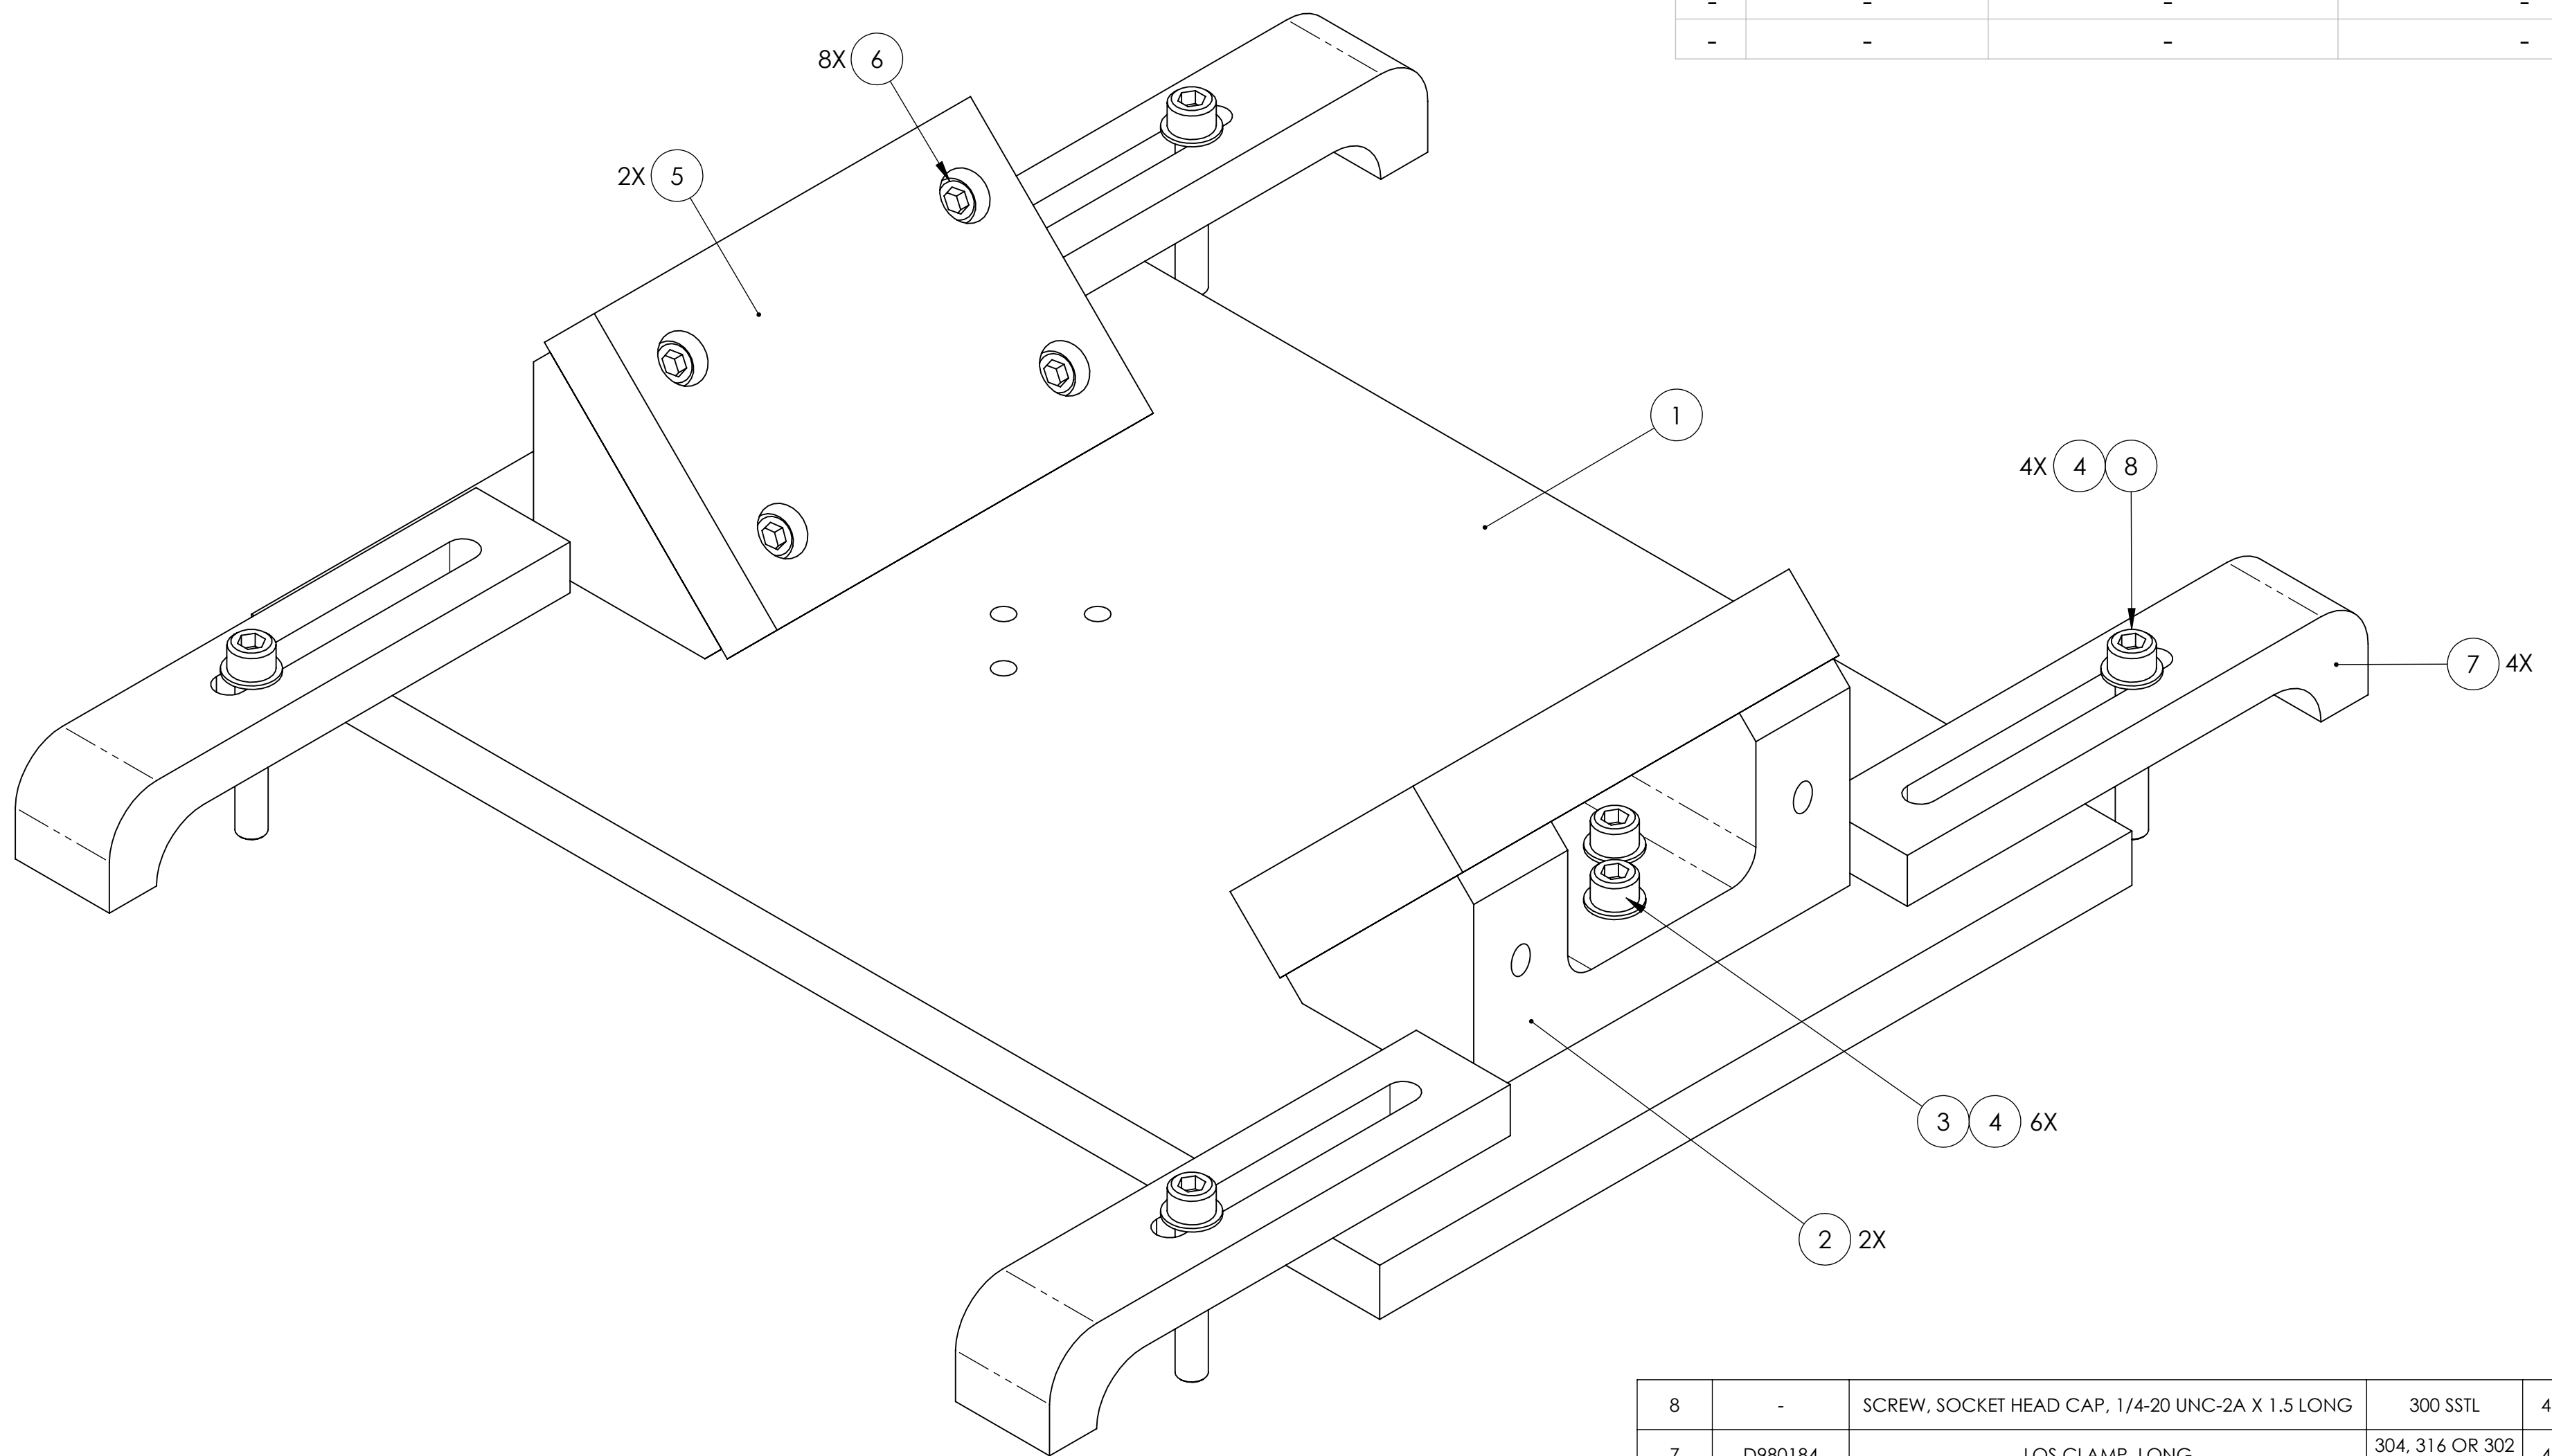

ITEM NO.	PART NUMBER	DESCRIPTION	MATERIAL	REQ	SPARE	TOTAL
8	-	SCREW, SOCKET HEAD CAP, 1/4-20 UNC-2A X 1.5 LONG	300 SSSL	4	1	5
7	D980184	LOS CLAMP, LONG	304, 316 OR 302 SSSL	4	0	4
6	-	SCREW, SOCKET HEAD CAP, 1/4-20 UNC-2A X 0.75 LONG	300 SSSL	8	2	10
5	D0902585	OPTIC REST PLATE	PFA440 HP (PRESHRUNK)	2	0	2
4	-	WASHER, FLAT, 1/4 (NAS 620-C416L OR EQUIVALENT)	300 SSSL	10	3	13
3	-	SCREW, SOCKET HEAD CAP, 1/4-20 UNC-2A X 1 LONG	300 SSSL	6	2	8
2	D0902461	OPTIC REST WEDGE	6061-T6 AI	2	0	2
1	D0902460	BASE PLATE	6061-T6 AI	1	0	1
PARTS LIST						

NOTES AND TOLERANCES: (UNLESS OTHERWISE SPECIFIED)

LIGO CALIFORNIA INSTITUTE OF TECHNOLOGY
 MASSACHUSETTS INSTITUTE OF TECHNOLOGY

SYSTEM: **ADVANCED LIGO** SUB-SYSTEM: **SUS**

NEXT ASSY: **MULTIPLE ASSYS**

PART NAME: **OPTIC HOLDER, HAM TRIPLE SUS.**

DESIGNER: D. BRIDGES	24 OCT 2009	SIZE: C	DWG. NO. D0902658	REV. v1
DRAFTER: D. BRIDGES	11 NOV 2009			
CHECKER: J. ROMIE	12 NOV 2009			
APPROVAL:		SCALE: 1:1	PROJECTION:	SHEET 1 OF 1

MATERIAL: N/A	FINISH: N/A μinch
----------------------	--------------------------