


PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ACCU-GLASS PRODUCTS INC. ANY REPRODUCTION IN PART OR AS WHOLE WITHOUT THE WRITTEN PERMISSION OF ACCU-GLASS PRODUCTS INC. IS **PROHIBITED.**

Rev	Description	Date	Approved
	SEE SHEET 1		

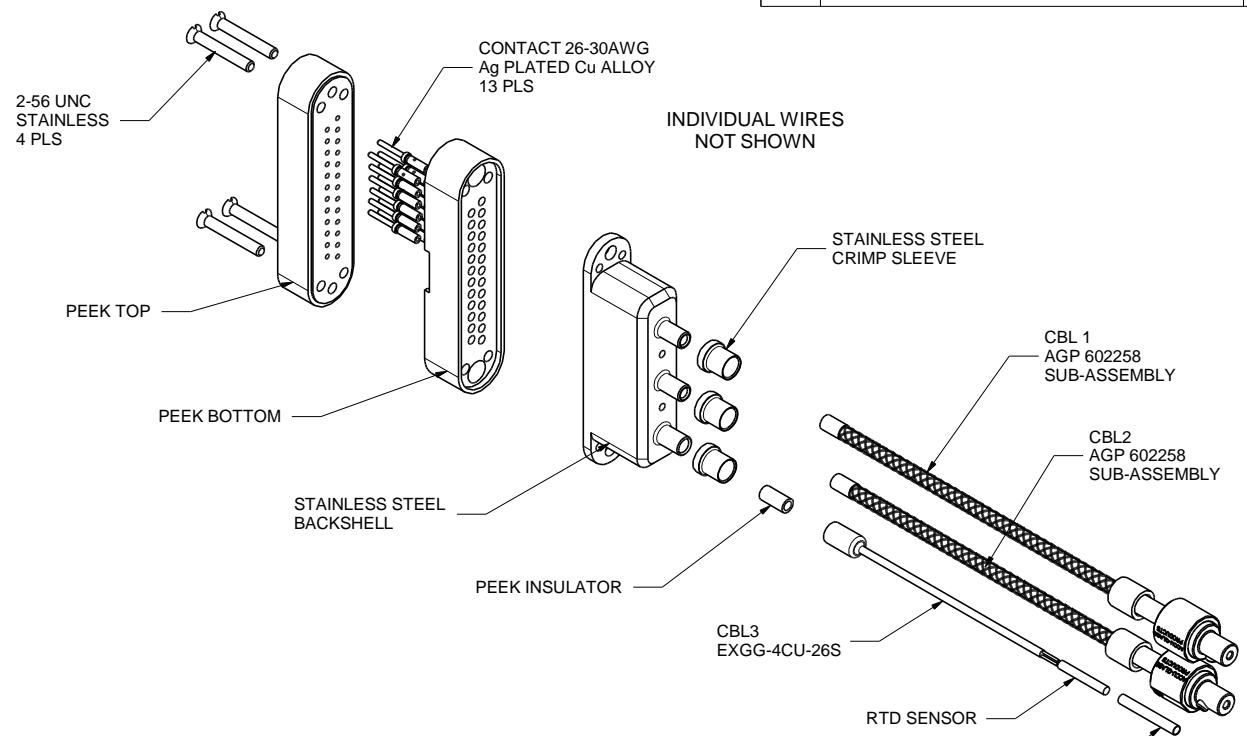

PIN OUT

CONNECTOR	CONNECTOR	CONNECTOR	RTD	DESCRIPTION
-J4-	-J5-	-J6-	SENSOR	
PIN 1 & SHELL	SHIELD & HSG			CBL1 Ag PLATED Cu SHIELD
PIN 2	WIRE 1 PAIR 1			CBL1-28AWG KAPTON TWISTED PAIR 1
PIN 3	WIRE 2 PAIR 1			CBL1-28AWG KAPTON TWISTED PAIR 1
PIN 4	WIRE 1 PAIR 2			CBL1-28AWG KAPTON TWISTED PAIR 2
PIN 5	WIRE 2 PAIR 2			CBL1-28AWG KAPTON TWISTED PAIR 2
(PIN 1) SHELL		SHIELD & HSG		CBL2 Ag PLATED Cu SHIELD
PIN 14		WIRE 1 PAIR 1		CBL2-28AWG KAPTON TWISTED PAIR 1
PIN 15		WIRE 2 PAIR 1		CBL2-28AWG KAPTON TWISTED PAIR 1
PIN 16		WIRE 1 PAIR 2		CBL2-28AWG KAPTON TWISTED PAIR 2
PIN 17		WIRE 2 PAIR 2		CBL2-28AWG KAPTON TWISTED PAIR 2
PIN 6			PAIR 1 RED	CBL3-EXGG-4CU-26S PAIR 1
PIN 7			PAIR 2 RED	CBL3-EXGG-4CU-26S PAIR 2
PIN 18			PAIR 1 BLACK	CBL3-EXGG-4CU-26S PAIR 1
PIN 19			PAIR 2 BLACK	CBL3-EXGG-4CU-26S PAIR 2

-Ag PLATED Cu BRAID MUST BE ELECTRICALLY CONDUCTIVE TO PIN 1, BACKSHELL AND USER-END HOUSING

-Ag PLATED Cu BRAID MUST BE ELECTRICALLY CONDUCTIVE TO PIN 1, BACKSHELL AND USER-END HOUSING

WIRES MUST BE THREADED THROUGH PEEK BOTTOM PEICE THEN CRIMPED TO CONTACT



Accu-Glass Products Inc.
 700 Arroyo Ave.
 San Fernando, CA 91340
 TEL 818-365-4215
 FAX 818-365-7074
 accuglassproducts.com

Notes:
 1. DIMINSIONS SYMMETRICAL ABOUT CENTERLINES

UNCONTROLLED WEB COPY

Material ASSEMBLY	
Tolerances unless otherwise specified.	
.X ± .03	Angular: +/- .5°
.XX ± .01	Finish: Min. 63 Ra
.XXX ± .005	

Title: **25D PEEK MALE LIGO STYLE**
 D1001519-V6 CUSTOM CABLE ASSY

Drawn By Date	CR 113010	DWG. NO. 6-100001	Rev. C
Approved			Sheet 2 OF 2