
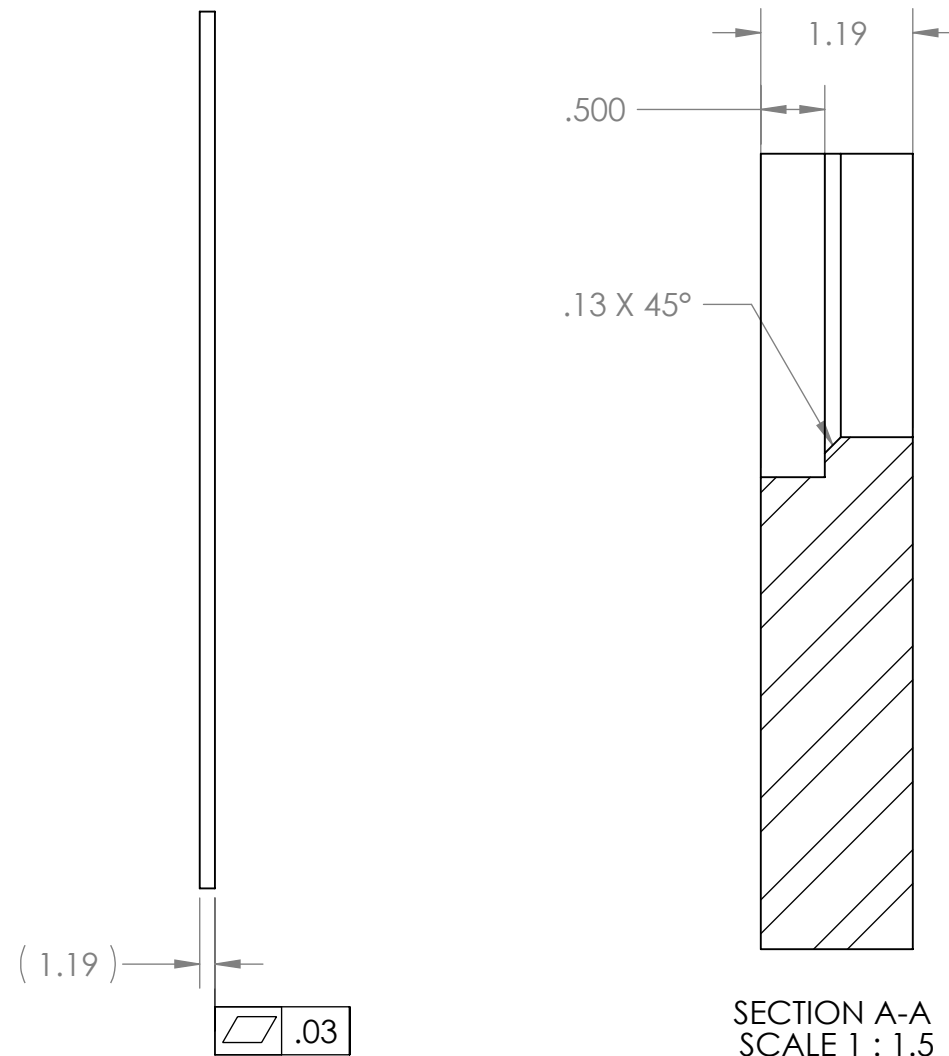


PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS
 DRAWING IS THE SOLE PROPERTY OF
 GNB CORPORATION. ANY
 REPRODUCTION IN PART OR AS A WHOLE
 WITHOUT THE WRITTEN PERMISSION OF
 GNB CORPORATION IS PROHIBITED.

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	RELEASED TO PRODUCTION	8/23/2010	MKM2

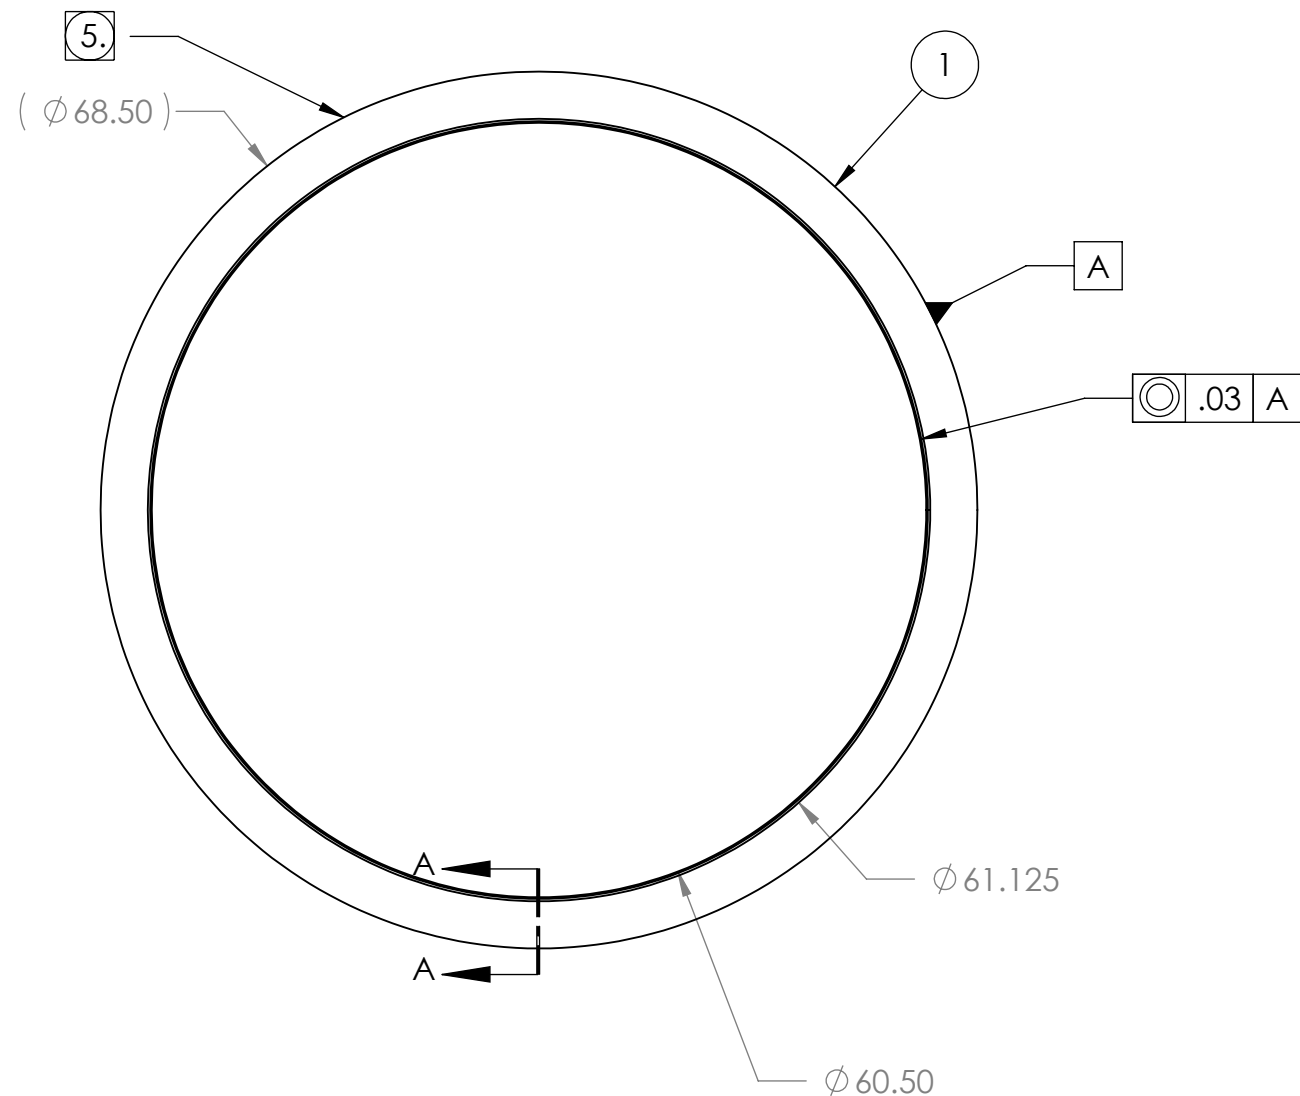

- NOTES:
- THE FOLLOWING ARE NOT ALLOWED: GRINDING, HONING, LAPPING, POLISHING, BUFFING, SANDING, BLASTING.
 - NO HYDROCARBONS ALLOWED IN THE COOLANT. COOLANT LIMITS AS FOLLOWS
 - WATER LEACHABLE CHLORIDES: 100PPM
 - TOTAL HALOGENS (INCLUDING CHLORIDES): 1000PPM
 - TOTAL SULFUR: 1000PPM
 - DO NOT ALLOW PART TO BE CONTAMINATED BY CARBON STEEL OR IRON CONTACT.
 - MACHINING TO BE IN LINE WITH LIGO SPECIFICATION E0900406, LATEST REVISION.

5. DO NOT MACHINE OD, ALL FORGING MANUFACTURER'S NUMBERS TO BE LEFT INTACT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	114324-00S	FORGING, FLANGE, 60 ID X 68.50 OD	1

MATERIAL: AISI 304L PER ASME SA-182 GRADE F; MAX SULFUR CONTENT .006%

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN INCHES
 TOLERANCES:
 ANGULAR: ± 0°30'
 .XX ± .01
 .XXX ± .005
 UNSPECIFIED FILLETS: R.015
 BREAK EDGES .010x45°
 REMOVE ALL BURRS

FINISH 125
 //, □, ⊥ WITHIN .03

THIRD ANGLE PROJECTION



WEIGHT: 269.12#	
APPROVALS	DATE
DRAFTER MKM2	6/28/10
CHECKER RW	7/9/10
ENGINEER MKM2	6/28/10

GNB CORPORATION
 SCIENTIFIC AND INDUSTRIAL EQUIPMENT
 3200 DWIGHT RD. SUITE 100
 ELK GROVE, CA, 95758
 916-395-3003 FAX: 916-395-3363
 www.gnbvalves.com

TITLE: FLANGE, SMALL, ADAPTER A-18

DO NOT SCALE DRAWING	B DWG. NO. 114323-00S	REV A
SCALE: 1:15	SHEET 1 OF 1	