


D1002364_ALIGO_AOS_D0900623_Faraday Isolator Beam Dump Assy, PART PDM REV: X-010, DRAWING PDM REV: X-003

REV.	DATE	DCN #	DRAWING TREE #
v1	07 OCT 2010	E1000563	

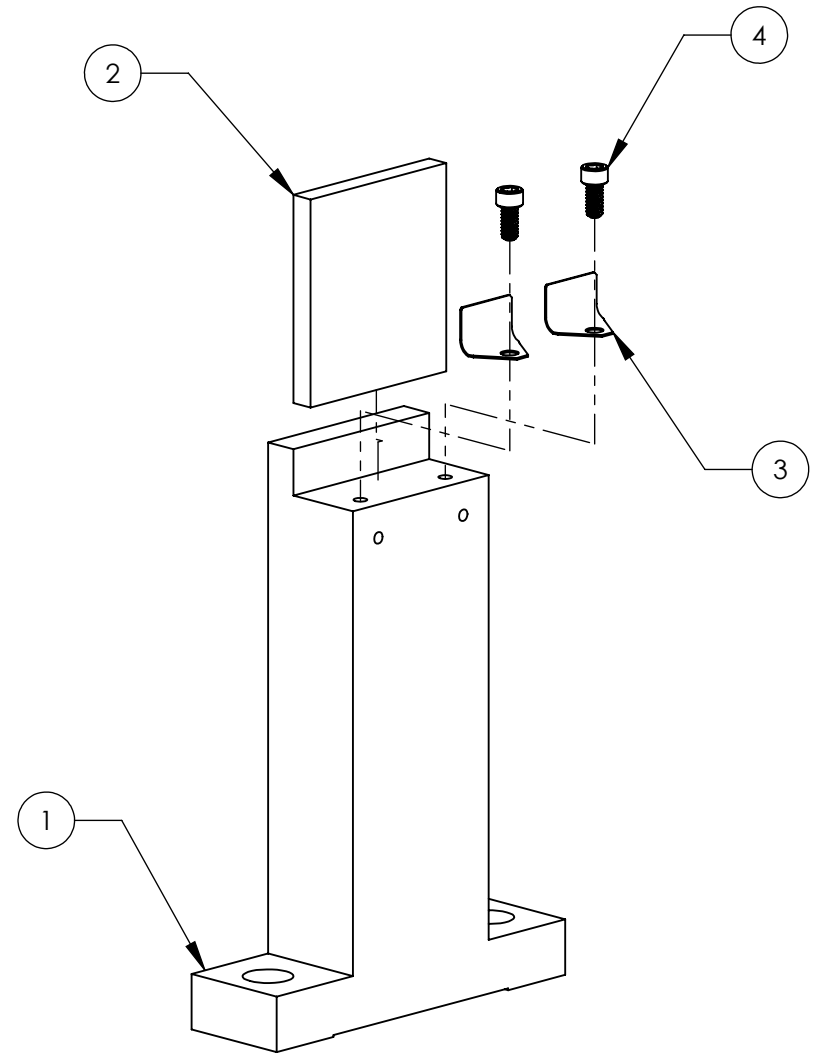

ITEM NO.	PART NUMBER	DESCRIPTION	MATERIAL	REQ	SPARE	TOTAL
4	92200A076	Head Cap Screw 300 Series SS, 2-56 Thrd, 3/16" Length, MS 16995-1	300 SSSL	2		2
3	D0900619	SPRING CLIP	304 SSSL	2		2
2	D1002363	FARADAY ISOLATOR BEAM DUMP	BLACK GLASS	1		1
1	D1002362	FARADAY ISOLATOR BEAM DUMP MOUNT	6061-T6 Al	1		1

PARTS LIST

<p>NOTES AND TOLERANCES: (UNLESS OTHERWISE SPECIFIED)</p> <p>1. INTERPRET DRAWING PER ASME Y14.5-1994. 2. REMOVE ALL SHARP EDGES, R.02 MIN. 3. DO NOT SCALE FROM DRAWING. 4. ALL MACHINING FLUIDS MUST BE FULLY SYNTHETIC, FULLY WATER SOLUBLE AND FREE OF SULFUR, SILICONE, AND CHLORINE.</p>		<p>LIGO CALIFORNIA INSTITUTE OF TECHNOLOGY MASSACHUSETTS INSTITUTE OF TECHNOLOGY</p>		<p>PART NAME FARADAY ISOLATOR BEAM DUMP ASSY</p>	
<p>DIMENSIONS ARE IN</p> <p>TOLERANCES: .XX ± .XXX ±</p> <p>ANGULAR ± °</p>	<p>MATERIAL N/A</p>	<p>FINISH N/A μinch</p>	<p>NEXT ASSY D0900623</p>	<p>DESIGNER MRUIZ</p>	<p>DATE 09 AUG 2010</p>
<p>SCALE: 1:1 PROJECTION: </p>				<p>SIZE DWG. NO. B D1002364</p>	<p>REV. v1</p>
<p>SHEET 1 OF 1</p>					

8 7 6 5 4 3 2 1

D
C
B
A

D
C
B
A

8 7 6 5 4 3 2 1