
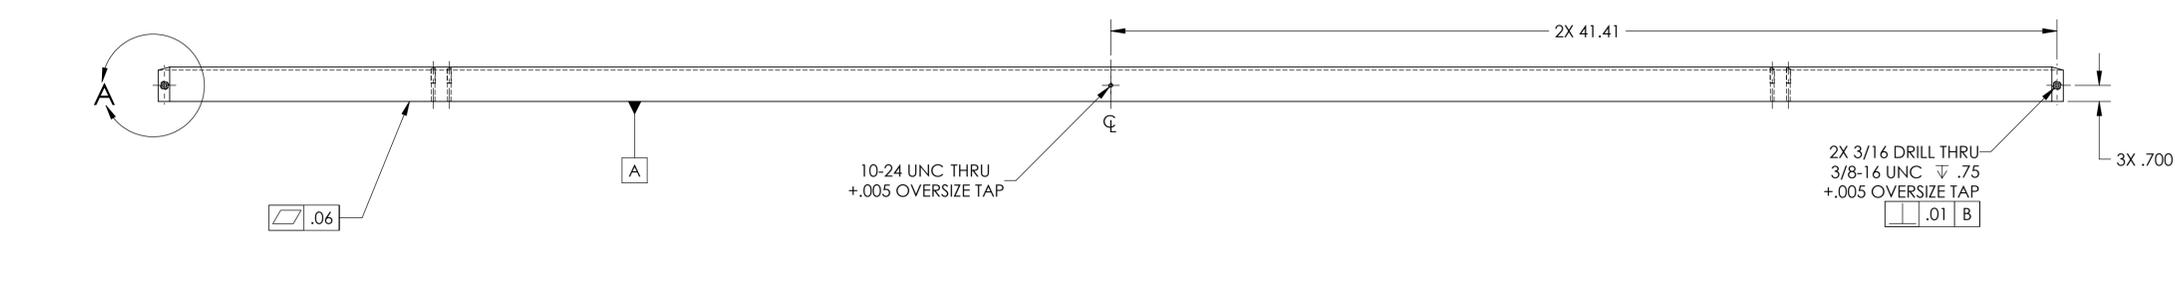
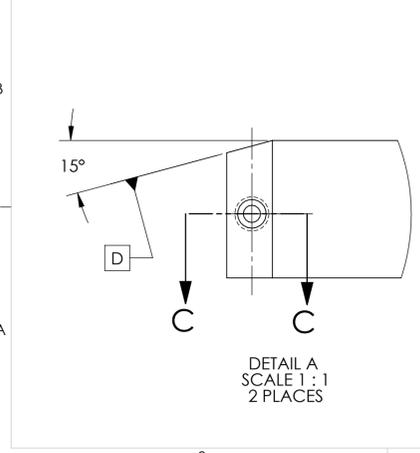


D:\000777\_d\UGO\_Modes\Clearens\_Tube\_Baffle\_Ring\_Top\_PART.PDM.REV.X.021.DRAWING.PDM.REV.X.026

REV.	DATE	DCN #	DRAWING TREE #
v1	19 MAY 2011	E1000822-v1	-
v2	19 JUL 2011	-	-
-	-	-	-

**NOTES: UNLESS OTHERWISE SPECIFIED**

- INTERPRET DRAWING PER ASME Y14.5-1994.
- REMOVE ALL SHARP EDGES 0.005" TO 0.015".
- DO NOT SCALE FROM DRAWING.
- ALL MACHINING FLUIDS MUST BE FULLY SYNTHETIC, FULLY WATER SOLUBLE AND FREE OF SULFUR, SILICONE, AND CHLORINE. REFER TO LIGO E0900237 FOR LIST OF APPROVED COOLANTS.
- SCRIBE, ENGRAVE (A VIBRATORY TOOL MAY BE USED), LASER MARK OR MECHANICALLY STAMP (NO INKS OR DYES) DRAWING PART NUMBER, REVISION (AND VARIANT OR 'TYPE' IF APPLICABLE) ON NOTED SURFACE OF PART FOLLOWED ON THE NEXT LINE WITH A THREE DIGIT SERIAL NUMBER. SERIAL NUMBERS START AT 001 FOR THE FIRST ARTICLE AND PROCEED CONSECUTIVELY. USE MINIMUM 0.12" HIGH CHARACTERS. UNLESS THE SIZE OF THE PART DICTATES SMALLER CHARACTERS. EXAMPLE: DXXXXXX-VY, TYPE-XX, S/N XXX
- APPROXIMATE WEIGHT = 8.95 LB.
- ALL PARTS SHALL BE MANUFACTURED IN ACCORDANCE WITH LIGO SPECIFICATION E0900364.
- ALL MATERIAL IS TO BE VIRGIN MATERIAL (i.e. NO WELD REPAIRS, PLUGS OR RECYCLED MATERIAL). NO LIGO-REPAIRS SHALL BE MADE UNLESS APPROVED IN ADVANCE, AND IN WRITING, BY LIGO LABORATORY. REFER TO E0900364.
- ELECTRO POLISH TO REMOVE .0005 - .001 PER SIDE.

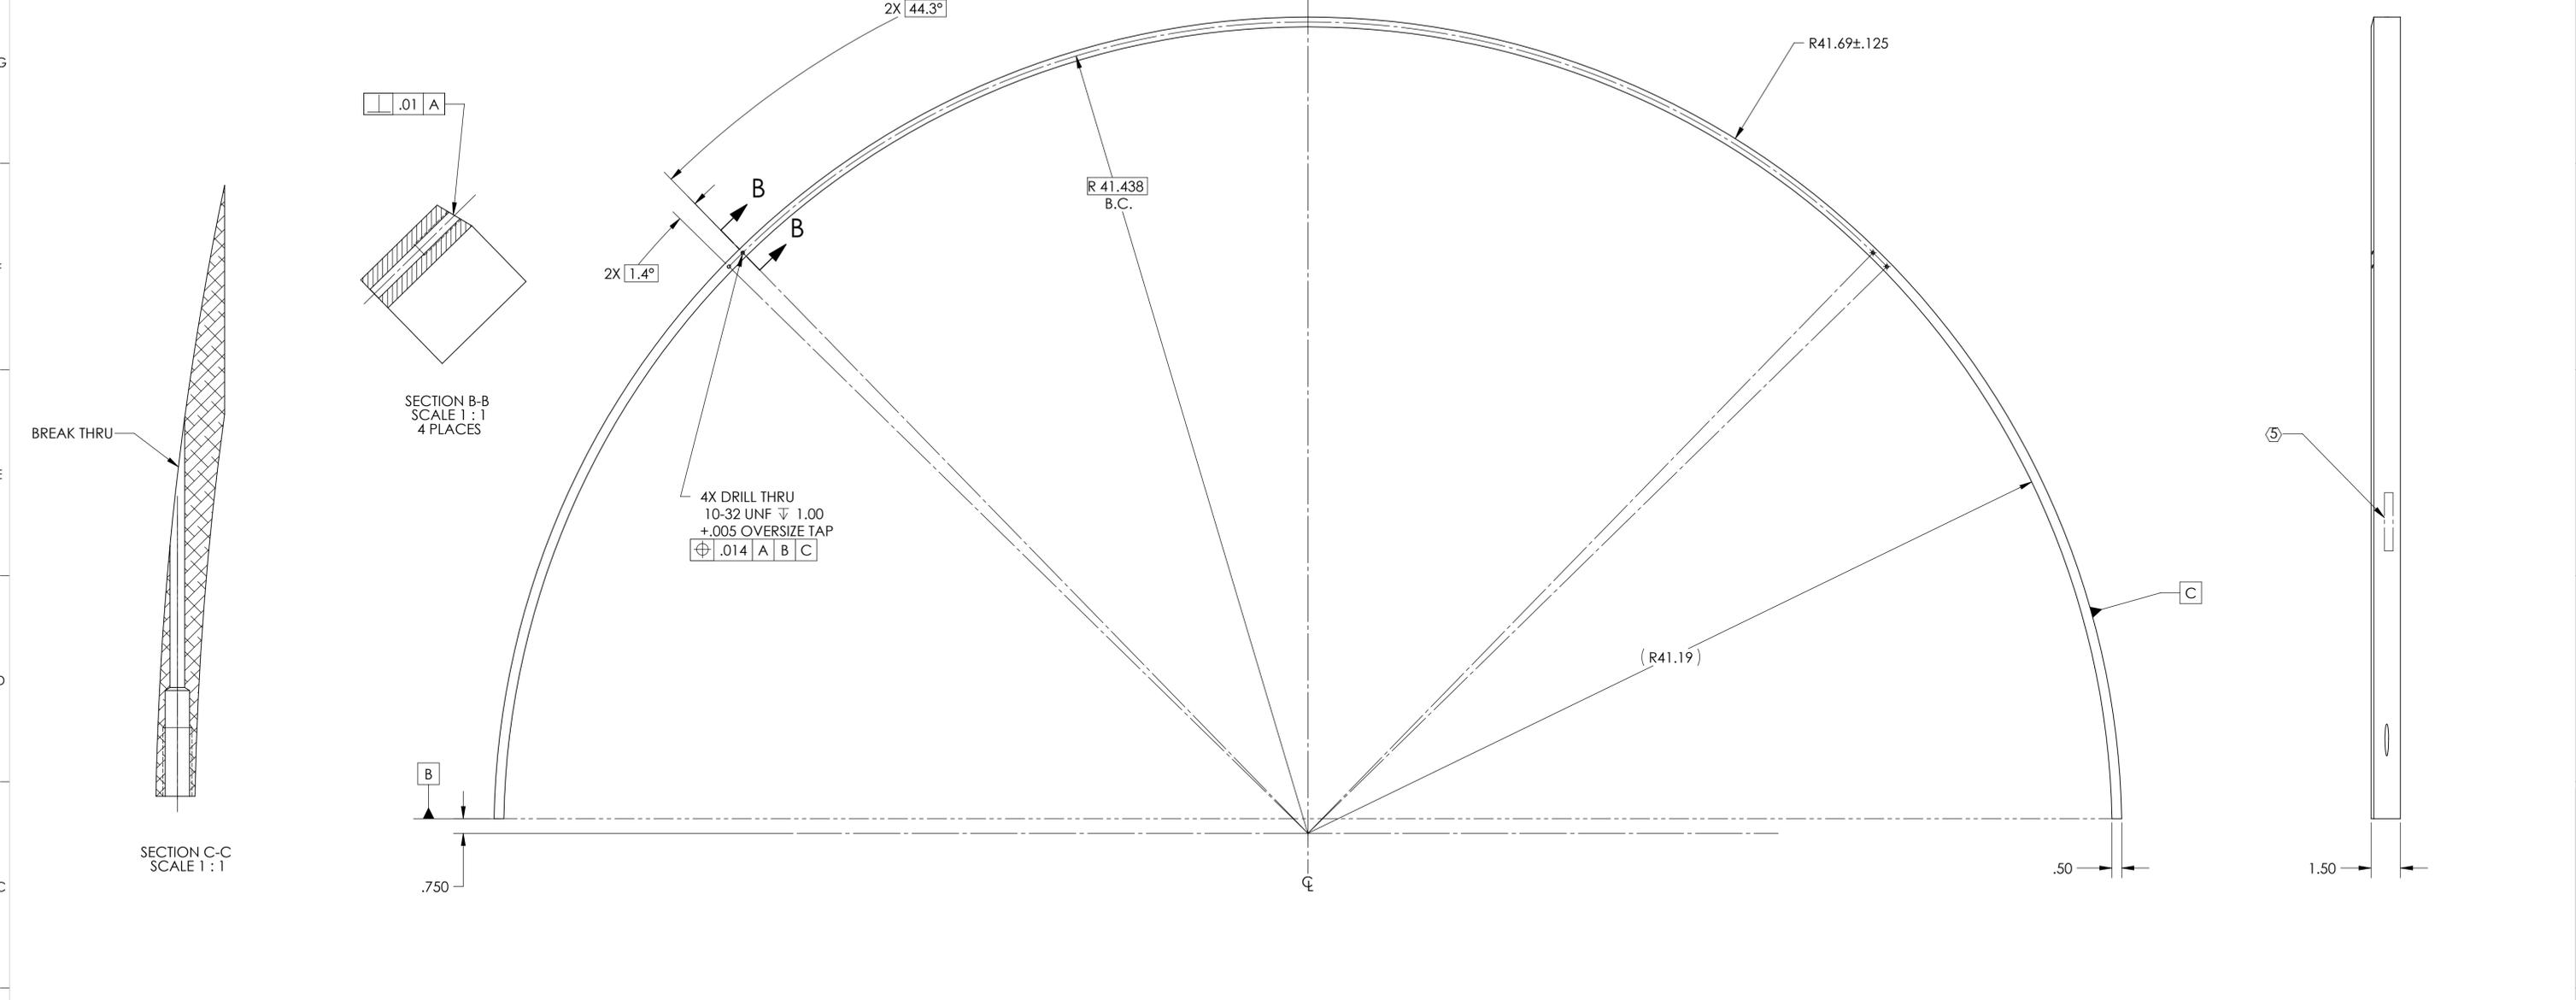

NOTES AND TOLERANCES: (UNLESS OTHERWISE SPECIFIED)				LIGO CALIFORNIA INSTITUTE OF TECHNOLOGY MASSACHUSETTS INSTITUTE OF TECHNOLOGY		PART NAME	
DIMENSIONS ARE IN INCHES				SYSTEM		TUBE BAFFLE RING_TOP	
TOLERANCES: .XX ± .03 .XXX ± .010				ADVANCED LIGO		DESIGNER H. KELMAN 29 APR 2008	
ANGULAR ± 0.5°				FINISH 63 μinch		DRAFTER TQ. NGUYEN 8 NOV 2010	
MATERIAL 6061-T6 Al				NEXT ASSY D1002863		CHECKER M. SMITH	
						APPROVAL D. COYNE	
						SIZE DWG. NO. D D1000777	
						REVISION v2	
						SCALE: 1:4 PROJECTION: SHEET 1 OF 1	