

NOTES: (UNLESS OTHERWISE SPECIFIED)

~~Liquid contaminants/Machining Lubricants~~
 Liquids containing hydrocarbons or other contaminants, other than the machining fluids specified herein, shall not be allowed to come into contact with suspension material at any time. All machining fluids shall be water soluble and free of sulfur, chlorine and silicone; such as Cincinnati Milacron's Cimtech 410 (stainless steel).

Identification_Serial Number


A serial number shall be etched, or scribed on the part see note drawing note.

Serial Number Format

The Serial number shall be of the format: D99xxxx-x-001

Example: D990021-A-001

The drawing number, The revision number, The sequential part number

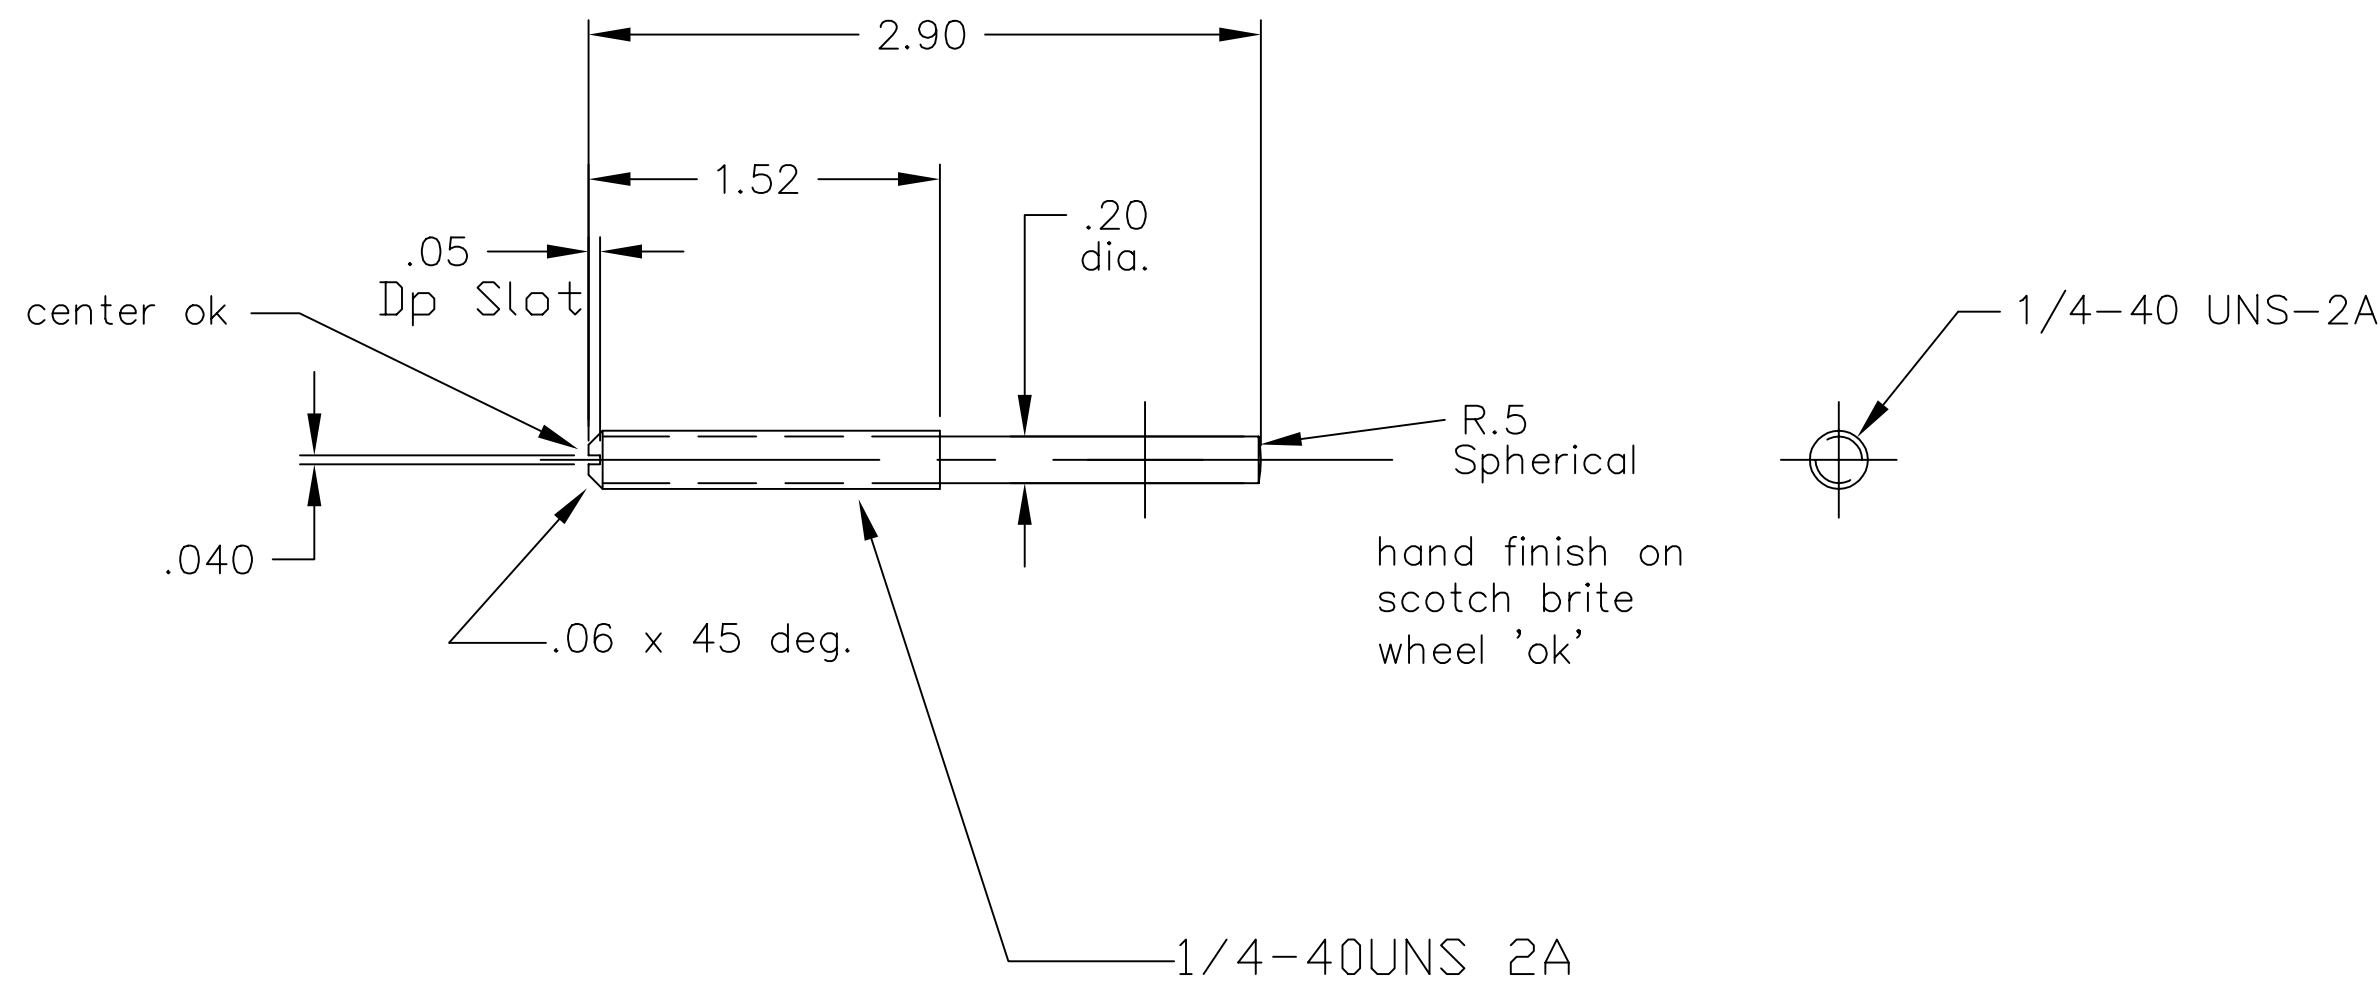

ref. make 2 per assembly

REF.	QTY.	PART or DRWG No.	NDMENCLATURE or DESCRIPTION	MATERIAL
PARTS and MATERIAL LIST				
LIGO CALIFORNIA INSTITUTE OF TECHNOLOGY MASSACHUSETTS INSTITUTE OF TECHNOLOGY				
THREADED ROD, SEC. MIRROR ADJ.				
		FOR FABRICATION		kenm 6-8-99
		PRE-RELEASE		00
		DESCRIPTION		CHAPUT 11-3-98
		DCN NUMBER		DATE
		APPR'D CHECK		DRWN
DWG. NO.		DESCRIPTION		CAD FILE
REFERENCE DRAWINGS		USED IN: XXX		D980578-B
		NEXT ASS'Y: XXX		SIZE DWG. NO.
				B D980578-B
				SHEET
				1 OF 1
				SCALE
				1 : 1