



From Trillium Flange

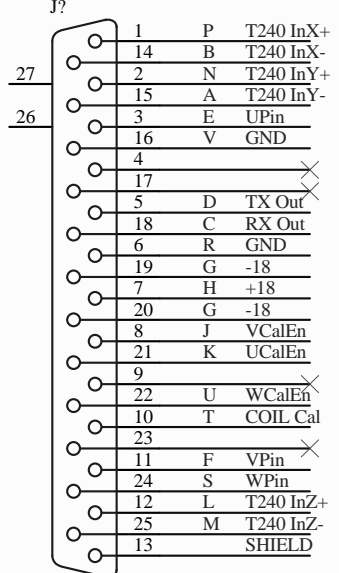

D Connector 25

Cable length=12 inches

From 25 pin flange

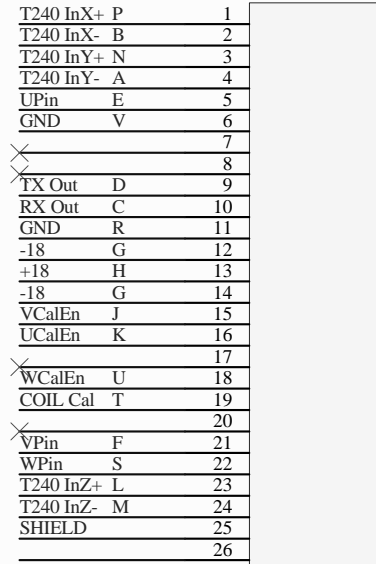

P2

D sub pins to 20 pin header

- 1 to 1
- 14 to 2
- 2 to 3
- 15 to 4
- 3 to 5
- 16 to 6
- 5 to 9
- 18 to 10
- 6 to 11
- 19 to 12
- 7 to 13
- 20 to 14
- 8 to 15
- 21 to 16
- 22 to 18
- 10 to 19
- 11 to 21
- 24 to 22
- 12 to 23
- 25 to 24

