



NOTES CONTINUED:

⑤ SCRIBE, ENGRAVE, OR MECHANICALLY STAMP (NO INKS OR DYES) DRAWING PART NUMBER AND REVISION ON NOTED SURFACE FOLLOWED ON THE NEXT LINE BY A THREE DIGIT SERIAL NUMBER. SERIAL NUMBERS START AT 001 FOR THE FIRST ARTICLE AND PROCEED CONSECUTIVELY. USE .07" HIGH CHARACTERS. EXAMPLE: DXXXXXX-VY, S/N 001. A VIBRATORY TOOL MAY BE USED.

REV.	DATE	DCN #	DRAWING TREE #

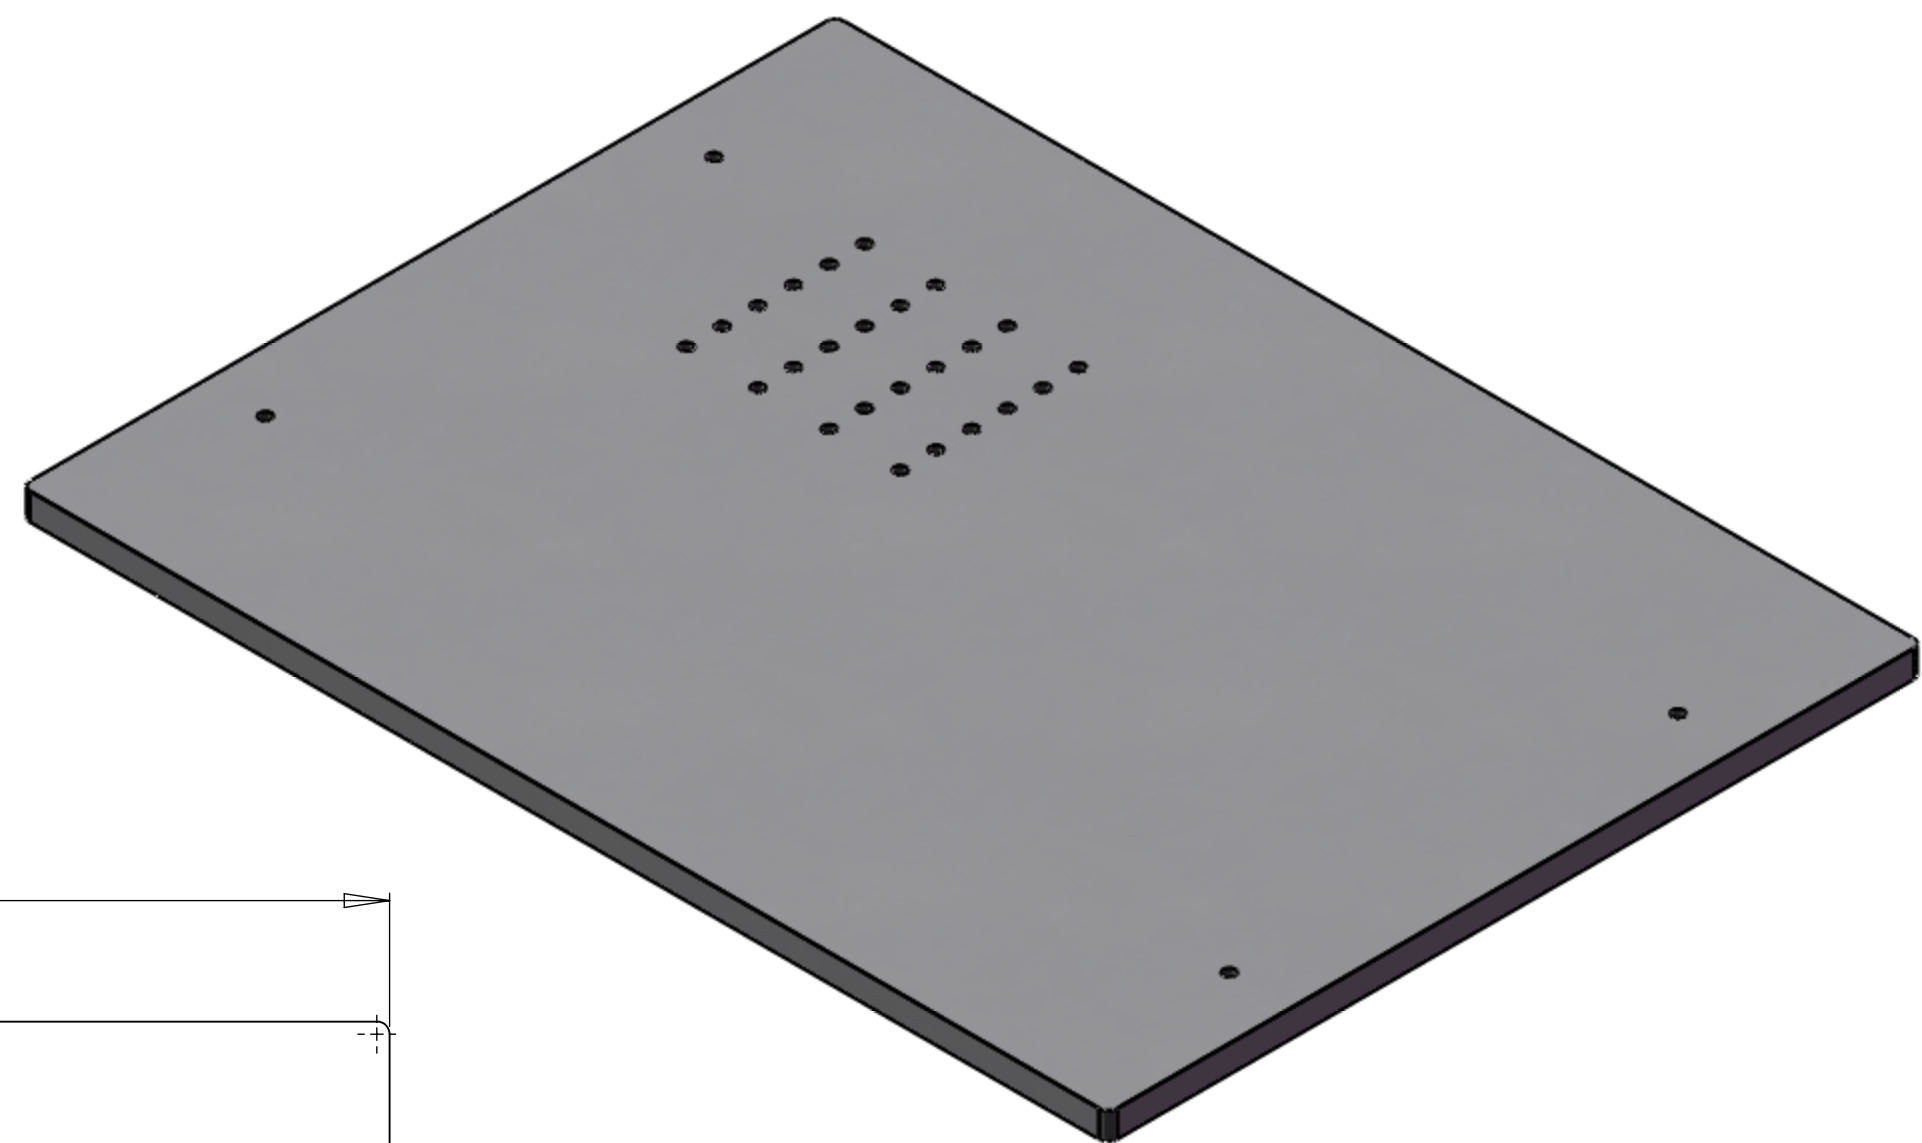

IMPORTANT:  
HOLE ARRAY NOT REQUIRED FOR PROOF TESTER  
ONLY FOR ATTACHMENT OF BOUNCE TESTER CENTRAL SUPPORT

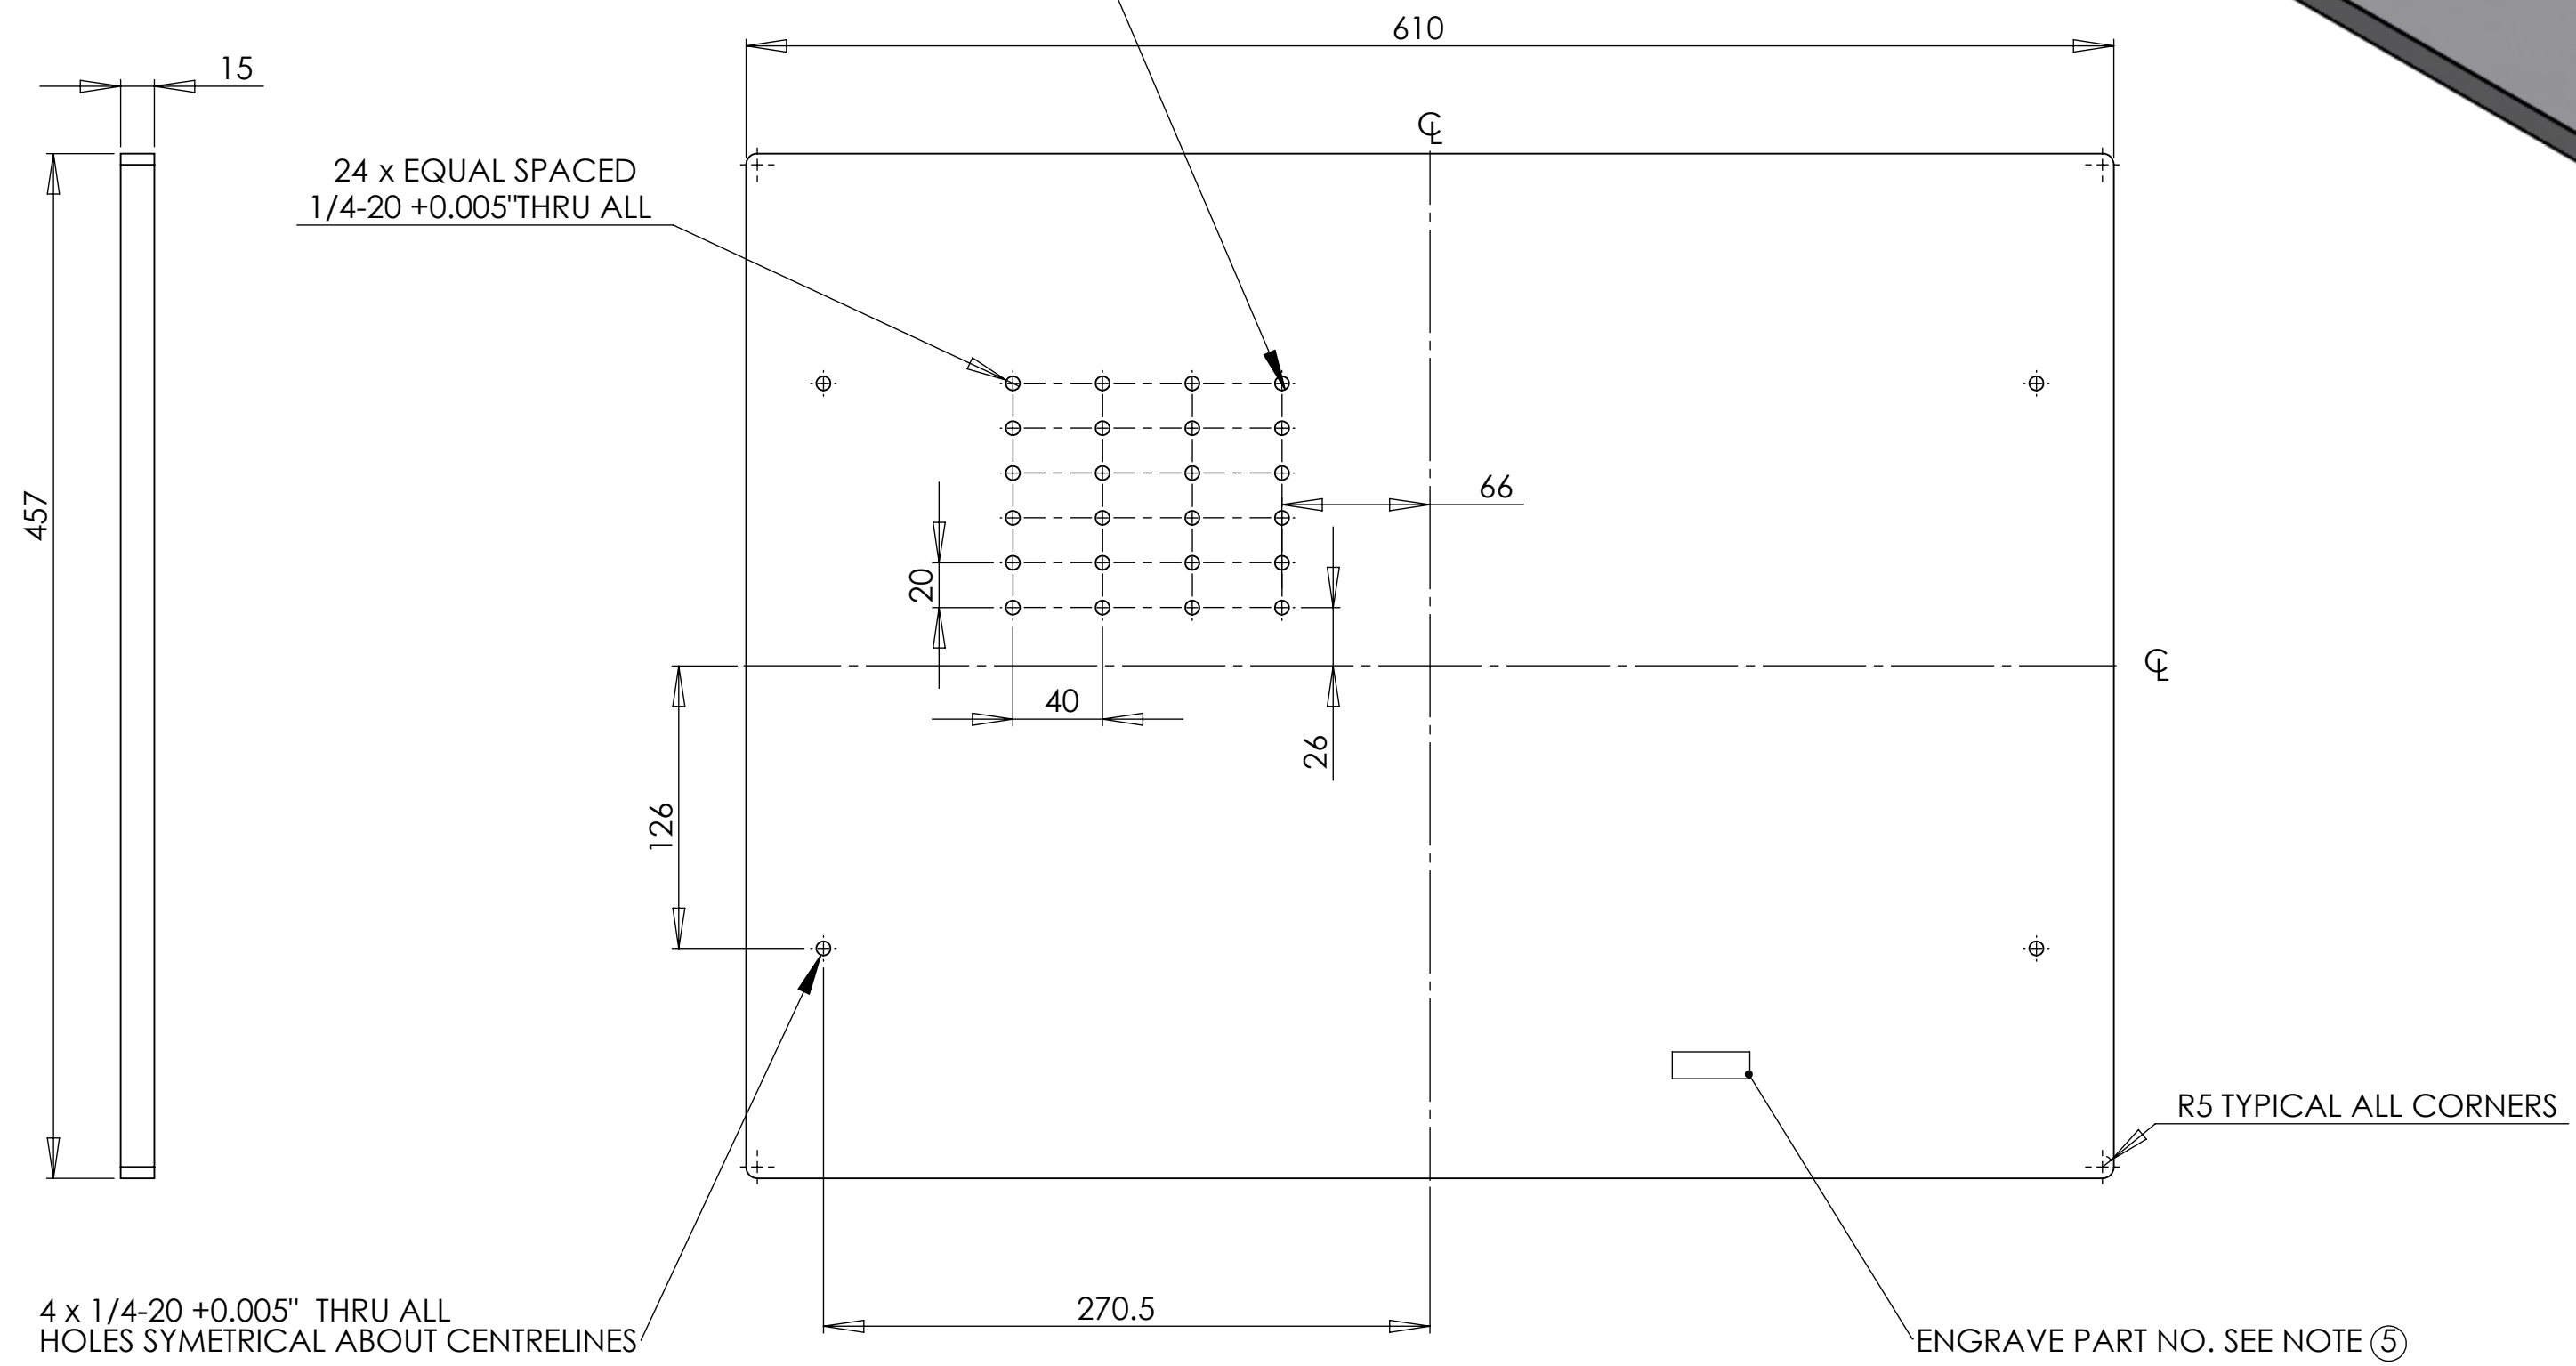

NOTES AND TOLERANCES: (UNLESS OTHERWISE SPECIFIED)

DIMENSIONS ARE IN MILLIMETERS  
TOLERANCES:  
.XX ± 0.10  
.XXX ± 0.010  
ANGULAR ± 0.2°

1. INTERPRET DRAWING PER ASME Y14.5-1994. 2. REMOVE ALL SHARP EDGES, R.02 MIN. 3. DO NOT SCALE FROM DRAWING. 4. ALL MACHINING FLUIDS MUST BE FULLY SYNTHETIC, FULLY WATER SOLUBLE AND FREE OF SULFUR, SILICONE, AND CHLORINE.	
MATERIAL	6061-T6 Al
FINISH	1.6 μm

**LIGO** CALIFORNIA INSTITUTE OF TECHNOLOGY  
MASSACHUSETTS INSTITUTE OF TECHNOLOGY

SYSTEM: **ADVANCED LIGO**      SUB-SYSTEM: **SUS**

NEXT ASSY

PART NAME		<b>PROOF BOUNCE TESTER BASEPLATE</b>		
DESIGNER	L.CUNNINGHAM	SIZE	DWG. NO.	REV.
DRAFTER	L.Cunningham	<b>c</b>	<b>D1002105</b>	<b>v2</b>
CHECKER		SCALE: 1:3	PROJECTION:	SHEET 1 OF 1
APPROVAL				