
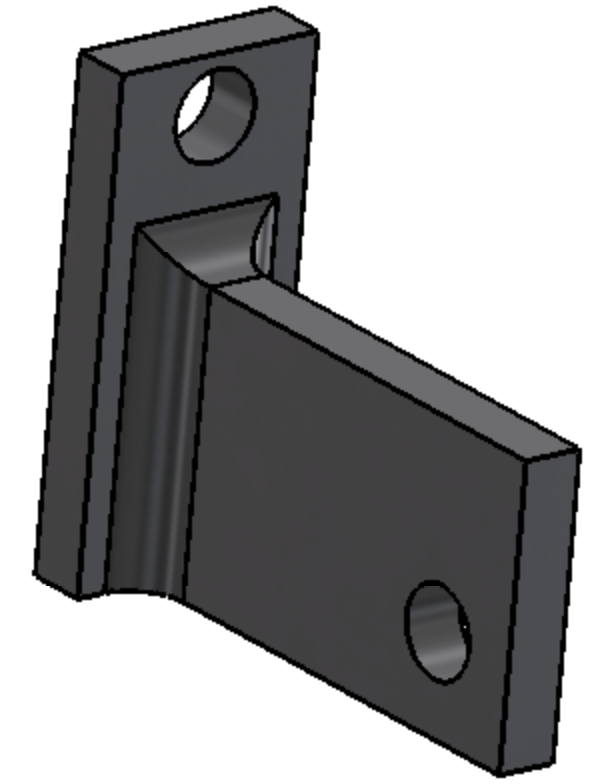


NOTES CONTINUED:



⑤ SCRIBE, ENGRAVE, OR MECHANICALLY STAMP (NO INKS OR DYES) DRAWING PART NUMBER AND REVISION ON NOTED SURFACE FOLLOWED ON THE NEXT LINE BY A THREE DIGIT SERIAL NUMBER. SERIAL NUMBERS START AT 001 FOR THE FIRST ARTICLE AND PROCEED CONSECUTIVELY. USE .07" HIGH CHARACTERS. EXAMPLE: DXXXXXXX-VY, S/N 001. A VIBRATORY TOOL MAY BE USED.

⑥ MACHINE ALL SURFACES.

REV.	DATE	DCN #	DRAWING TREE #

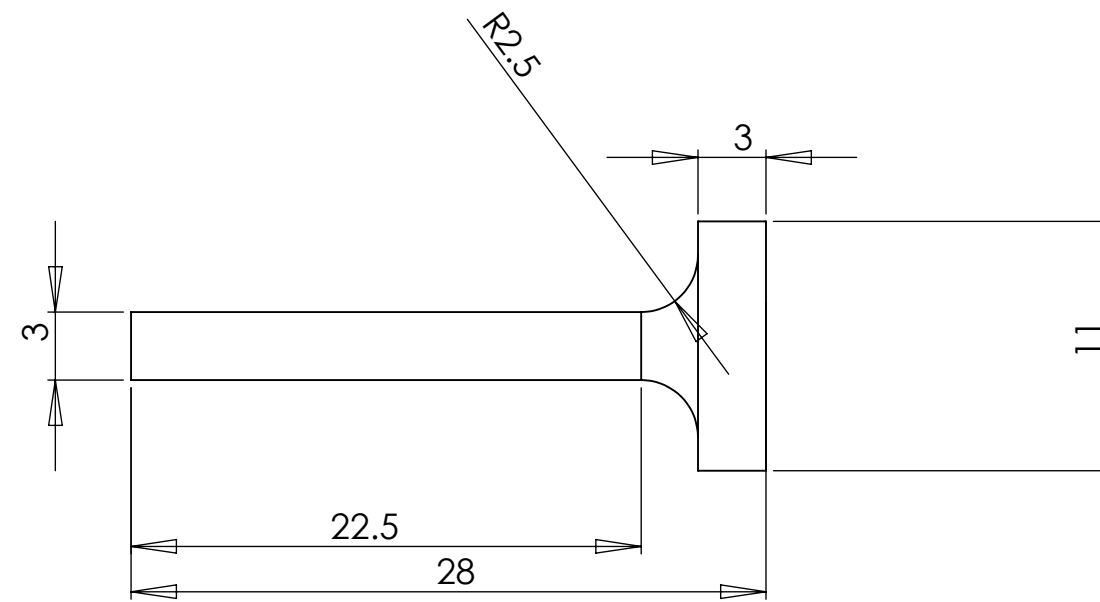

∅ 4.5 THRU ALL

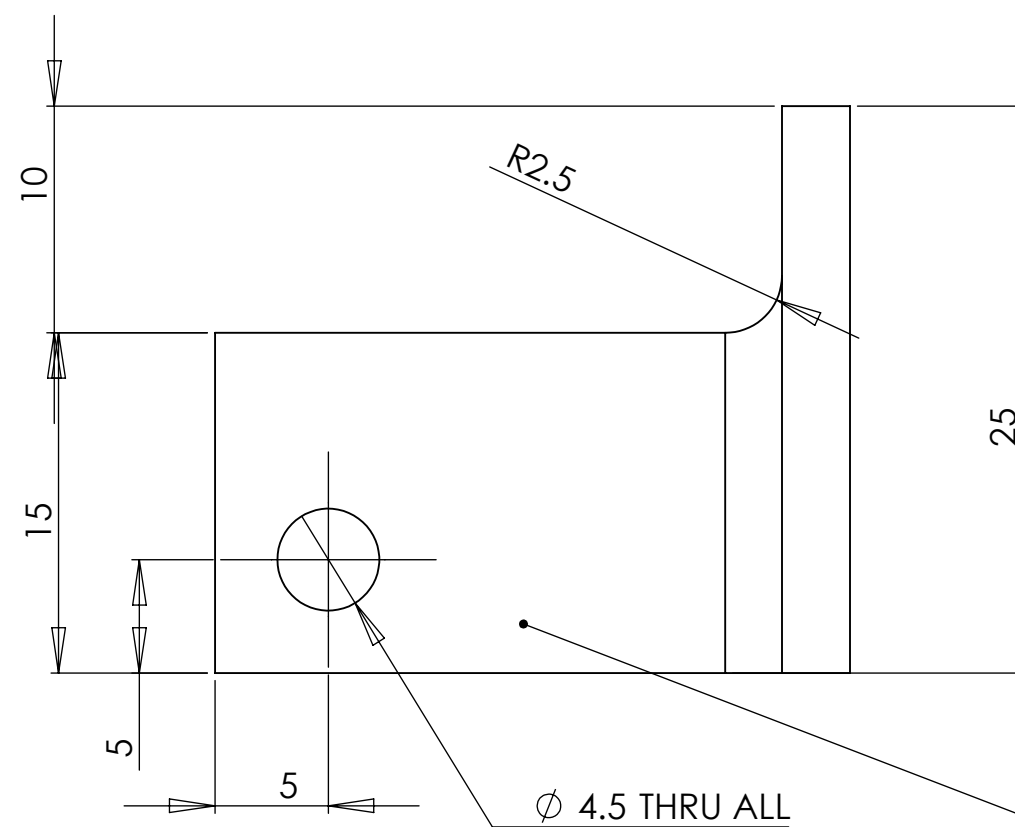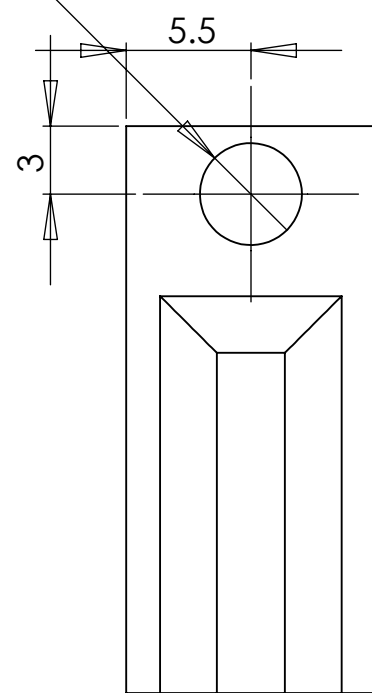

ENGRAVE PART NO SEE NOTES

NOTES AND TOLERANCES: (UNLESS OTHERWISE SPECIFIED)

1. INTERPRET DRAWING PER ASME Y14.5-1994.
2. REMOVE ALL SHARP EDGES, R.02 MIN.
3. DO NOT SCALE FROM DRAWING.
4. ALL MACHINING FLUIDS MUST BE FULLY SYNTHETIC, FULLY WATER SOLUBLE AND FREE OF SULFUR, SILICONE, AND CHLORINE.

**MATERIAL** 6061-T6 Al **FINISH** 1.6 μm

**LIGO** CALIFORNIA INSTITUTE OF TECHNOLOGY  
MASSACHUSETTS INSTITUTE OF TECHNOLOGY

**SYSTEM** ADVANCED LIGO **SUB-SYSTEM** SUS

**NEXT ASSY**

PART NAME		DESIGNER	SIZE	DWG. NO.	REV.
extract assembly L-section		L.CUNNINGHAM	c	D1002213	v2
DRAFTER		L.Cunningham	SCALE: 3:1		PROJECTION:
CHECKER		APPROVAL		SHEET 1 OF 1	

DIMENSIONS ARE IN MM

TOLERANCES:  
.XX ± 0.10  
.XXX ± 0.010

ANGULAR ± 0.2°