


NOTES: (UNLESS OTHERWISE SPECIFIED)
 1. INTERPRET DRAWING PER ANSI
 Y14.5M-1982
 MATERIAL: 6061-T6 ALUMINUM PER
 QQ-A-225/8 OR QQ-A-250/11.

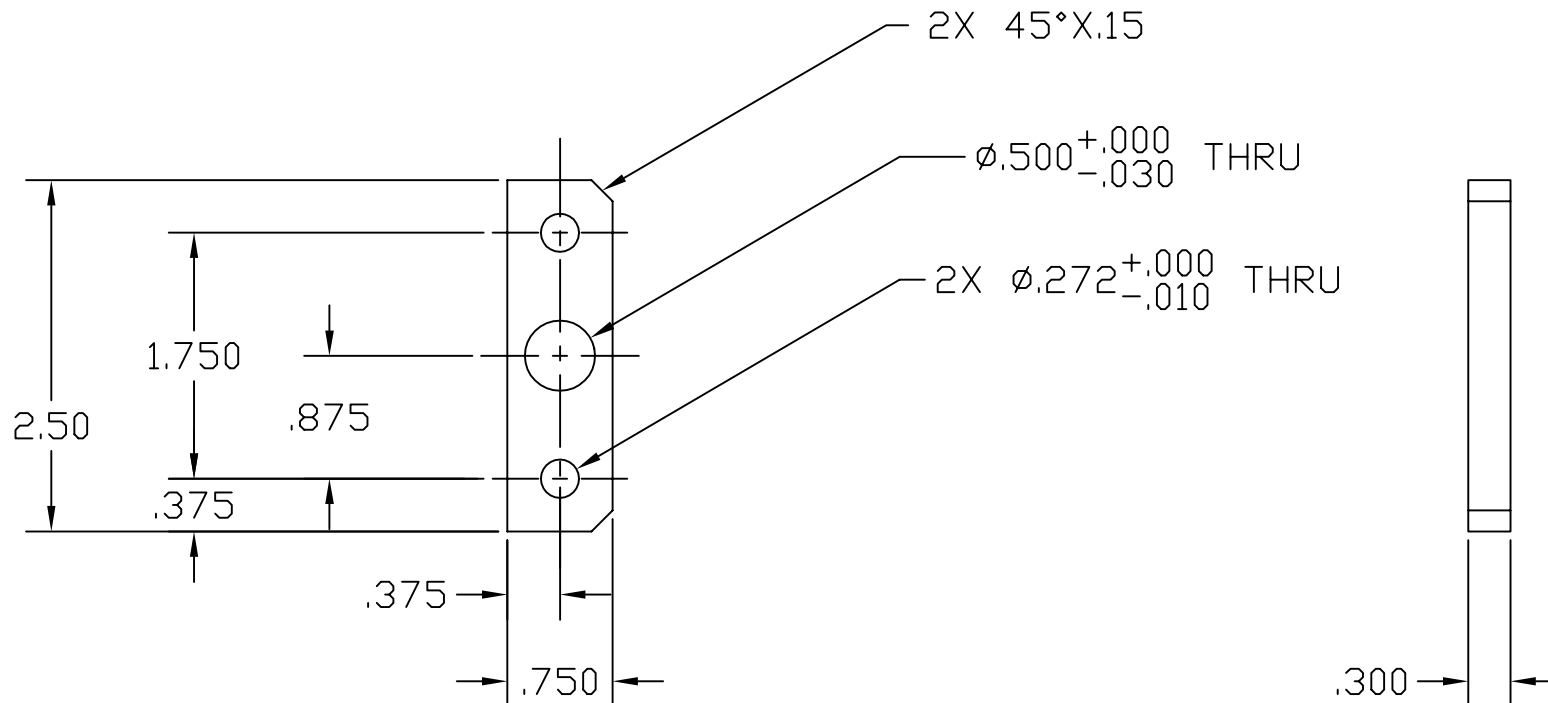

UNLESS OTHERWISE SPECIFIED
 DIMENSIONS ARE IN INCHES

TOLERANCES:
 FRACTIONAL ±
 ANGULAR ± 0.5°
 ANGULAR MACH ± BEND ±
 TWO PLACE DECIMAL ± .03

THREE PLACE DECIMAL ± .005
 FINISHED SURFACE 32 microlinch average
 BREAK CORNERS IN: .005-.010
 REMOVE ALL BURRS

LIGO CALIFORNIA INSTITUTE OF TECHNOLOGY
 MASSACHUSETTS INSTITUTE OF TECHNOLOGY

BEAMSPLITTER OPTIC CARRIER
 STANDOFF SPACER 1

MATERIAL:	HEAT TREAT:	FINISH:	A	DCN E980214-00	C. Corley	9-14-98				CAD FILE	SIZE	DWG. NO.
USED ON:	NEXT ASS'Y: D961450 & D961468	ISSUE DESCRIPTION	REV	DESCRIPTION	DRWN	DATE	CHECK	DATE	SCALE	D980368-A.dwg	A	D980368-A-D
									1/1			SHEET 1 OF 1