




REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED

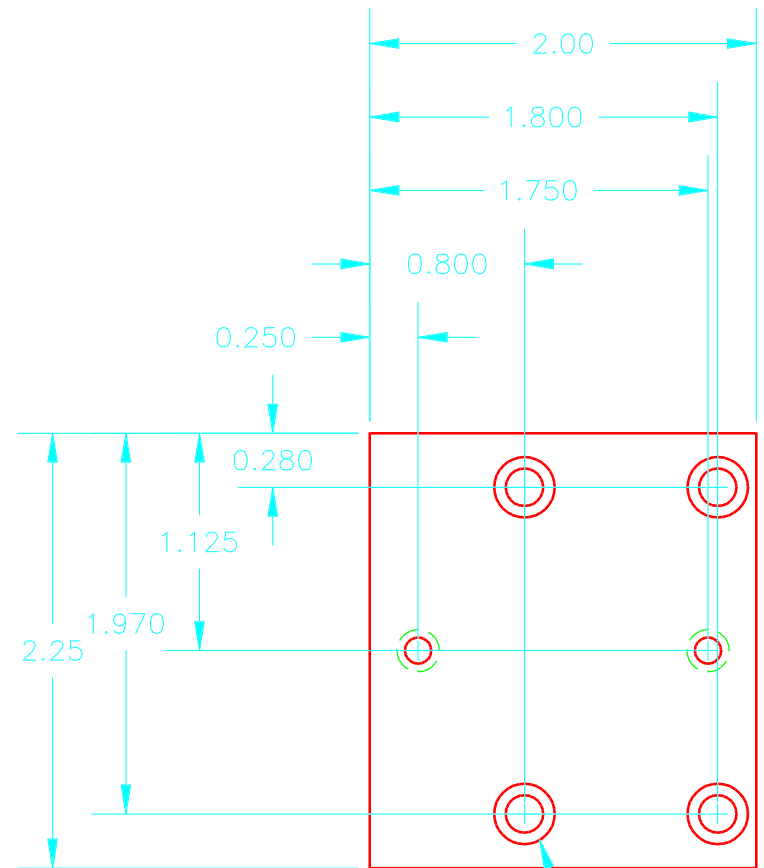

DRILL #10 (0.194) DIA. THRU  
C'BORE 5/16 IN. DIA. x 0.20 DEEP  
(4) PLACES

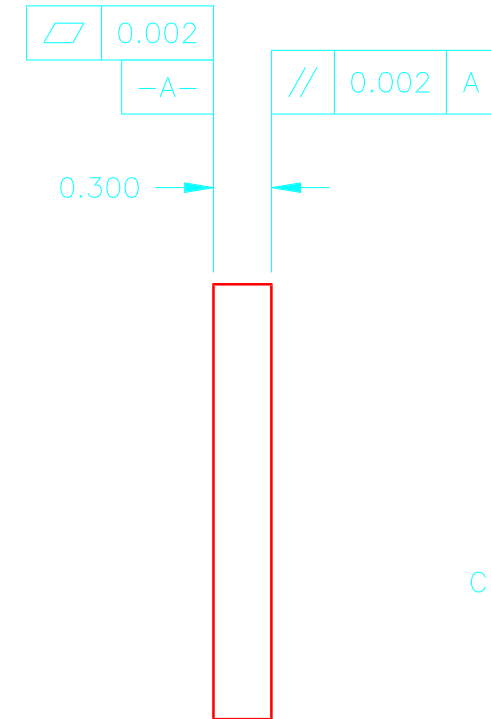

DRILL #29 (0.136) DIA. THRU  
C'BORE 7/32 IN. DIA. x 0.15 DEEP  
(2) PLACES

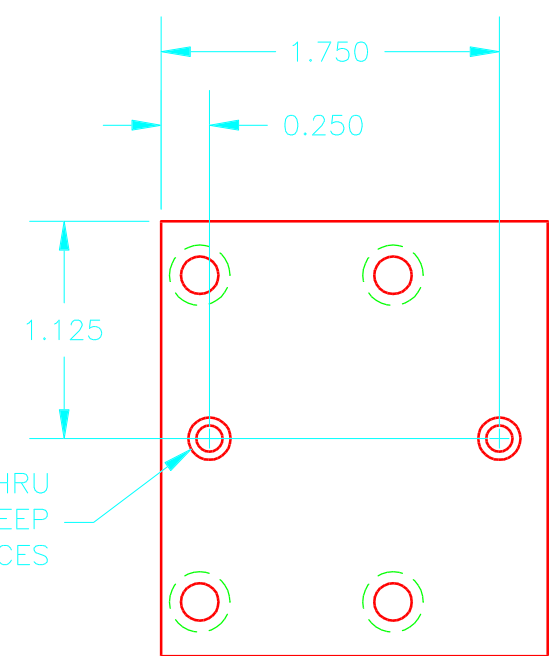

**NOTES:**

1. BREAK ALL SHARP EDGES
2. ANODIZE TYPE 2, CLASS 2 BLACK PENETRATION 0.001, BUILDUP 0.001

QTY REQD	FSCM NO.	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION
PARTS LIST				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS    DECIMALS    ANGLES ±                .XX±.01                ± .XXX±.005 .XXXX±.0005		CONTRACT NO.		<b>LIGO Project</b> <i>California Institute of Technology</i> <i>Massachusetts Institute of Technology</i>
MATERIAL <b>6061-T6</b>		APPROVALS	DATE	<b>PSL Pre-stabilized Laser</b>
FINISH <b>SEE NOTE 2</b>		DRAWN <b>P. KING</b>	08/24/98	<b>9071 TILT STAGE</b> <b>1205C-843 AOM BASE</b>
NEXT ASSY	USED ON	CHECKED	ISSUED	SIZE <b>B</b> FSCM NO.    DWG. NO. <b>LIGO-D980672-00-D</b> REV.
APPLICATION		DO NOT SCALE DRAWING		SCALE    SHEET <b>1 of 1</b>