

D1200139_dLIGO AOS ITM BAFFLE INTERFACE MOUNTING PLATE, BSC2 H1-L1, PART PDM REV: X-008, DRAWING PDM REV: X-013

8

7

6

5

4

3



2

1

NOTES CONTINUED:

- 5. SCRIBE, ENGRAVE (A VIBRATORY TOOL MAY BE USED), LASER MARK OR MECHANICALLY STAMP (NO INKS OR DYES) DRAWING PART NUMBER, REVISION (AND VARIANT OR "TYPE" IF APPLICABLE) ON NOTED SURFACE OF PART FOLLOWED ON THE NEXT LINE WITH A THREE DIGIT SERIAL NUMBER. SERIAL NUMBERS START AT 001 FOR THE FIRST ARTICLE AND PROCEED CONSECUTIVELY. USE MINIMUM 0.12" HIGH CHARACTERS, UNLESS THE SIZE OF THE PART DICTATES SMALLER CHARACTERS. EXAMPLE: DXXXXXX-VY, TYPE-XX, S/N XXX
- 6. APPROXIMATE WEIGHT = 27.334 LBS.
- 7. MACHINE ALL SURFACES TO REMOVE OXIDES AND MILL FINISH. USE OF ABRASIVE REMOVAL TECHNIQUES IS NOT ALLOWED. REFER TO LIGO-E0900364
- 8. ALL PARTS SHALL BE MANUFACTURED IN ACCORDANCE WITH LIGO SPECIFICATION E0900364.
- 9. ALL MATERIAL IS TO BE VIRGIN MATERIAL (i.e. NO WELD REPAIRS, PLUGS OR RECYCLED MATERIAL). NO REPAIRS SHALL BE MADE UNLESS APPROVED IN ADVANCE, AND IN WRITING, BY LIGO LABORATORY. REFER TO LIGO-E0900364.

| REV. | DATE | DCN # | DRAWING TREE # |
|------|-------------|----------|----------------|
| v1 | 14 NOV 2011 | E1101007 | - |
| v2 | 7 MAY 2012 | - | - |
| - | - | - | - |

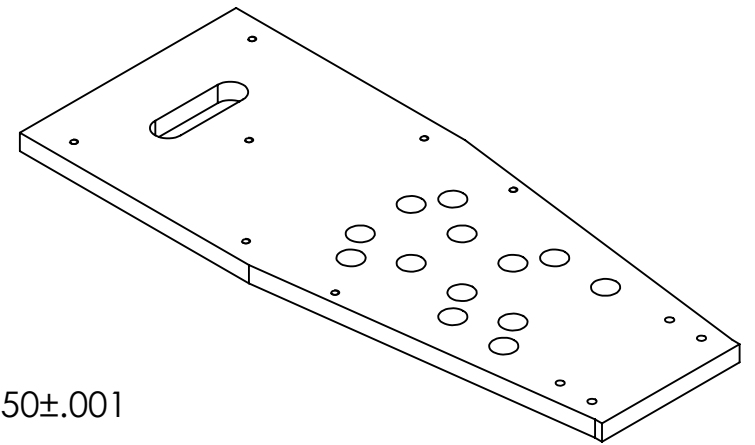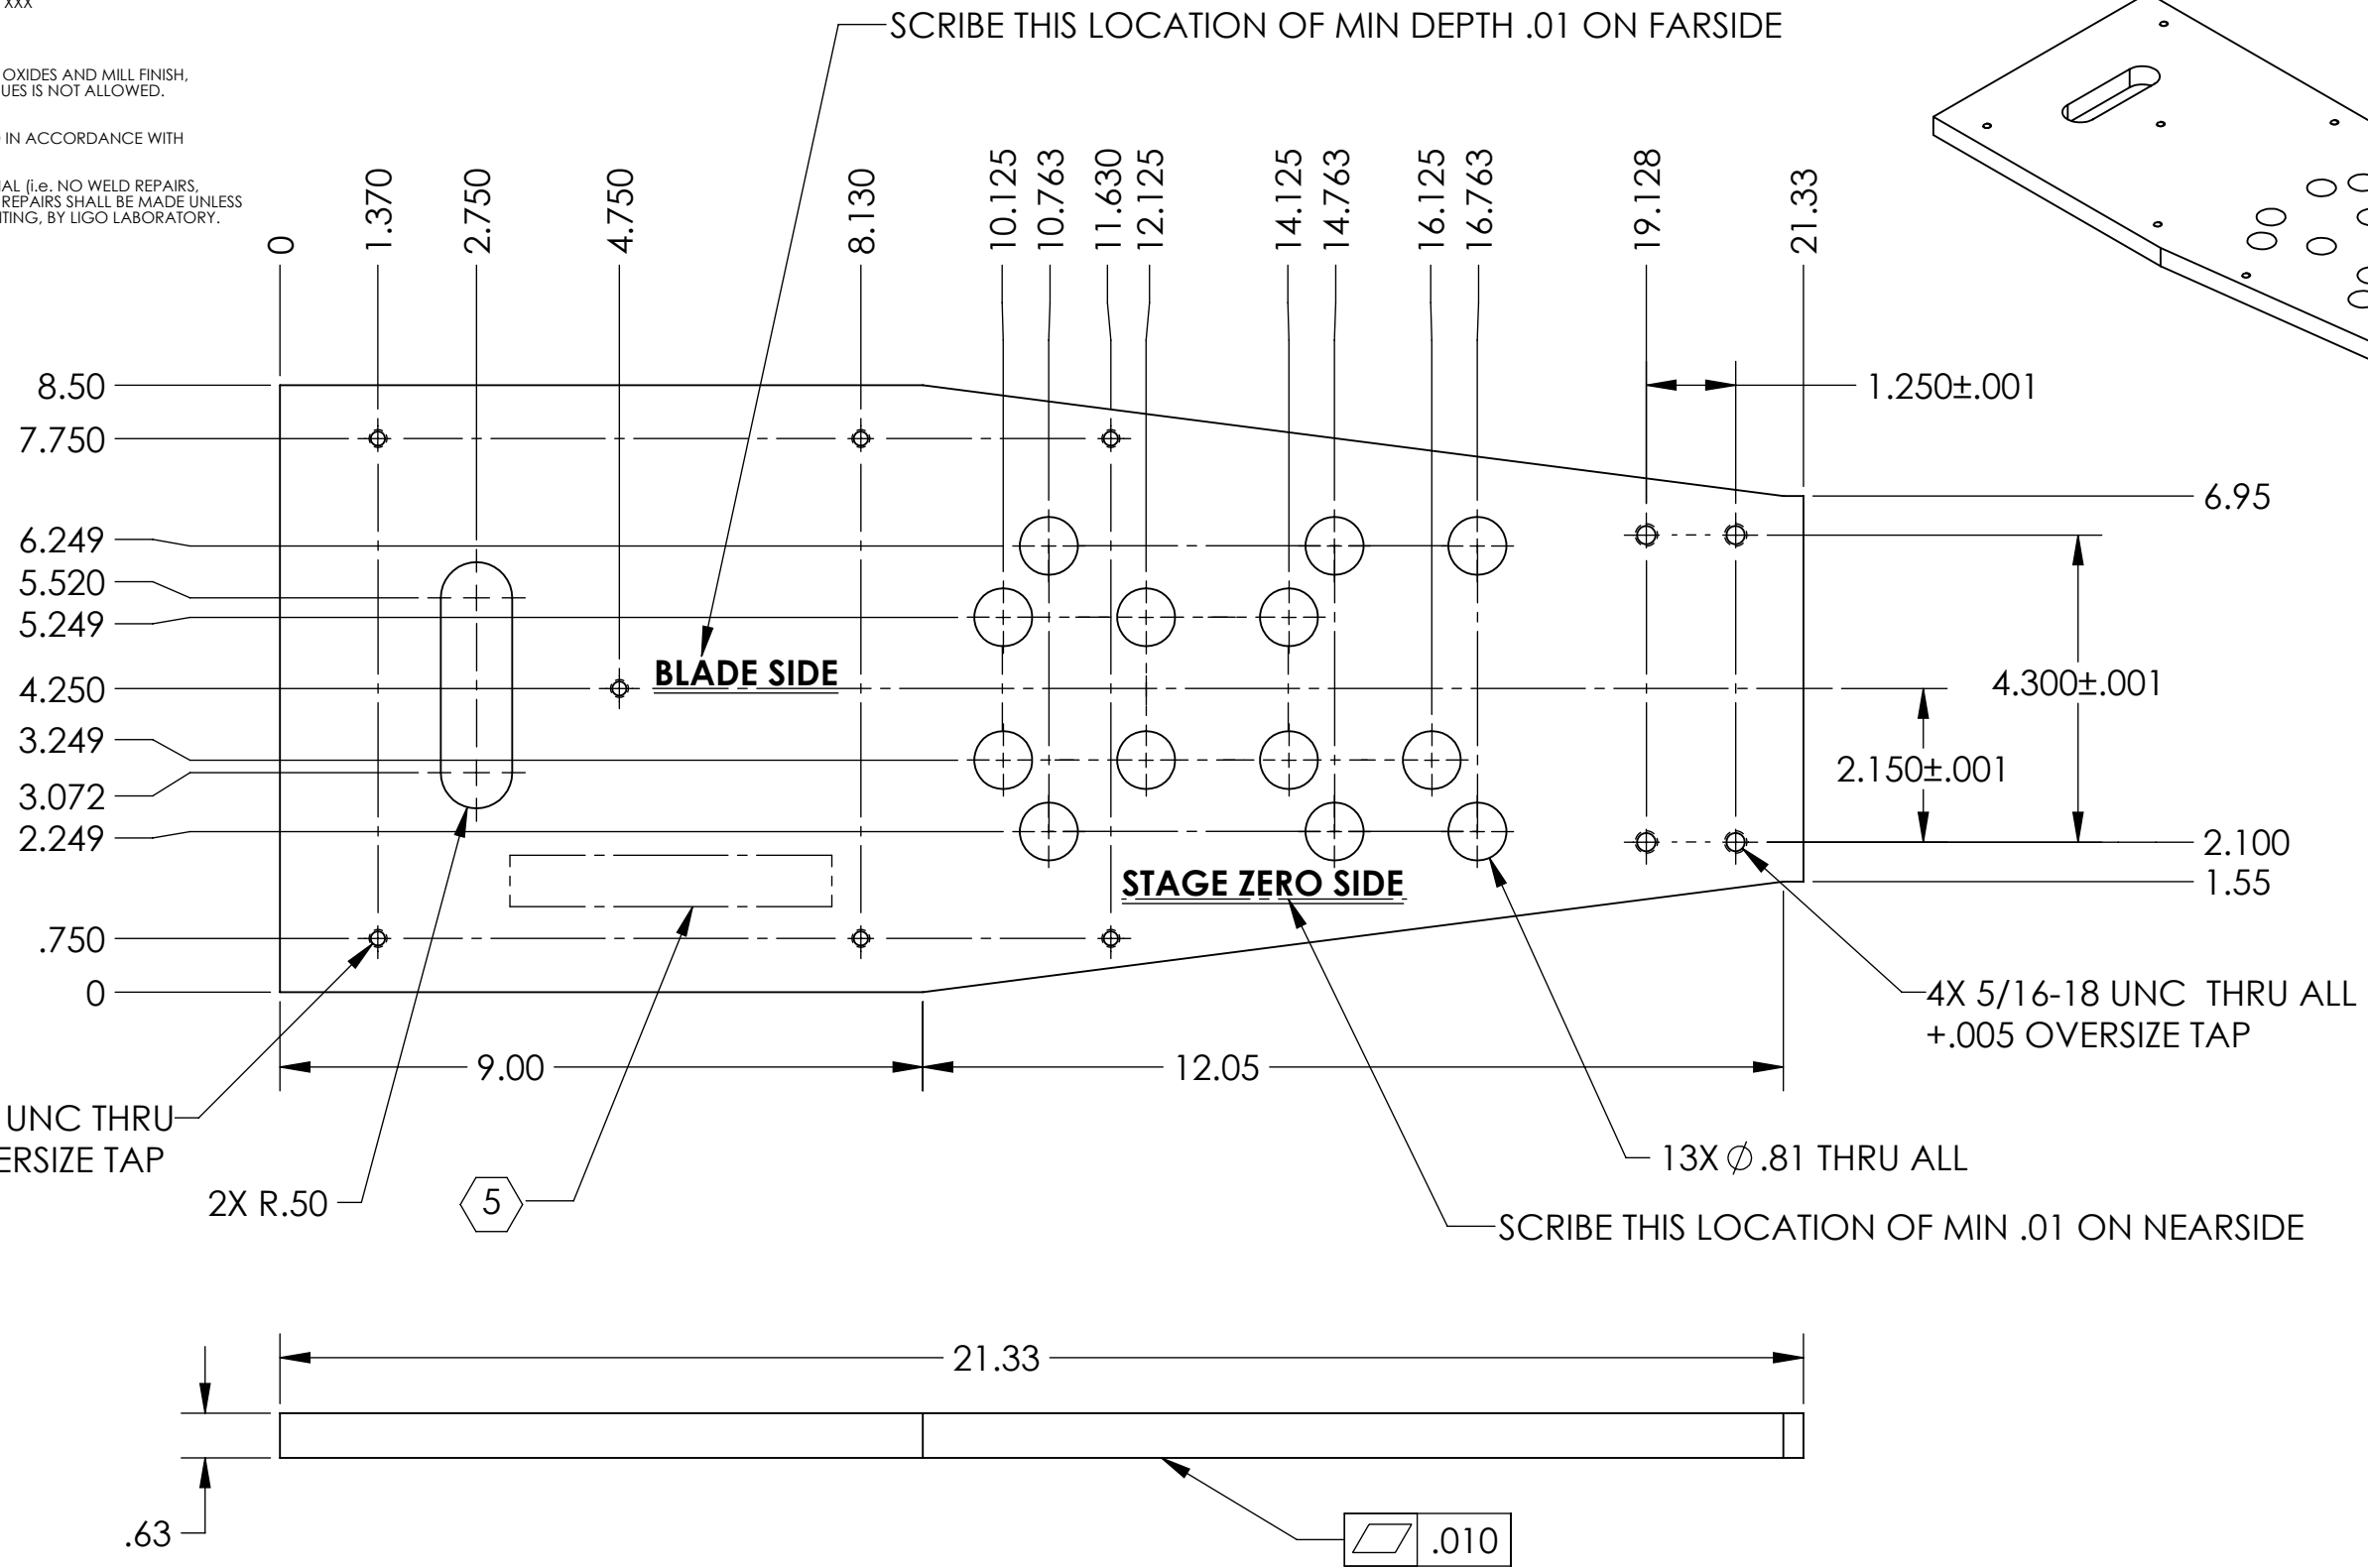

NOTES AND TOLERANCES: (UNLESS OTHERWISE SPECIFIED)

| | |
|---|----------|
| DIMENSIONS ARE IN INCHES | |
| TOLERANCES: .XX ± .01 .XXX ± .005 | |
| ANGULAR ± 1.0° | |
| 1. INTERPRET DRAWING PER ASME Y14.5-1994. 2. REMOVE ALL SHARP EDGES, .005-.015, FOR MACHINED PARTS. ROUND ALL EDGES APPROXIMATELY R.02 FOR SHEET METAL PARTS. 3. DO NOT SCALE FROM DRAWING. 4. ALL MACHINING FLUIDS MUST BE FULLY SYNTHETIC, FULLY WATER SOLUBLE AND FREE OF SULFUR, SILICONE, AND CHLORINE. | |
| MATERIAL | 304 SSSL |
| FINISH | 63 μinch |

LIGO CALIFORNIA INSTITUTE OF TECHNOLOGY
MASSACHUSETTS INSTITUTE OF TECHNOLOGY

SYSTEM: ADVANCED LIGO SUB-SYSTEM: AOS

NEXT ASSY: D1200140

| | | | |
|--------------------------------------|-------------|----------------------|---|
| PART NAME | | αLIGO AOS ITM BAFFLE | |
| INTERFACE MOUNTING PLATE, BSC2 H1-L1 | | SIZE DWG. NO. | |
| DESIGNER | J. TERRAZAS | 11 NOV 2011 | B |
| DRAFTER | J. TERRAZAS | 14 NOV 2011 | |
| CHECKER | M. SMITH | | |
| APPROVAL | M. SMITH | | |
| SCALE: 1:4 | | PROJECTION: | |
| SHEET 1 OF 1 | | D1200139 | |

8

7

6

5

4

3

2

1