
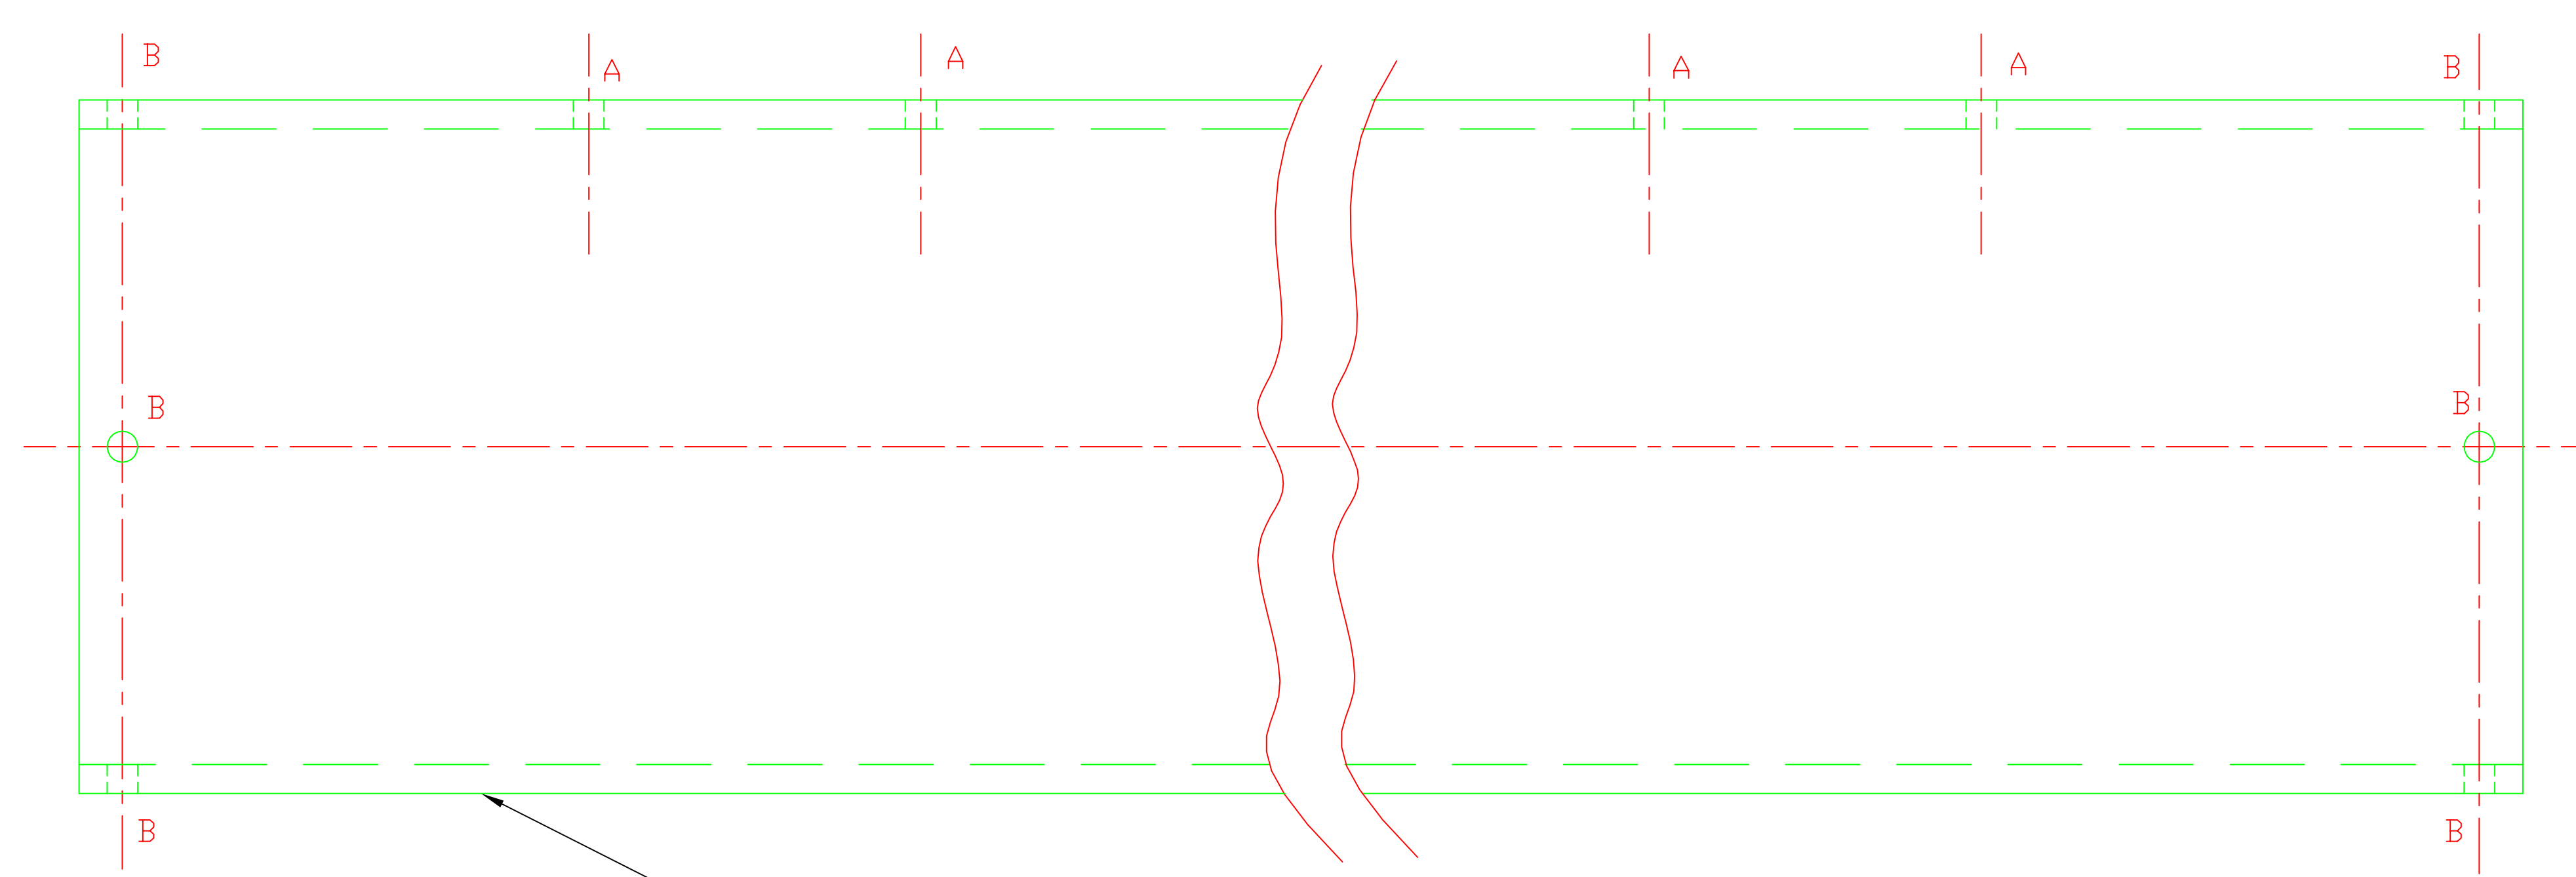
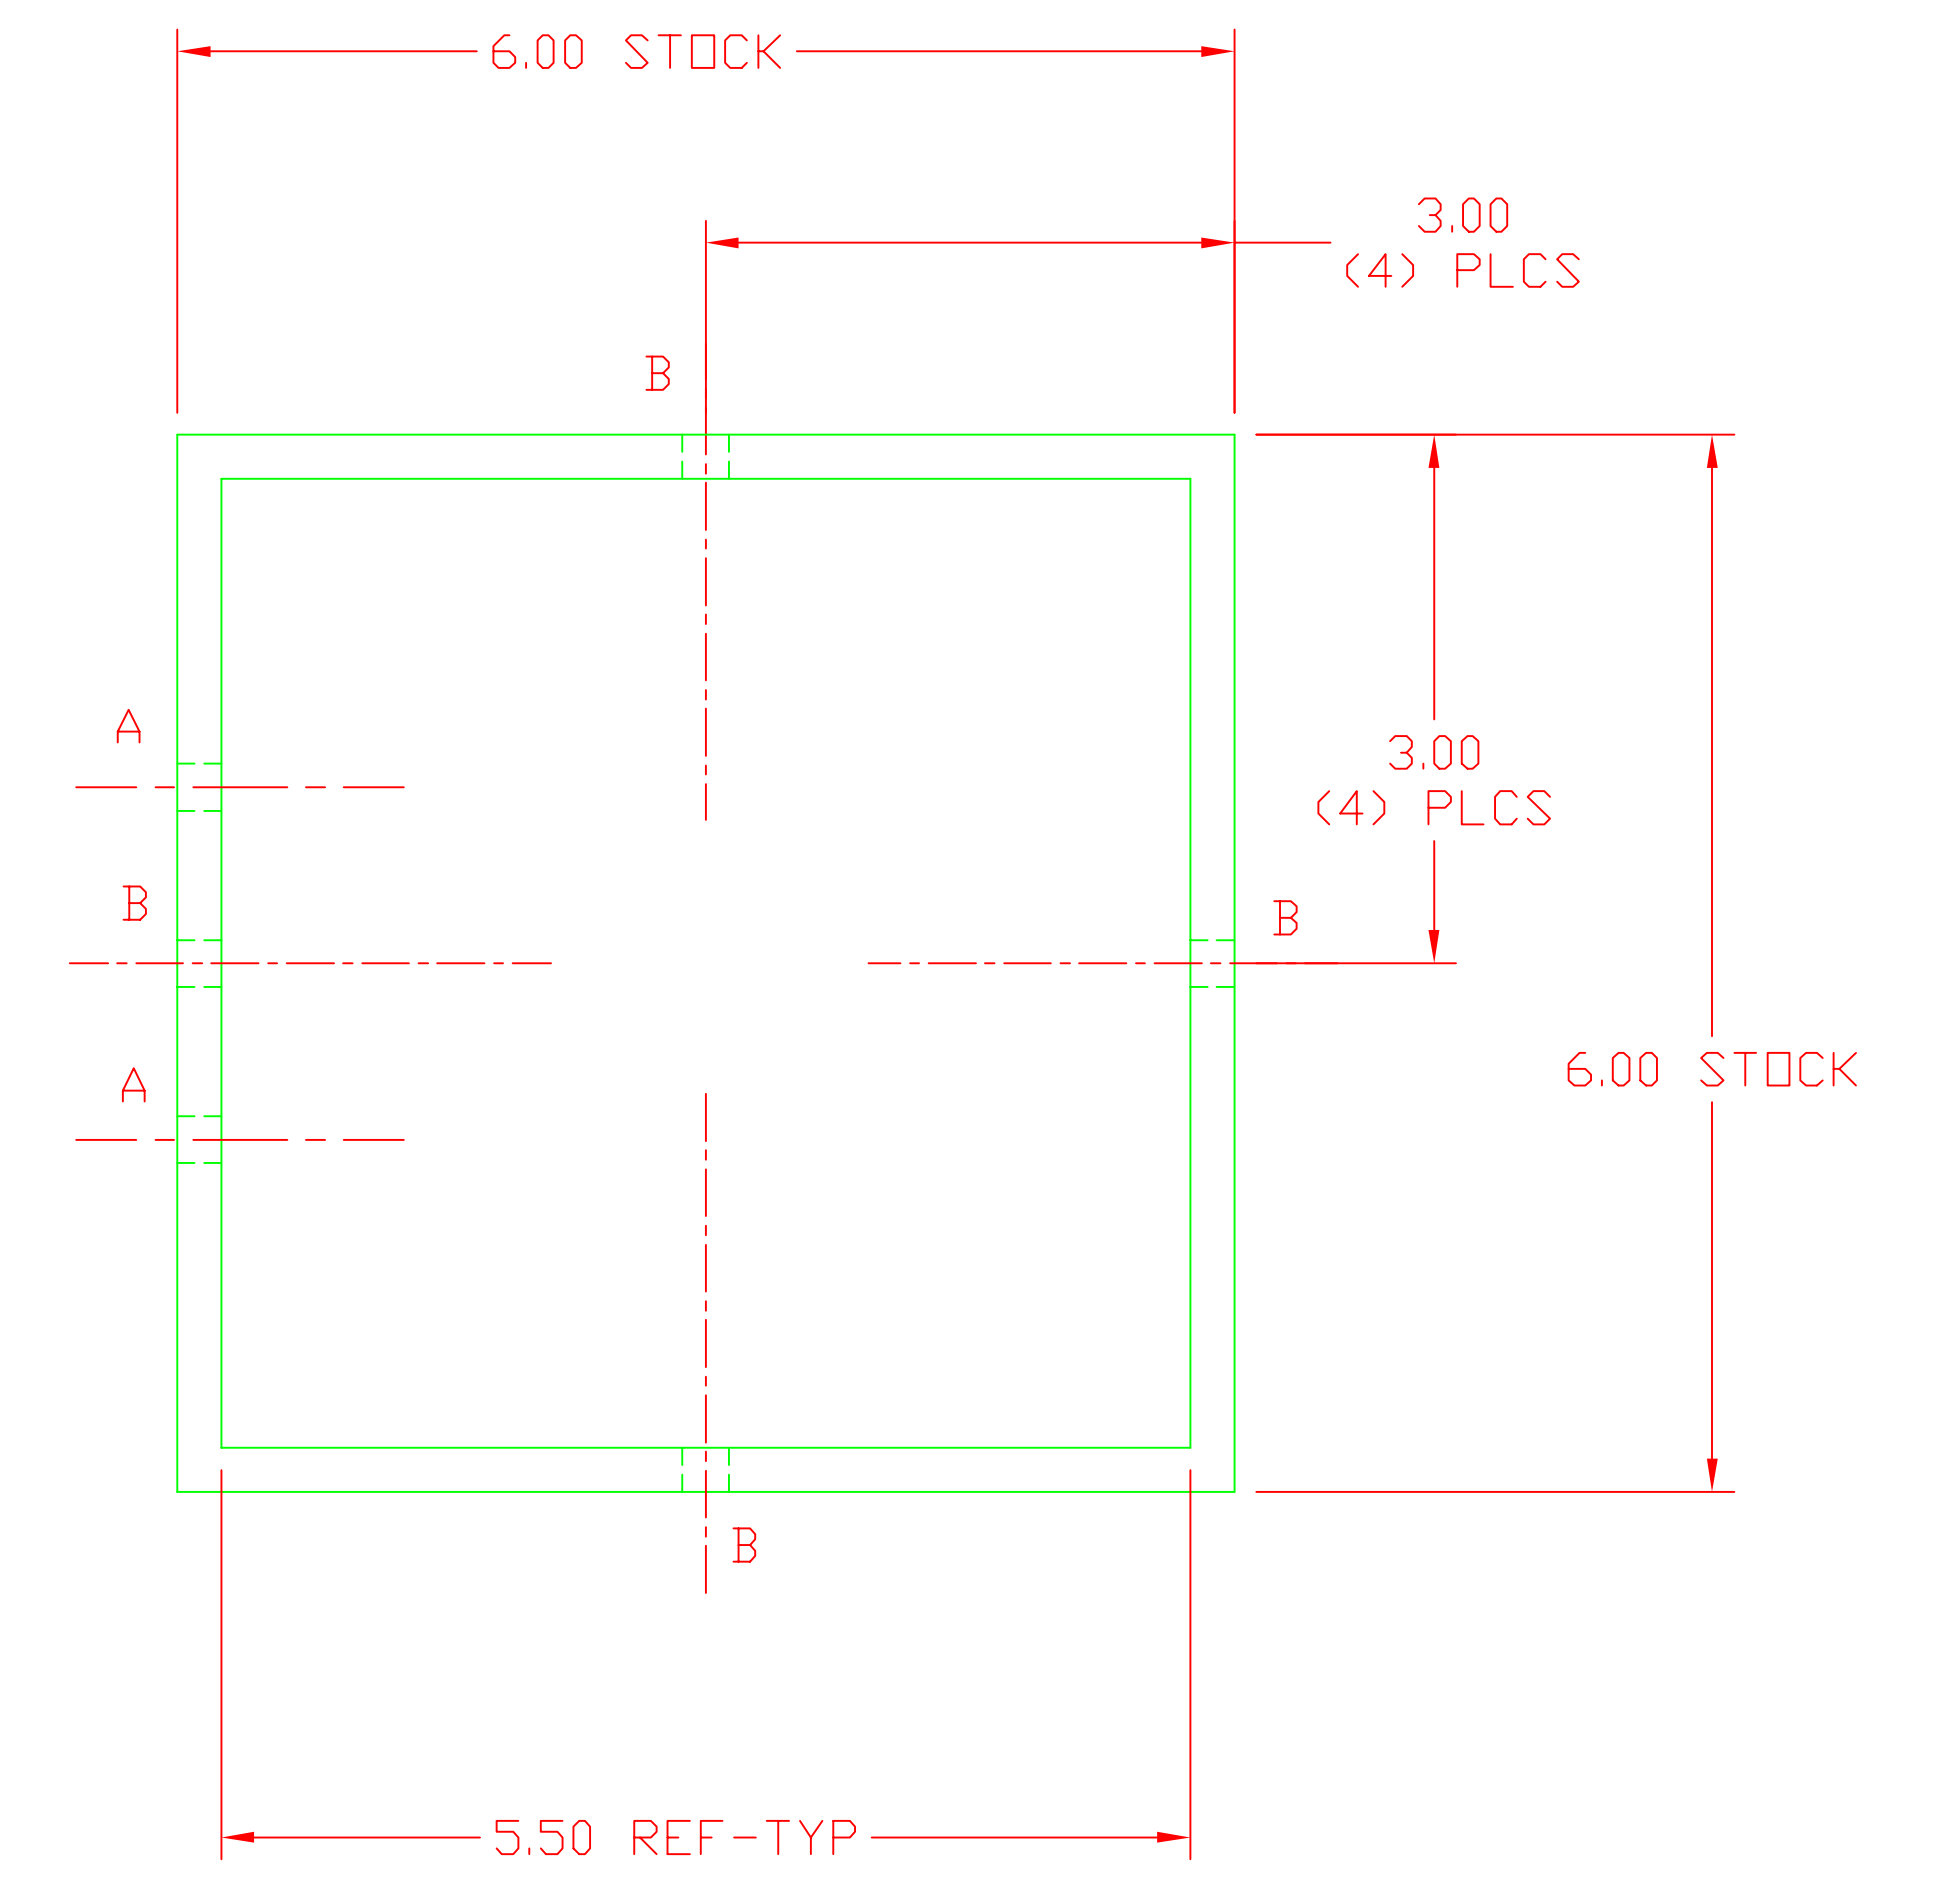


DASH NUMBER	DIM			SERIAL NUMBER	LOCATION USED
	"A"	"B"	"C"		
-1	45.00	4.41	4.69	SN001	BSC 8
-2	X	X	X	X	X
-3	X	X	X	X	X
-4	X	X	X	X	X
-5	X	X	X	X	X
-6	X	X	X	X	X
-7	X	X	X	X	X
-8	X	X	X	X	X
-9	X	X	X	X	X
-10	X	X	X	X	X

NOTES: (UNLESS OTHERWISE SPECIFIED)
 1. CUTTING FLUIDS TO BE WATER SOLUBLE AND FREE OF SULFUR, CHLORINE, & SILICONE.
 STEEL STAMP OR ENGRAVE THE DRAWING PART NUMBER ON NOTED FACE OF PART FOLLOWED BY "S/N", THEN A THREE DIGIT SERIAL NUMBER. SERIAL NUMBERS TO START AT 001 FOR FIRST PART AND PROCEED IN A CONSECUTIVE MANNER TO A MAXIMUM OF 999, FOR EACH SUCCEEDING PART PRODUCED. USE .013 HIGH CHARACTERS.
 EXAMPLE: D990038-A S/N 001

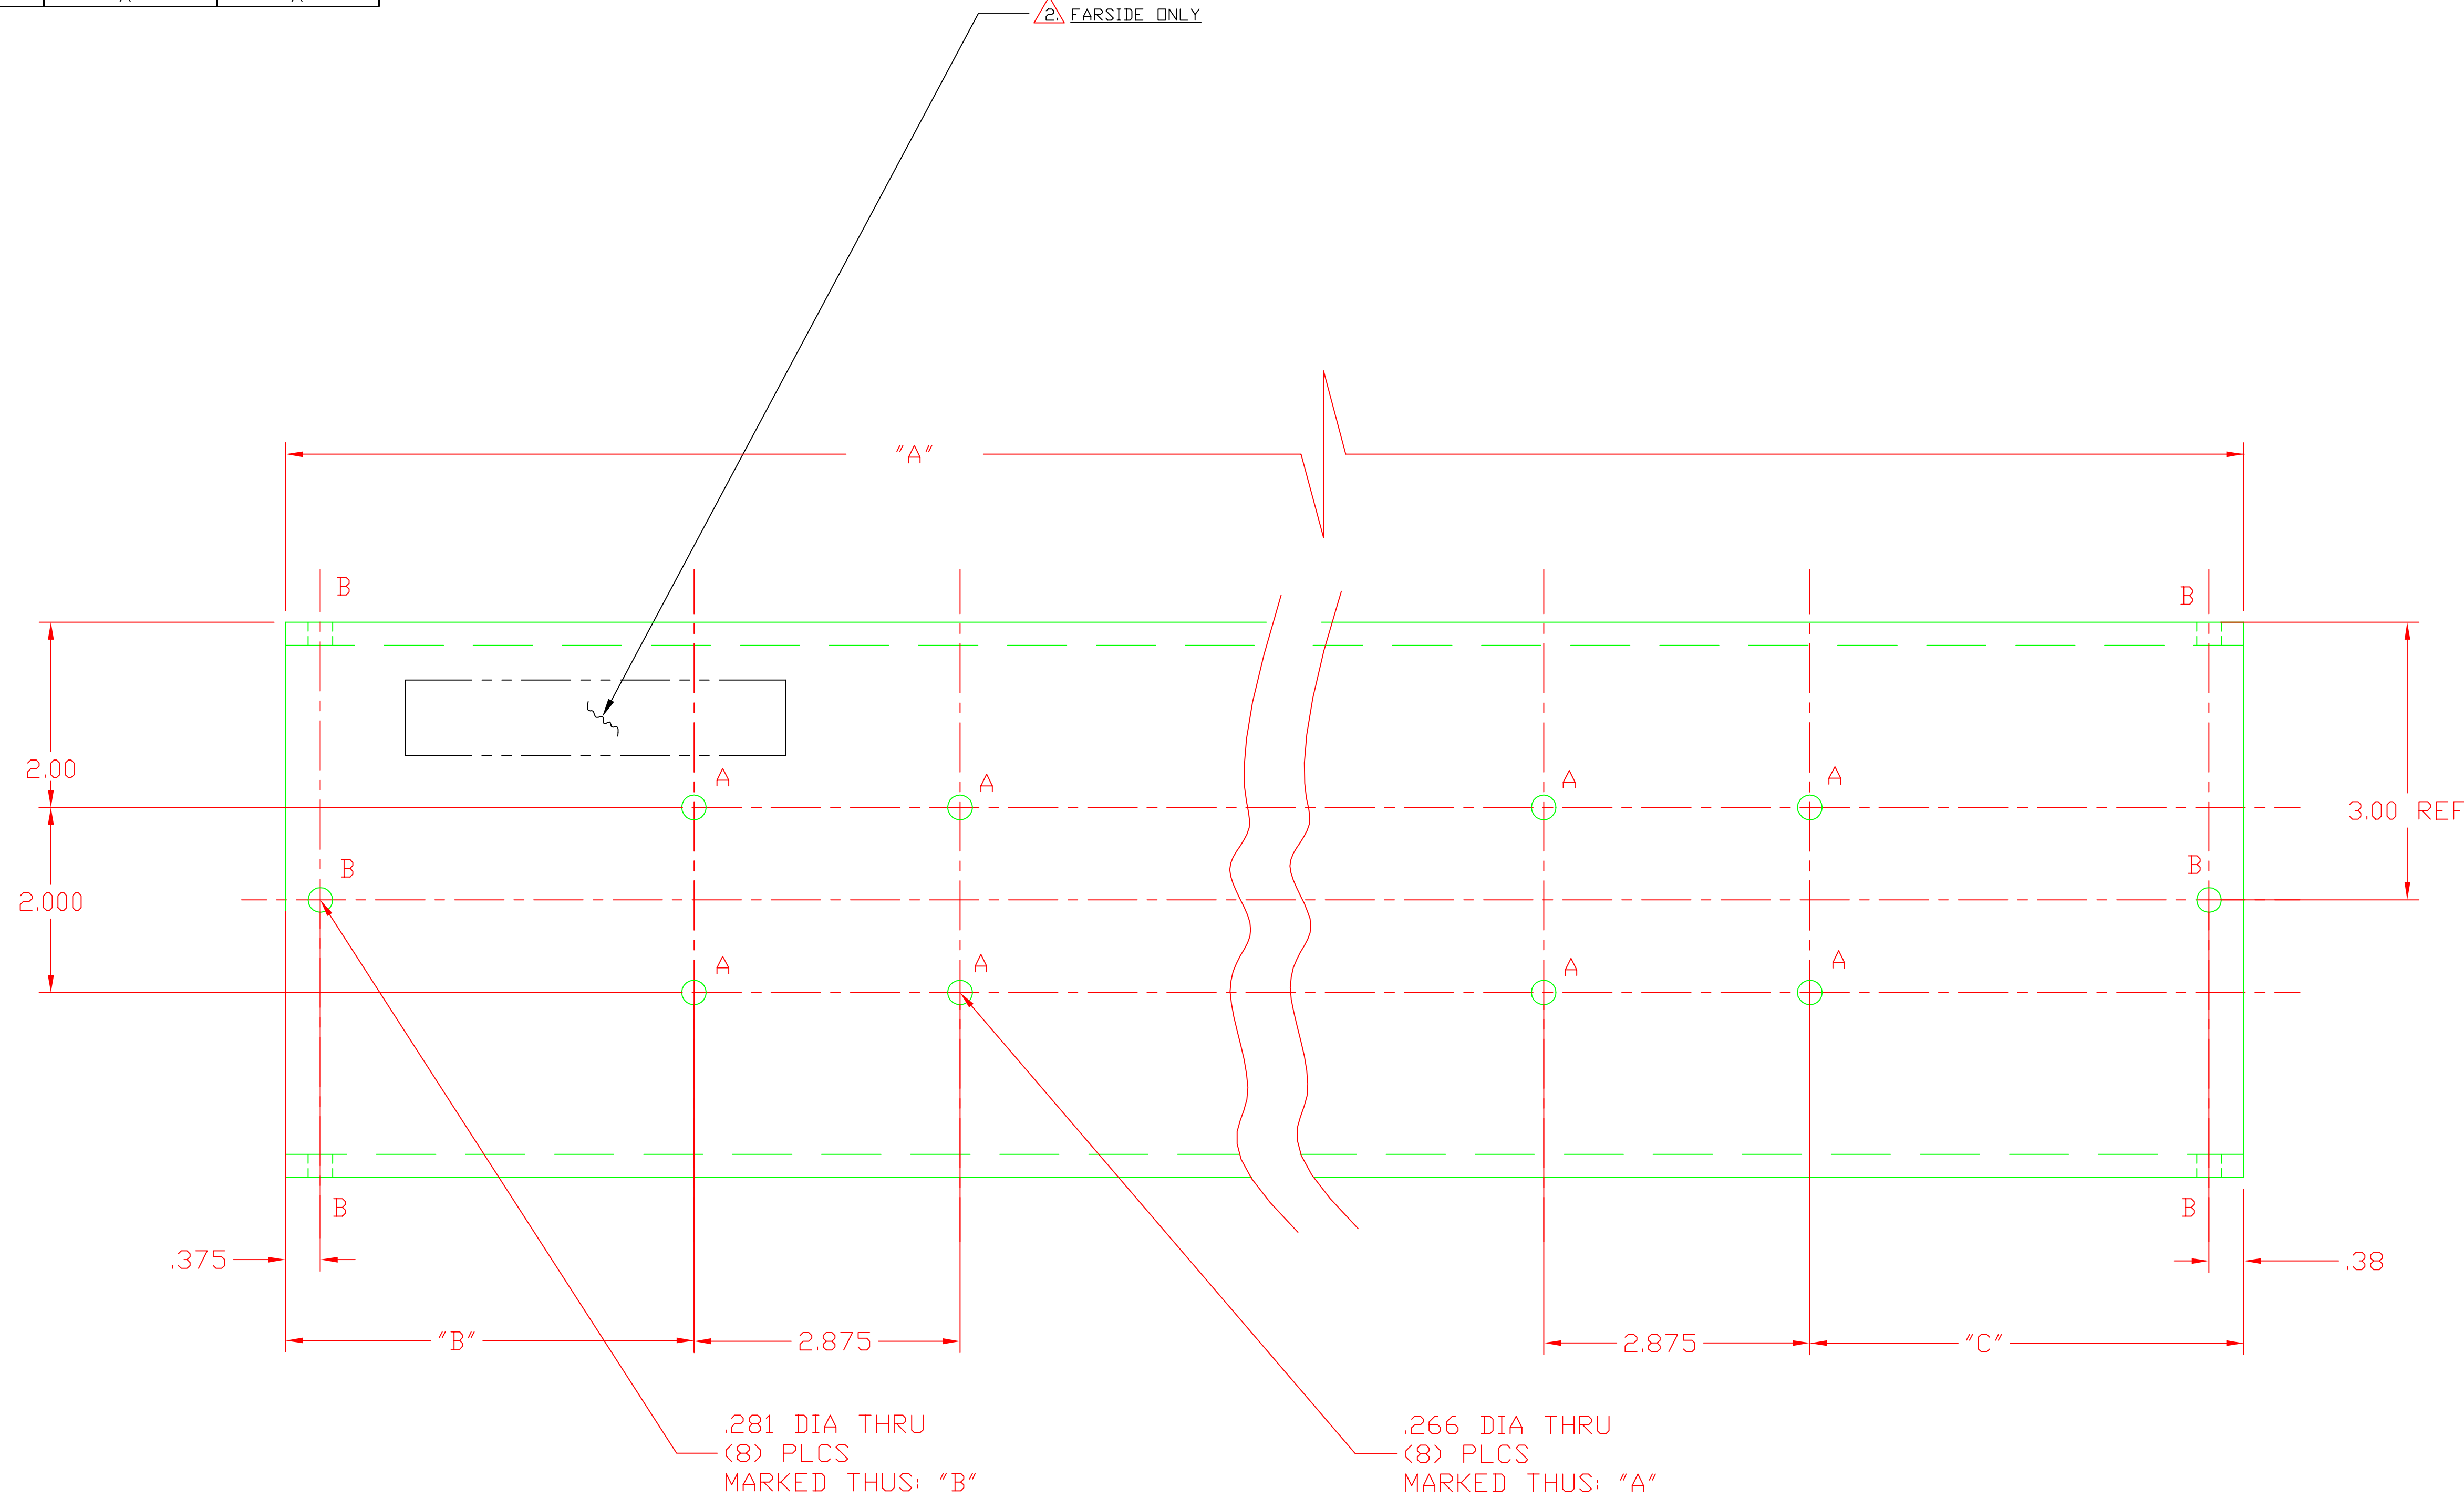

MARK THIS SURFACE REF

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES (mm)		TOLERANCES: FRACTIONAL ± 1/64 ANGULAR ± 1/2° ANGULARMACH ± BEND ± TWO PLACE DECIMAL ±.01		THREE PLACE DECIMAL ±.005 FINISHED SURFACE RMS BREAK CORNERS .005 - .015 REMOVE ALL BURRS		MATERIAL: TYPE 6061-T6 SQUARE ALUMINUM TUBING 6.00 SQ. O.D. X 5.50 SQ. I.D.		HEAT TREAT:		FINISH:		A		RELEASE		E990198		-		-		-		KABOT		4-29-99	
DWG. NO.		DESCRIPTION		USED ON: XXX		NEXT ASS'Y: XXX		REV		ISSUE DESCRIPTION		DCN NUMBER		APPR'D		CHECK		DRWN		DATE		SCALE		NTS		SHEET 1 OF 1	
8		7		6		5		4		3		2		1													

LIGO CALIFORNIA INSTITUTE OF TECHNOLOGY
 MASSACHUSETTS INSTITUTE OF TECHNOLOGY

BEAM DUMP,
 FLEX HINGE, H_TUBE

CAD FILE: h_tube_tab.dwg
 SIZE: E
 DWG. NO.: D990198-A