


NOTES CONTINUED:

REV.	DATE	DCN #	DRAWING TREE #
V1	09 JUL 2012	E1200700	
V2	13 JUL 2012	E1200700	
V3	20 AUG 2012	E1200700	

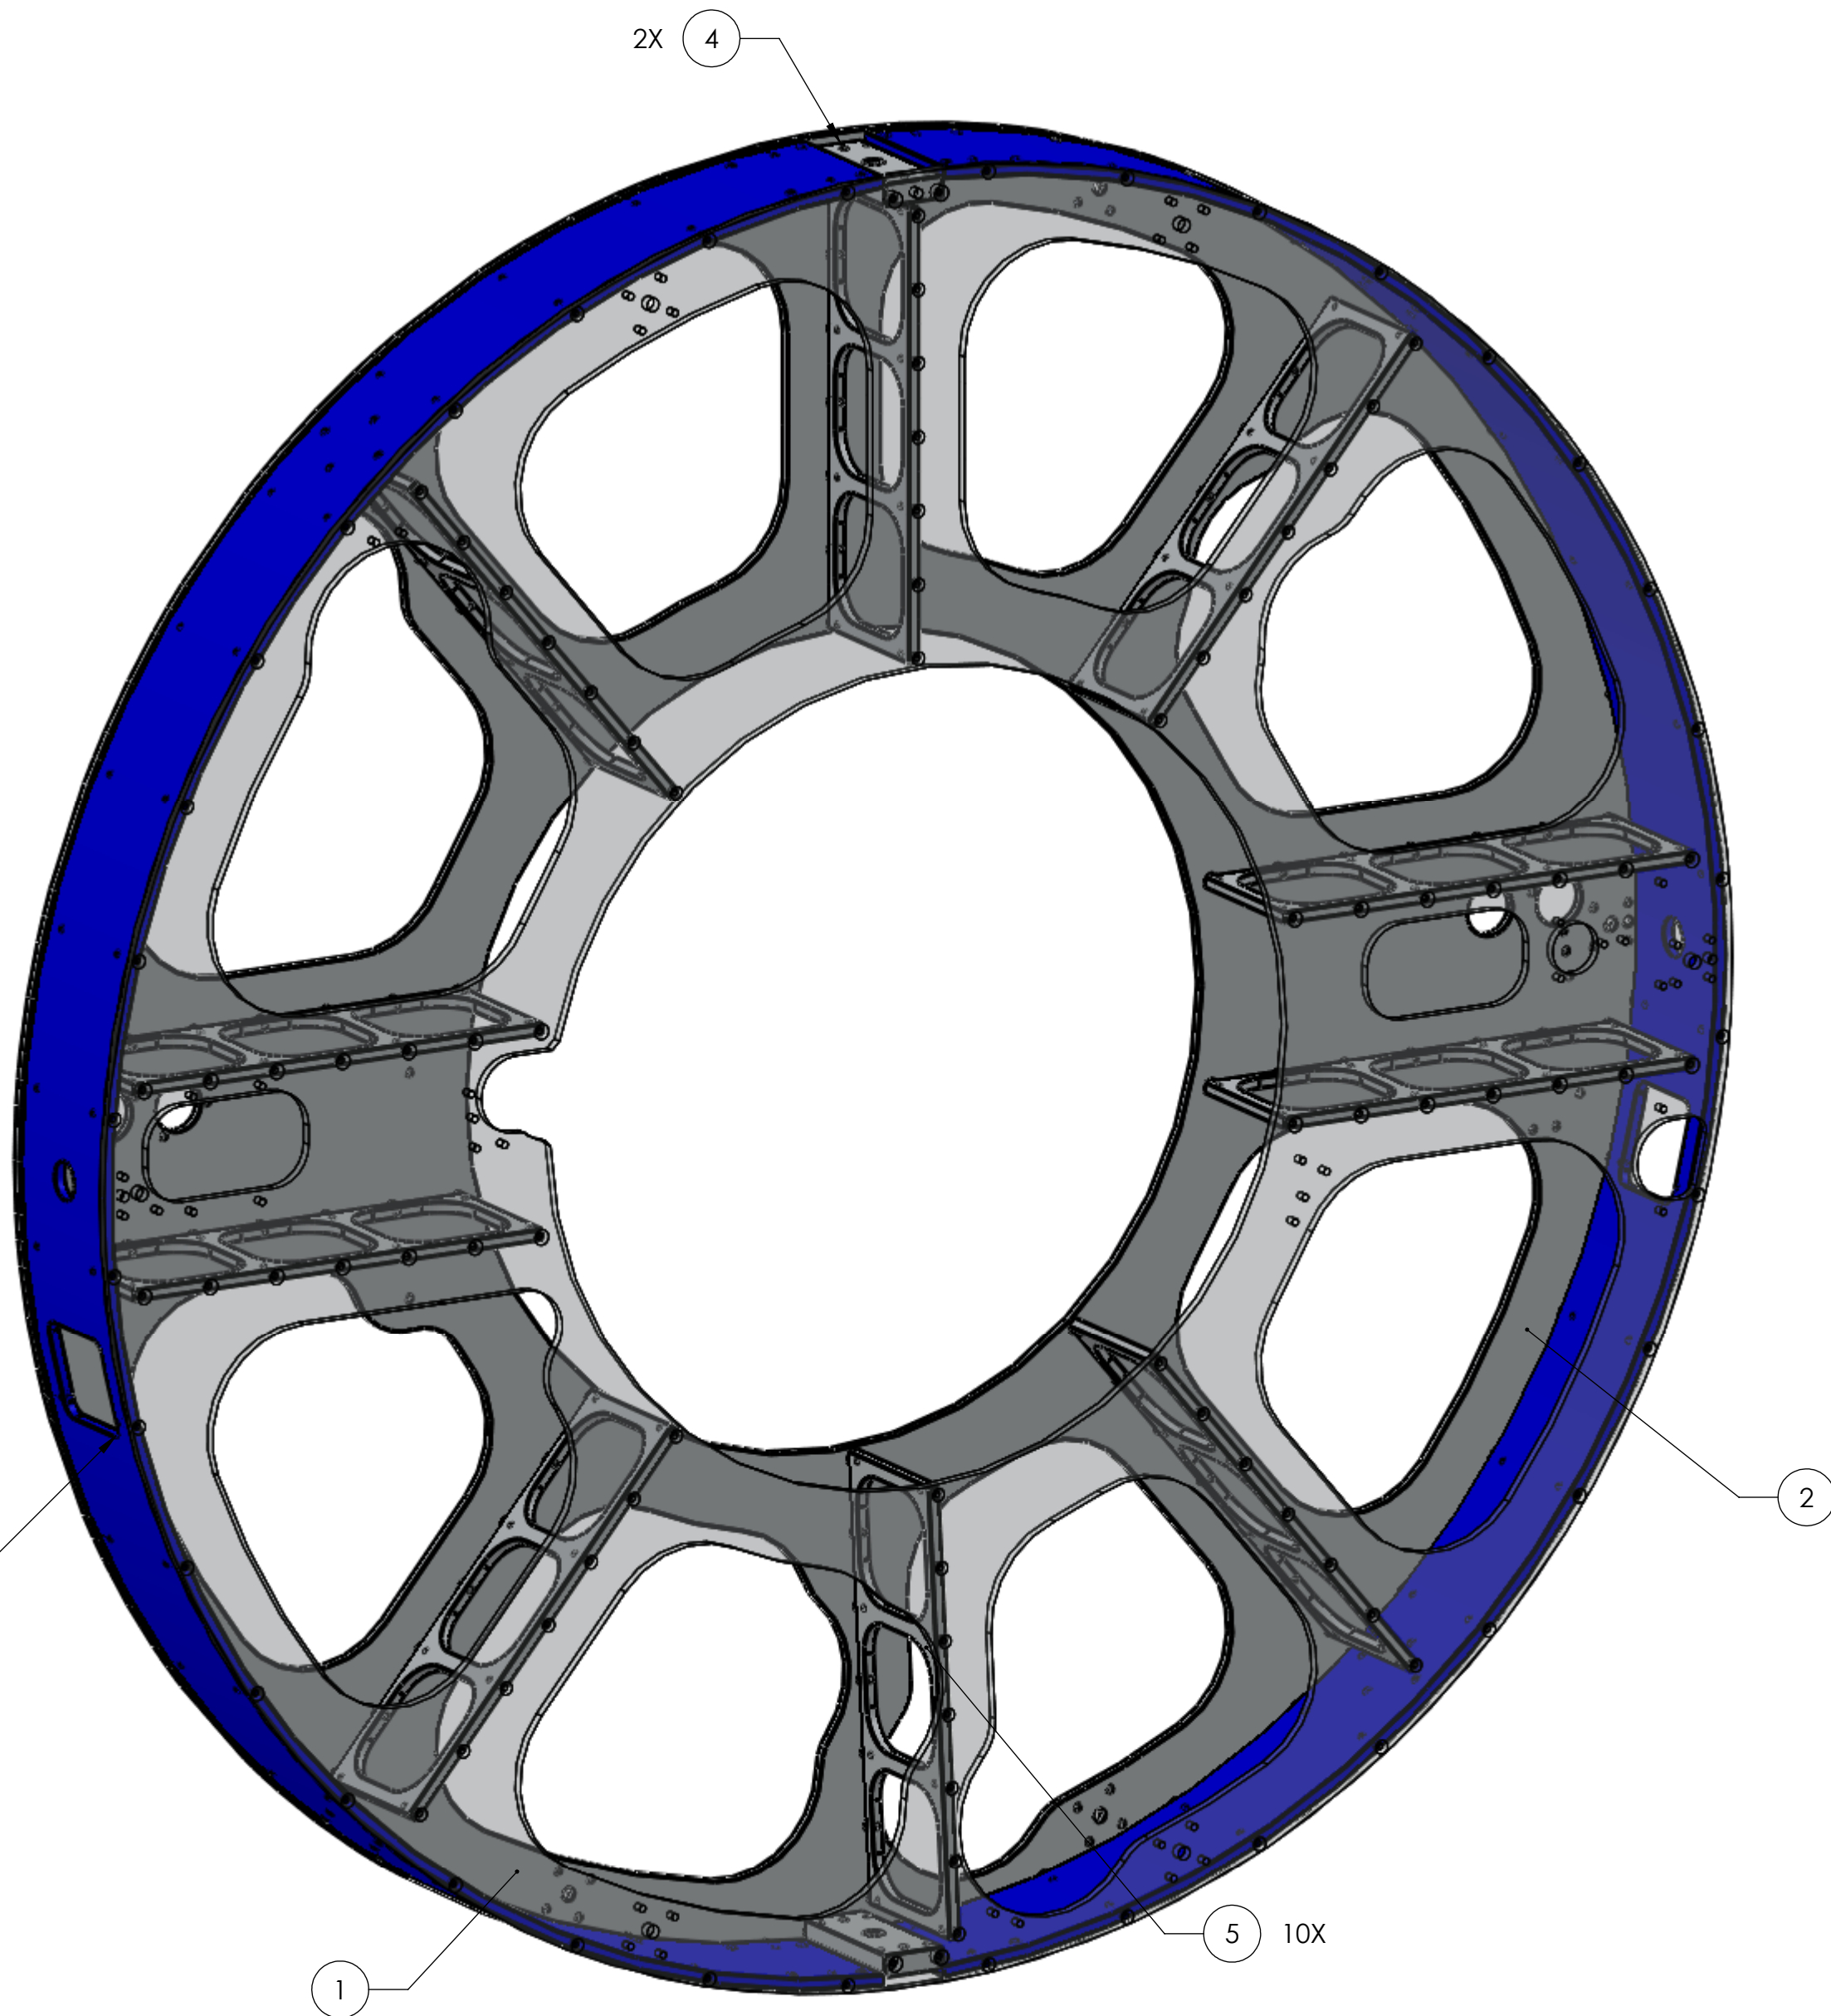

### D1200993-1 ALIGO, PCAL PERISCOPE FRAME (ETMY)


ITEM NO.	QTY.	PART NUMBER	DESCRIPTION	SUPPLIER
6	220	FA-2008	SCRW FLT HD 1/4-20 X .50LG VENTED	UC COMPONENTS
5	10	D1200725	PCAL PLATE STRUT	
4	2	D1200731	PCAL PLATE RING CONNECTOR	
3	2	D1102354	PCAL SUSPENSION RING RECEIVE SIDE	
2	2	D1200727-1	PCAL PLATE MIRROR MTG	
1	2	D1200726-1	PCAL PLATE CAMERA MIRROR MTG	
BOM Table				

**NOTES AND TOLERANCES: (UNLESS OTHERWISE SPECIFIED)**

1. INTERPRET DRAWING PER ASME Y14.5-1994. 2. REMOVE ALL SHARP EDGES, .005-.015, FOR MACHINED PARTS. ROUND ALL EDGES APPROXIMATELY R.02 FOR SHEET METAL PARTS. 3. DO NOT SCALE FROM DRAWING. 4. ALL MACHINING FLUIDS MUST BE FULLY SYNTHETIC, FULLY WATER SOLUBLE AND FREE OF SULFUR, SILICONE, AND CHLORINE.	
<b>MATERIAL</b>	N/A
<b>FINISH</b>	N/A μinch


CALIFORNIA INSTITUTE OF TECHNOLOGY MASSACHUSETTS INSTITUTE OF TECHNOLOGY	
<b>SYSTEM</b>	ADVANCED LIGO
<b>SUB-SYSTEM</b>	AOS
<b>NEXT ASSY</b>	D1200174

<b>PART NAME</b>					ALIGO, PCAL PERISCOPE FRAME				
<b>DESIGNER</b>	S. SHANKLE	13 JUL 2012	<b>SIZE</b>	<b>DWG. NO.</b>		<b>REV.</b>			
<b>DRAFTER</b>	S. SHANKLE	09 JUL 2012	c	D1200993		v3			
<b>CHECKER</b>	S. SHANKLE	09 JUL 2012							
<b>APPROVAL</b>	S. SHANKLE	09 JUL 2012	<b>SCALE:</b> 1:12	<b>PROJECTION:</b>			SHEET 1 OF 2		

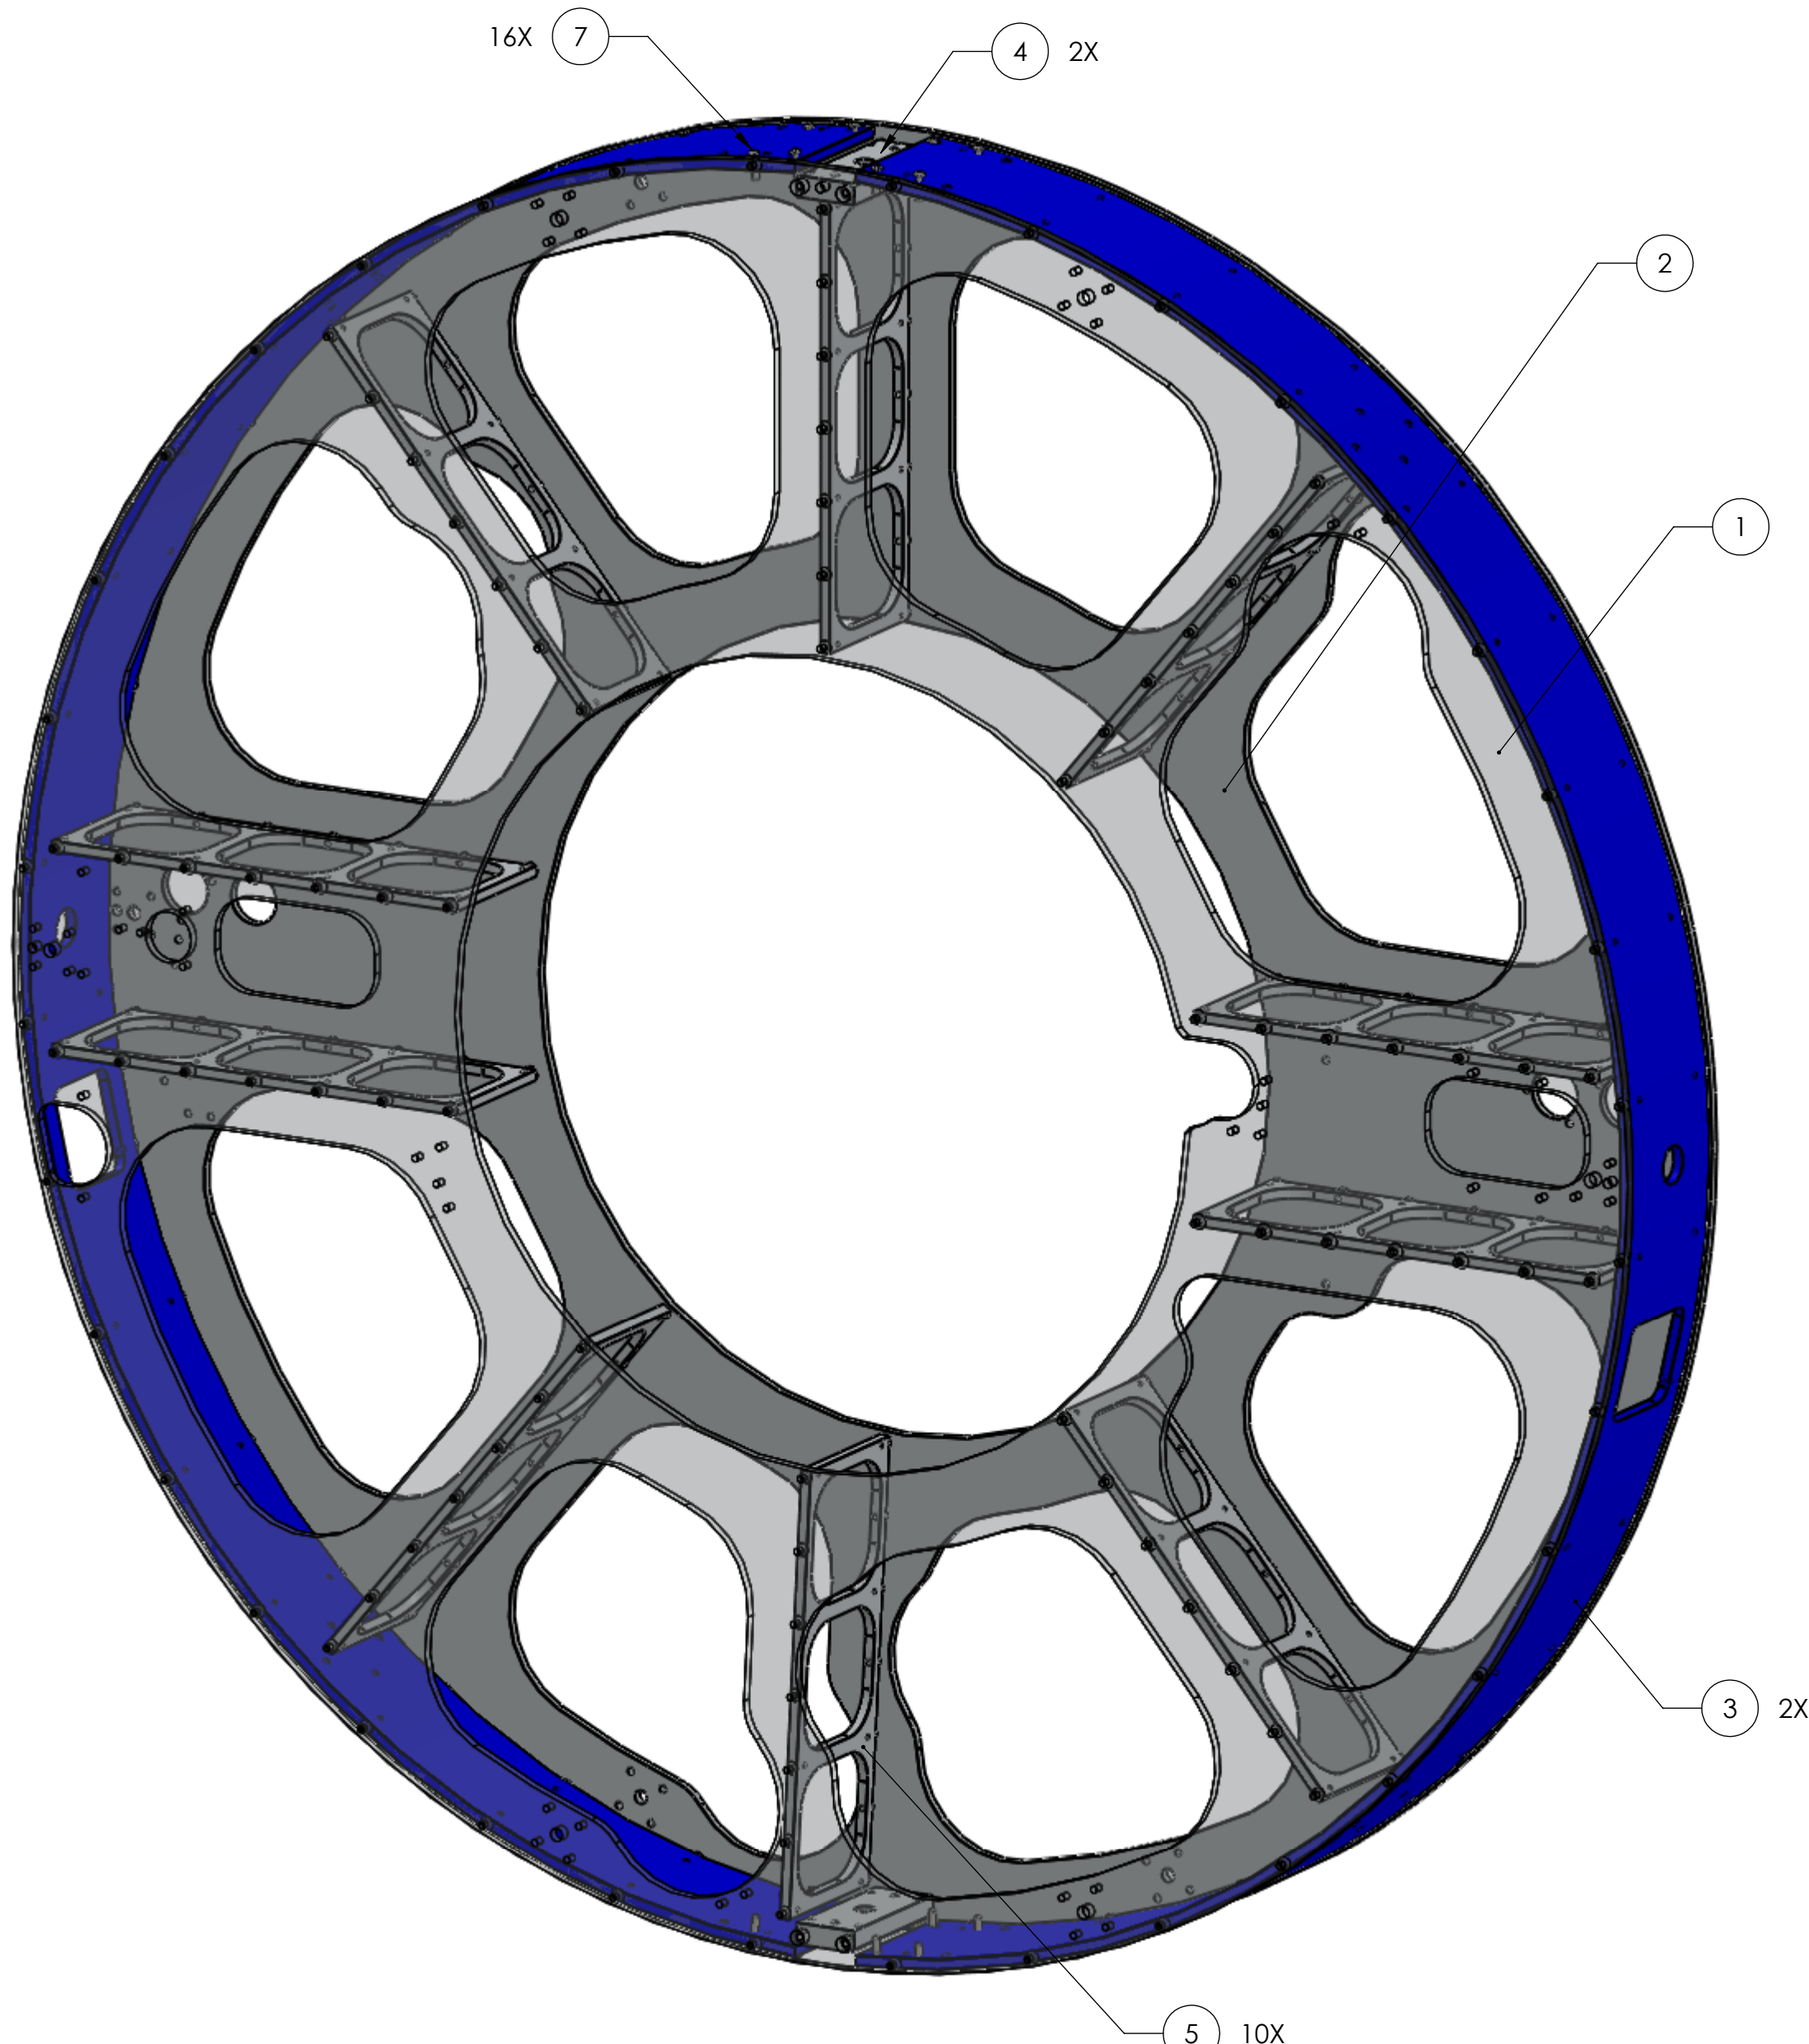

**D1200993-2 ALIGO, PCAL PERISCOPE FRAME (ETMX)**

6	220	FA-2008	SCRW FLT HD 1/4-20 X .50LG VENTED	UC COMPONENTS
5	10	D1200725	PCAL PLATE STRUT	
4	2	D1200731	PCAL PLATE RING CONNECTOR	
3	2	D1102354	PCAL SUSPENSION RING RECEIVE SIDE	
2	1	D1200727-2	PCAL PLATE MIRROR MTG	
1	1	D1200726-2	PCAL PLATE CAMERA MIRROR MTG	
ITEM NO.	QTY.	PART NUMBER	DESCRIPTION	SUPPLIER
BOM Table				


**CALIFORNIA INSTITUTE OF TECHNOLOGY**  
**MASSACHUSETTS INSTITUTE OF TECHNOLOGY**

SIZE	DWG. NO.	REV.
<b>C</b>	<b>D1200993</b>	<b>v3</b>
SCALE: 1:12	PROJECTION:	SHEET 2 OF 2