


1. CLEAR ANODIZE PER MIL-A-8625

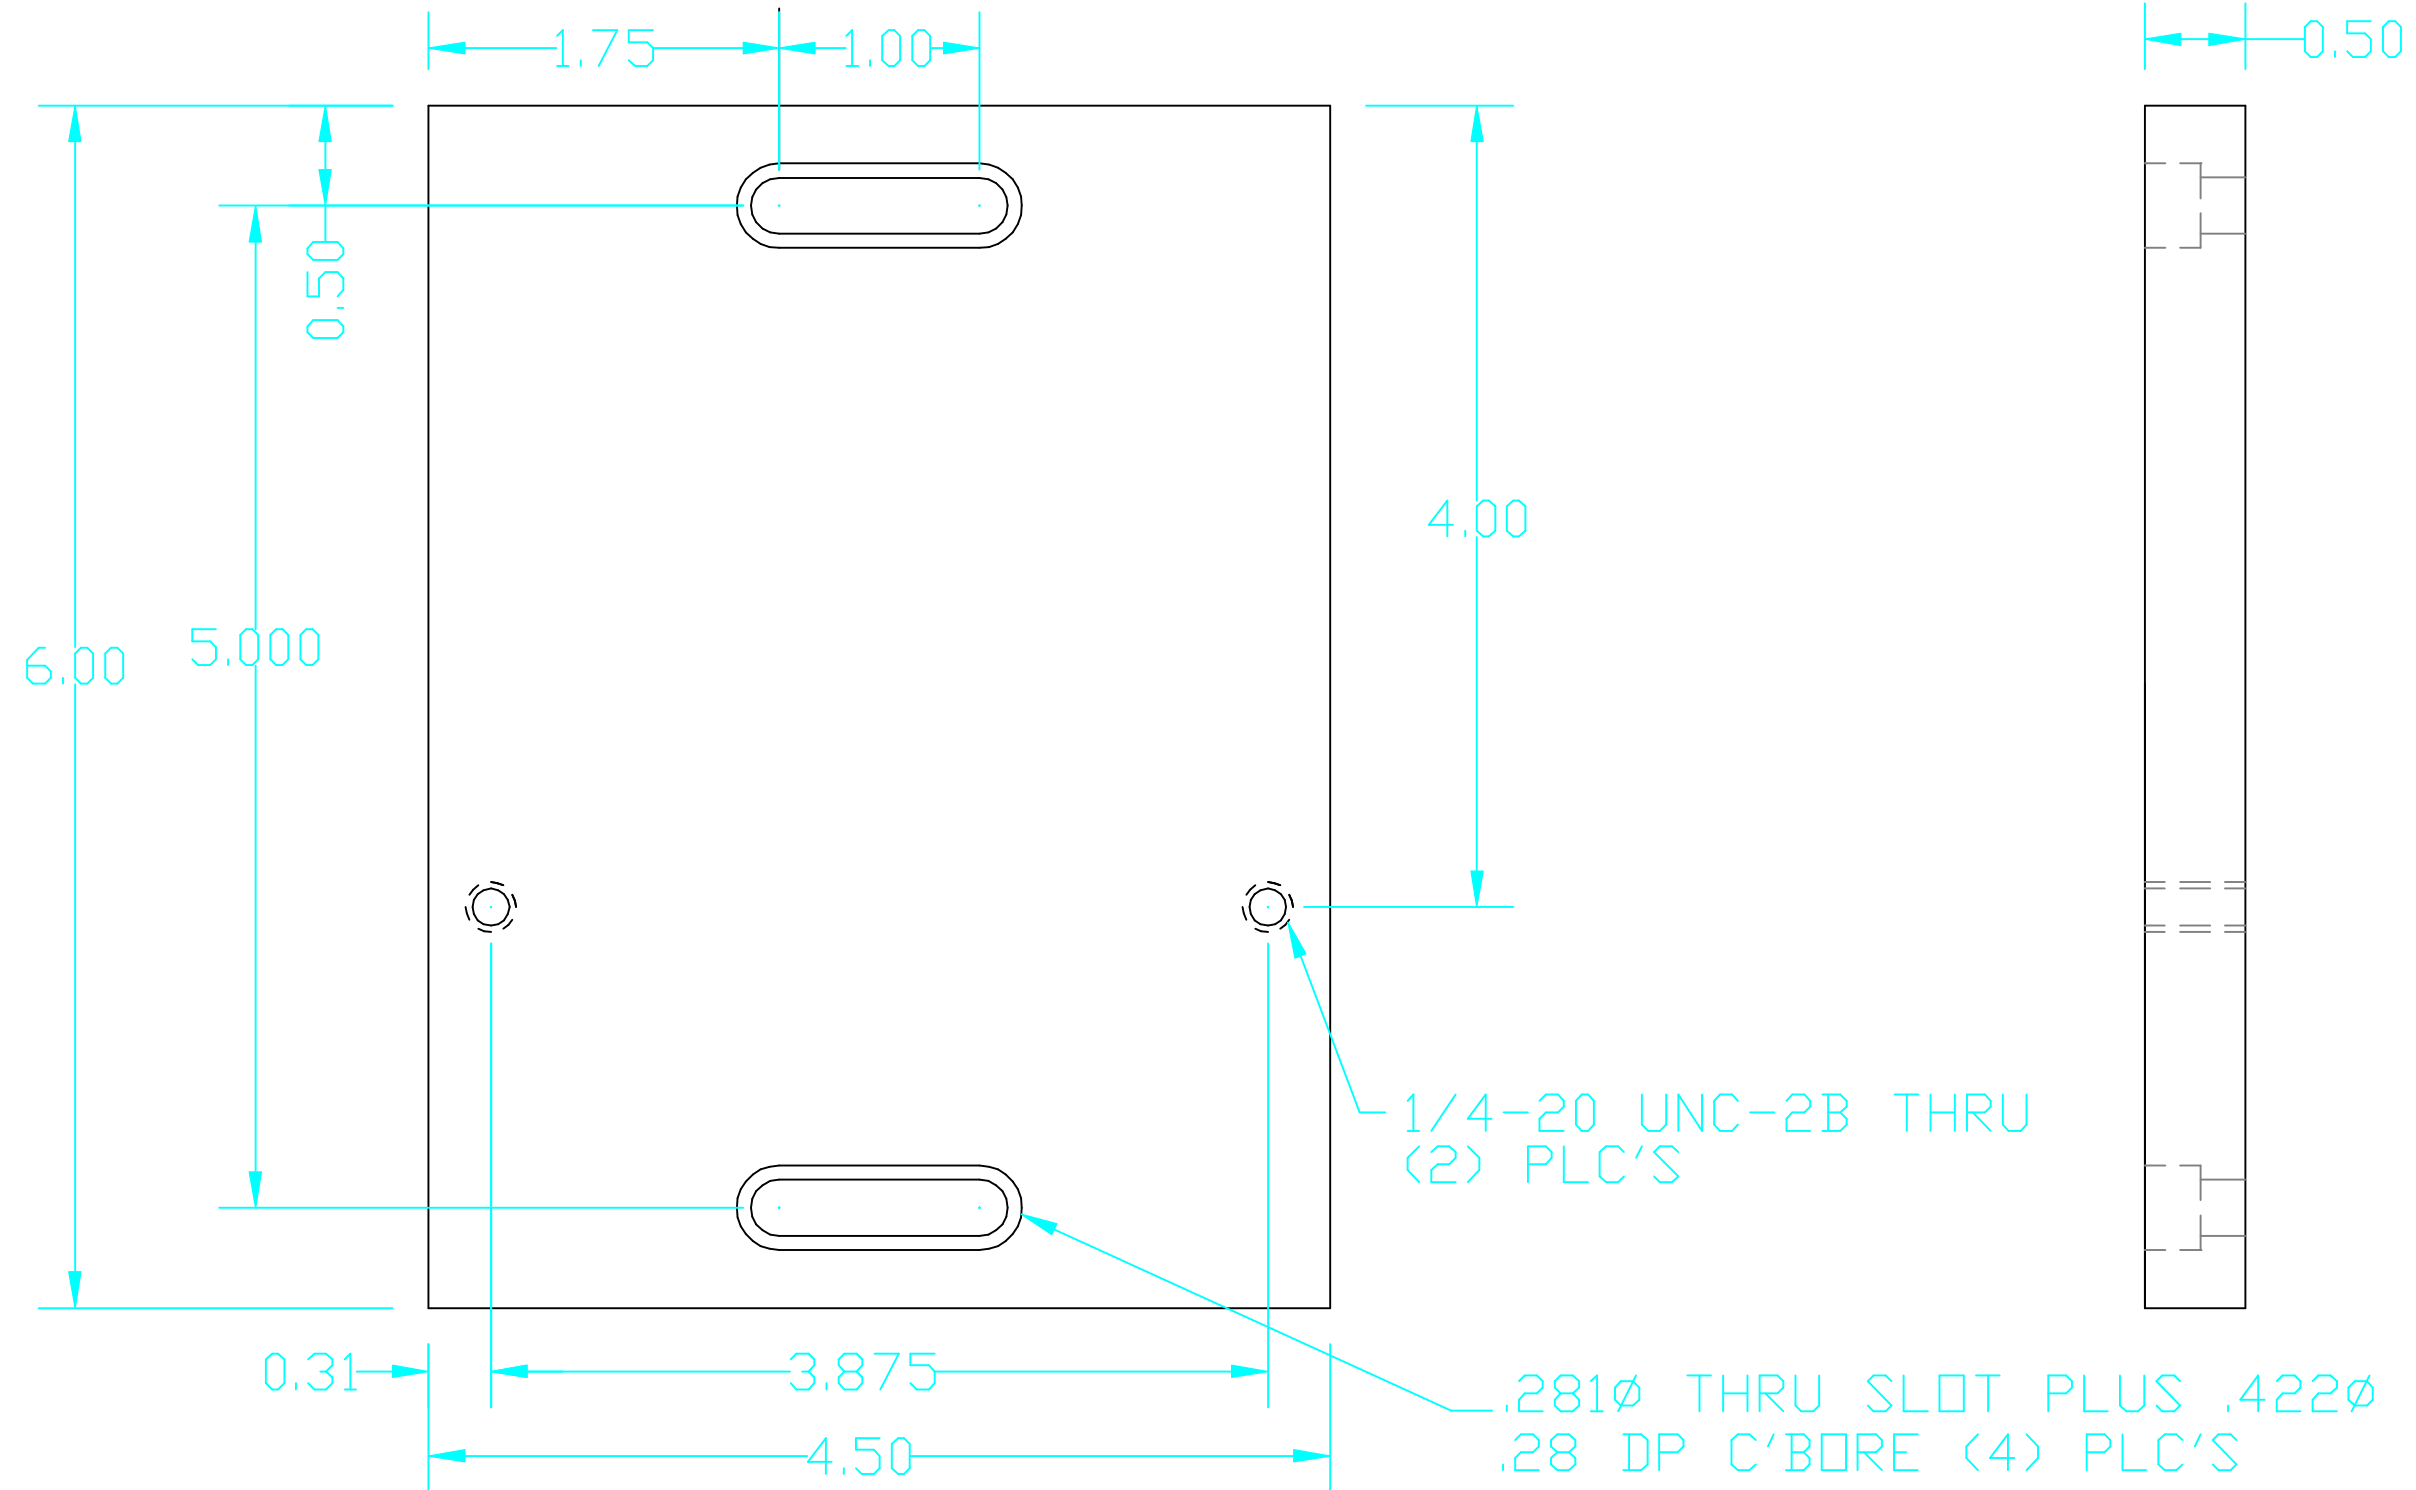

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES												MIT CALIFORNIA INSTITUTE OF TECHNOLOGY MASSACHUSETTS INSTITUTE OF TECHNOLOGY																					
		TOLERANCES: FRACTIONAL ±1/16(.16) ANGULAR ± 1° TWO PLACE DECIMAL ±.01(.025) THREE PLACE DECIMAL ±.005(.013)		FINISHED SURFACE RMS 63 BREAK CORNERS IN: .02 REMOVE ALL BURRS												ADJUST PLATE ISC TABLE LSC PHOTODIODE ASSEMBLY																			
		MATERIAL: 6061-T6 ALUM.		HEAT TREAT: -		FINISH: -		A INITIAL RELEASE		MASON 3/00		CAD FILE D990345-A.dwg		SIZE DWG. NO. B D990345-A-D																					
DWG. NO.		DESCRIPTION		USED ON: D980327-A		NEXT ASS'Y: -		REV		DESCRIPTION		DCC		SYS		DET		CDS		VE		CC		BT		CHECK		DRWN		DATE		SCALE FULL		SHEET 1 OF 1	