


NOTES: (UNLESS OTHERWISE SPECIFIED)

1. MINIMUM LENGTH OF CABLE 7 IN.,
MAXIMUM LENGTH OF CABLE 12 IN

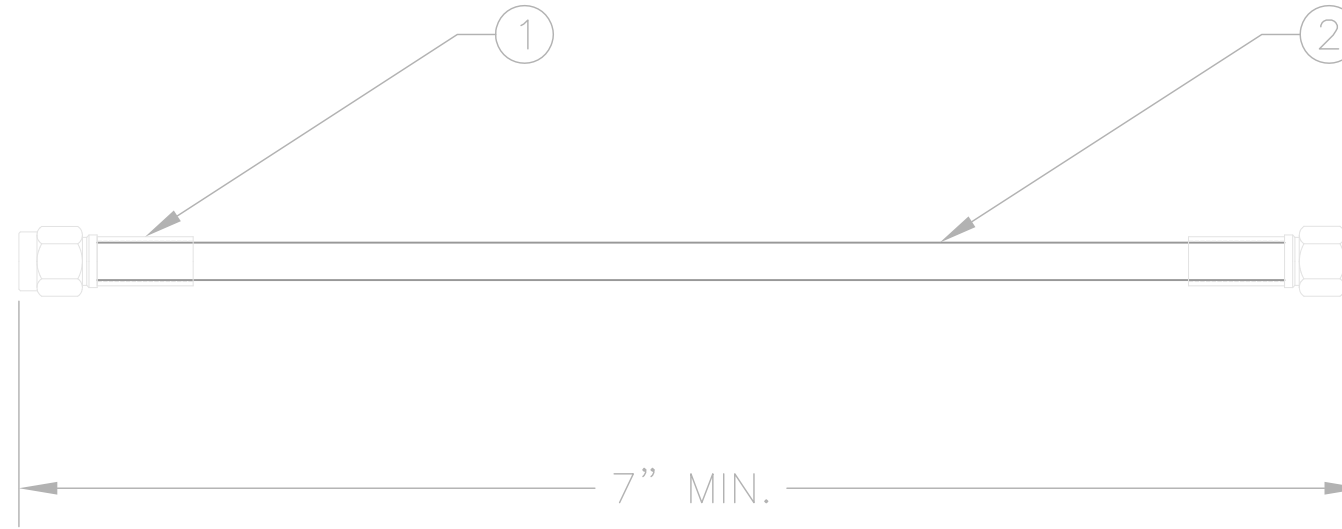

| REV. | DATE | DCN # | DRAWING TREE # |
|------|------|-------|----------------|
| | | | |
| | | | |

| ITEM NO. | REQ. | SPARE | TOT. | PART NUMBER | DESCRIPTION | SUPPLIER |
|----------|------|-------|------|-------------|---|---------------------|
| 1 | 1 | 0 | 1 | LMR-195-FR | FLEXIBLE LOW LOSS COAX CABLE | ALLIED WIRE & CABLE |
| 1 | 2 | 0 | 2 | 132113 | SMA CRIMP PLUG FOR RG-58C/U, 58/U CABLE | AMPHENOL CONNEX |

| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES | | | | PARTS LIST | |
|--|--|-----------|---------|--|--------------|
| TOLERANCES: .XX ±: 0.010 .XXX ±: 0.005 ANGULAR: ± | | DATE | NAME | LIGO CALIFORNIA INSTITUTE OF TECHNOLOGY MASSACHUSETTS INSTITUTE OF TECHNOLOGY | |
| DRAWN | | 11/29/12 | P. KING | SYSTEM aLIGO | |
| CHECKED | | | | SUB-SYSTEM PRE-STABILISED LASER (PSL) | |
| | | | | NEXT ASSY aLIGO PSL VCO AMPLIFIER | |
| | | COMMENTS: | | PART NAME aLIGO PSL VCO AMPLIFIER SMA CABLE | |
| MATERIAL | | | | SIZE/DWG. NO. | REV |
| FINISH | | | | B D1201428 | v1 |
| SEE NOTES | | | | SCALE: N/A | SHEET 1 OF 1 |