


8 7 6 5 4 3 2 1

**NOTES CONTINUED:**  
2. WEIGHT: 0.19 LB.

REV.	DATE	DCN #	BOM #
v1	20 JUN 2013	-	-

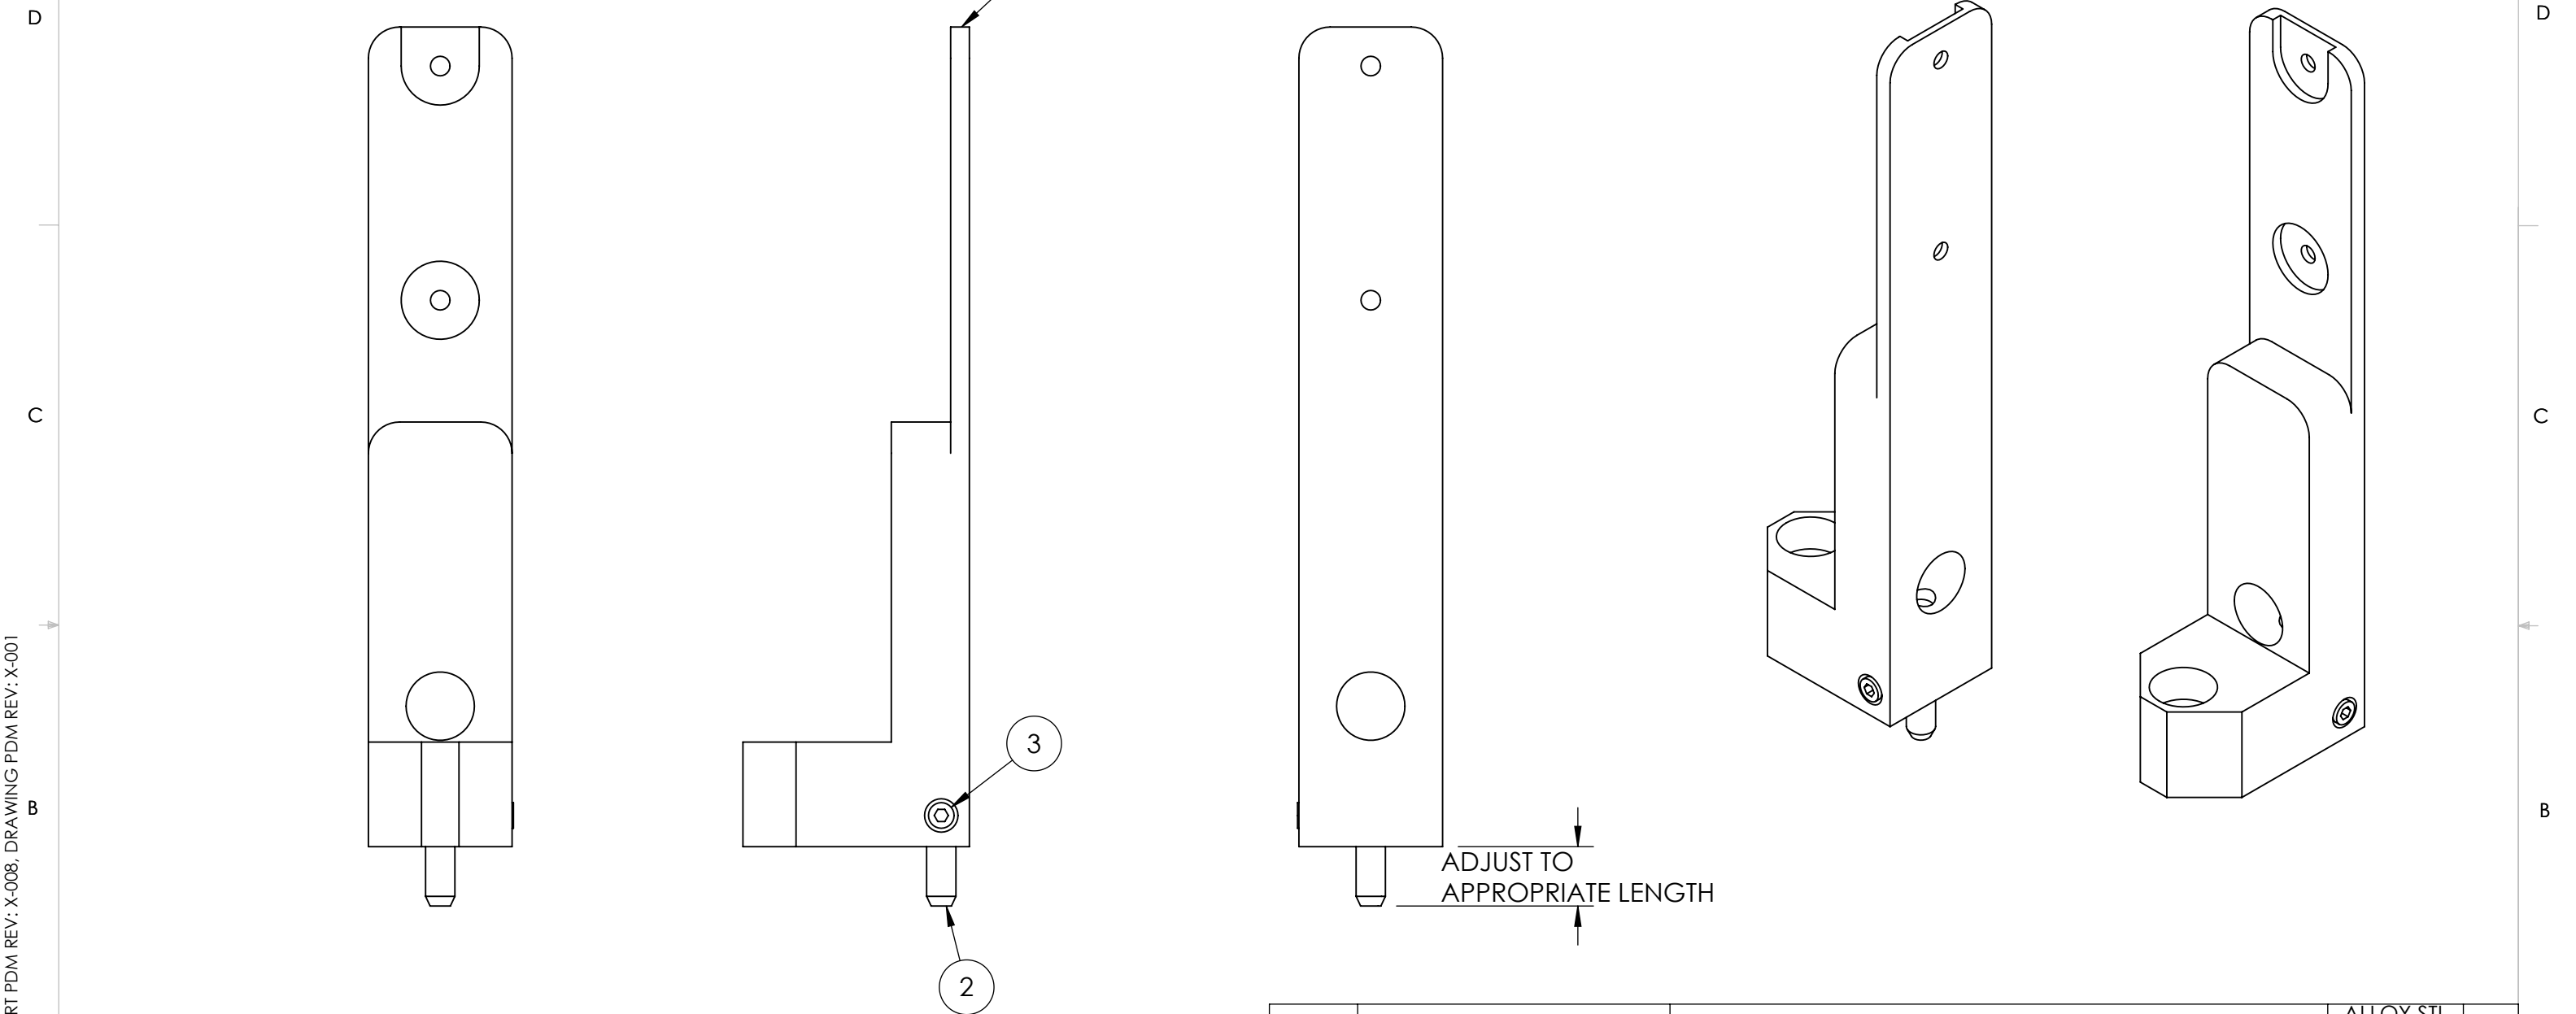

ITEM NO.	PART NUMBER	DESCRIPTION	MATERIAL	REQ
3	94355A192 (McM-Carr) or equiv	SCREW, SOCKET SET, FLAT POINT, #8-32 UNC-2A X 0.3125 LONG	ALLOY STL OR SSTL	1
2	98381A510 (McM-Carr) or equiv per ASME B18.8.2	DOWEL PIN, 3/16D, 1L	ALLOY STL	1
1	D1200171	aLIGO PCAL TOOLING, ALIGNMENT FLAG BASE	6061-T6 Al	1

**NOTES AND TOLERANCES: (UNLESS OTHERWISE SPECIFIED)**

1. INTERPRET DRAWING PER ASME Y14.5-1994.

DIMENSIONS ARE IN INCHES  
TOLERANCES:  
.XX ± N/A  
.XXX ± N/A  
ANGULAR ± N/A°

**MATERIAL** N/A **FINISH** N/A

**SYSTEM** ADVANCED LIGO **SUB-SYSTEM** AOS **PART NAME** aLIGO PCAL TOOLING, ALIGNMENT FLAG

**DESIGNER** R. SAVAGE **DATE** 20 FEB 2013 **SIZE** B **DWG. NO.** D1300138 **REV.** v1  
**DRAFTER** C. CONLEY **DATE** 20 JUN 2013  
**CHECKER** **APPROVAL**

**SCALE**: NONE **PROJECTION**: **SHEET** 1 OF 1

D1300138 aLIGO Pcal Tooling, Alignment Flag, PART PDM REV: X-008, DRAWING PDM REV: X-001

8 7 6 5 4 3 2 1