REVISIONS												
LTR	ZONE	DESCRIPTION	DWN	CHK	P-ENG	CONFIG	ME	STRS	MATL	PROJ	QA	RELEASE DATE
A		INITIAL RELEASE										

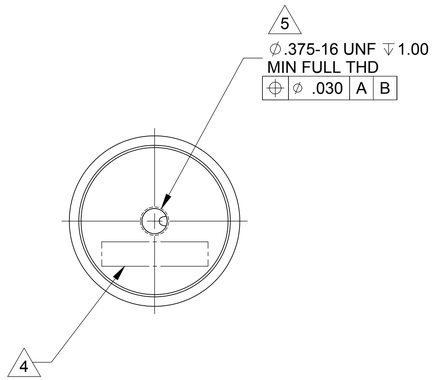

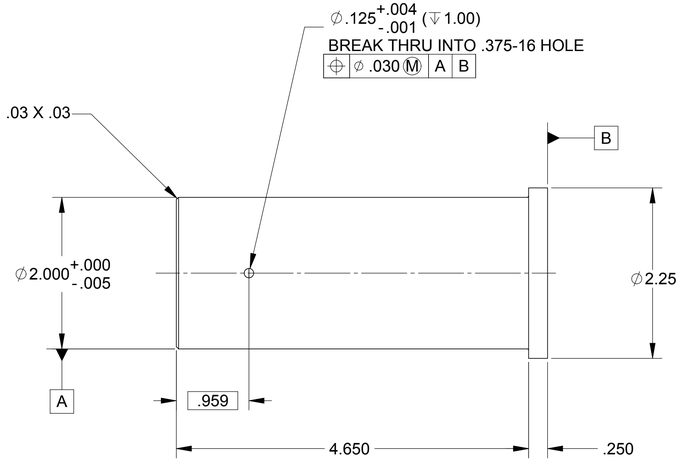

NOTES: UNLESS OTHERWISE SPECIFIED.

1. ALL PARTS SHALL BE MANUFACTURED IN ACCORDANCE WITH ASI SPECIFICATION 20008225 (LIGO E048225).
2. REMOVE ALL BURRS AND SHARP EDGES .005-.015.
3. MACHINE FILLET RADII .003-.015.

△4 MARK PART AND SERIAL NUMBER IN LOCATION APPROXIMATELY AS SHOWN USING 0.13-INCH HIGH CHARACTERS IN ACCORDANCE WITH 20006686, TYPE I, CLASSES 4, 5, OR 6. SERIAL NUMBERS START AT 001 FOR FIRST PART AND PROCEED CONSECUTIVELY. PARTS TOO SMALL TO MARK SHALL BE IDENTIFIED IN ACCORDANCE WITH 20006686, TYPE II.

△5 THREADED HOLES SHALL BE PRODUCED TO A .004-.006 OVERSIZE CONDITION ON THE PITCH DIAMETER BASED ON A 2B CONDITION

6. COUNTERSINK 82° ALL TAPPED HOLES TO MAJOR DIAMETER +.015/-.000.
7. COUNTERSINK 82° ALL DRILLED HOLES .015-.030 DEEP BOTH SIDES.
8. RECORD WEIGHT TO NEAREST 0.1 LB ON INSPECTION REPORT AFTER FINAL MACHINING. ESTIMATED WEIGHT IS 4.3 LBS.

THIS DOCUMENT MAY CONTAIN ITAR CONTROLLED INFORMATION
AND/OR COMMERCE CONTROLLED INFORMATION
EXPORT RESTRICTIONS MAY APPLY

FILE ATTACHMENTS
20008045 Lift Hook Pin.x_t

20008045-1

PARTS LIST

QTY REQD	ITEM NO	REF DES	CAGE NO	PART OR IDENTIFYING NO	NOMENCLATURE OR DESCRIPTION	SPECIFICATION	MATERIAL OR NOTE	ZONE

CONTRACT NO

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES
DECIMALS .XX ±.03 .XXX ±.010
ANGLES ± 1/2"
MACHINE FINISH 125
DO NOT SCALE DRAWING
INTERPRET DWG PER ASME Y14.5M-1994

MATERIAL
CRES 303 FORGING
PER ASTM A473

RELEASED
2/22/2005
THIS DRAWING IS RELEASED ONLY AND NOT UNDER CONFIGURATION CONTROL UNLESS A RED RELEASED STAMP APPEARS ON THIS DRAWING

ALLIANCE SPACESYSTEMS, INC.
1250 Lincoln Ave., Suite 100
Pasadena, CA 91103

DWN KEVIN J SPINK 02/08/05			
PROJ ENGR	STRS		
CHK	MATL		
CONFIG	PROJ		
ME	QA		

PIN, LIFT HOOK
BSC ASSEMBLY
LIGO-D048045-A

20008048	1388
NEXT ASSEMBLY	PROJECT CODE
APPLICATION	

SIZE	CAGE CODE		REV
D	1KNU9	20008045	A
SCALE 1:1	UNCLASSIFIED	SHEET 1 OF 1	

REV 7/04